



江苏泰工机械设备有限公司

Jiangsu Taigong Machinery Equipment Co., Ltd.

地址：江苏省无锡市梁溪区凤凰城29号

电话：0510-80215222

传真：0510-82601236

邮箱：158553680@qq.com

技术支持：13961848999




型号与标记:

Type Designations:

K F 37-Y 0.55-4P-24.99-M1-180°-A 减速机类型 结构形式 机座号 电机代号 电机功率、极数 传动比 安装形式 电机接线盒位置 输出轴或法兰方向	K F 37-Y 0.55-4P-24.99-M1-180°-A Gear units type Structure Size Motor code Motor power, pole Ratio Mounting position Position of the motor thermal box Position of output shaft or flange																																												
减速机类型: 斜齿-螺旋锥齿轮减速机	Gear units type: Helical-bevel gear units																																												
结构形式: <table border="0"> <tr><td>普通轴伸式 (省略)</td><td></td></tr> <tr><td>轴装式</td><td>A</td></tr> <tr><td>轴伸法兰式</td><td>F</td></tr> <tr><td>轴装法兰式</td><td>AF</td></tr> <tr><td>轴装小法兰式</td><td>AZ</td></tr> <tr><td>轴装底脚式</td><td>AB</td></tr> <tr><td>轴装带防转臂</td><td>AT</td></tr> <tr><td>普通轴伸式, 轴输入</td><td>S</td></tr> <tr><td>普通轴装式, 轴输入</td><td>AS</td></tr> <tr><td>轴伸法兰式, 轴输入</td><td>FS</td></tr> <tr><td>轴装法兰式, 轴输入</td><td>AFS</td></tr> </table>	普通轴伸式 (省略)		轴装式	A	轴伸法兰式	F	轴装法兰式	AF	轴装小法兰式	AZ	轴装底脚式	AB	轴装带防转臂	AT	普通轴伸式, 轴输入	S	普通轴装式, 轴输入	AS	轴伸法兰式, 轴输入	FS	轴装法兰式, 轴输入	AFS	Structure: <table border="0"> <tr><td>Foot-mounted solid shaft output</td><td>(-)</td></tr> <tr><td>Hollow shaft output</td><td>A</td></tr> <tr><td>Flange-mounted solid shaft output</td><td>F</td></tr> <tr><td>Flange-mounted hollow shaft output</td><td>AF</td></tr> <tr><td>Short-flange-mounted hollow shaft output</td><td>AZ</td></tr> <tr><td>Foot-mounted hollow shaft output</td><td>AB</td></tr> <tr><td>Torque-arm-mounted hollow shaft output</td><td>AT</td></tr> <tr><td>Foot-mounted solid shaft output, shaft input</td><td>S</td></tr> <tr><td>Hollow shaft output, shaft input</td><td>AS</td></tr> <tr><td>Flange-mounted solid shaft output, shaft input</td><td>FS</td></tr> <tr><td>Flange-mounted hollow shaft output, shaft input</td><td>AFS</td></tr> </table>	Foot-mounted solid shaft output	(-)	Hollow shaft output	A	Flange-mounted solid shaft output	F	Flange-mounted hollow shaft output	AF	Short-flange-mounted hollow shaft output	AZ	Foot-mounted hollow shaft output	AB	Torque-arm-mounted hollow shaft output	AT	Foot-mounted solid shaft output, shaft input	S	Hollow shaft output, shaft input	AS	Flange-mounted solid shaft output, shaft input	FS	Flange-mounted hollow shaft output, shaft input	AFS
普通轴伸式 (省略)																																													
轴装式	A																																												
轴伸法兰式	F																																												
轴装法兰式	AF																																												
轴装小法兰式	AZ																																												
轴装底脚式	AB																																												
轴装带防转臂	AT																																												
普通轴伸式, 轴输入	S																																												
普通轴装式, 轴输入	AS																																												
轴伸法兰式, 轴输入	FS																																												
轴装法兰式, 轴输入	AFS																																												
Foot-mounted solid shaft output	(-)																																												
Hollow shaft output	A																																												
Flange-mounted solid shaft output	F																																												
Flange-mounted hollow shaft output	AF																																												
Short-flange-mounted hollow shaft output	AZ																																												
Foot-mounted hollow shaft output	AB																																												
Torque-arm-mounted hollow shaft output	AT																																												
Foot-mounted solid shaft output, shaft input	S																																												
Hollow shaft output, shaft input	AS																																												
Flange-mounted solid shaft output, shaft input	FS																																												
Flange-mounted hollow shaft output, shaft input	AFS																																												
规格: (见选型参数表)	Size: (see selection table)																																												
电机代号: <table border="0"> <tr><td>普通 (更新)</td><td>Y(Y2)</td></tr> <tr><td>防爆</td><td>B</td></tr> <tr><td>直流</td><td>Z</td></tr> <tr><td>制动</td><td>YEJ</td></tr> <tr><td>多速</td><td>D</td></tr> <tr><td>变频</td><td>YVP</td></tr> <tr><td>电磁调速</td><td>YCT</td></tr> <tr><td>冶金起重</td><td>R</td></tr> <tr><td>变频制动</td><td>YVPJ</td></tr> <tr><td>辊道</td><td>G</td></tr> </table>	普通 (更新)	Y(Y2)	防爆	B	直流	Z	制动	YEJ	多速	D	变频	YVP	电磁调速	YCT	冶金起重	R	变频制动	YVPJ	辊道	G	Motor code: <table border="0"> <tr><td>Ordinary(renew)</td><td>Y(Y2)</td></tr> <tr><td>Flame-proof</td><td>B</td></tr> <tr><td>Direct current</td><td>Z</td></tr> <tr><td>Brake</td><td>YEJ</td></tr> <tr><td>Multi-speed</td><td>D</td></tr> <tr><td>Variable frequency</td><td>YVP</td></tr> <tr><td>Electromagnetism speed modulation</td><td>YCT</td></tr> <tr><td>Hoisting in metallurgy</td><td>R</td></tr> <tr><td>Variable frequency and brake</td><td>YVPJ</td></tr> <tr><td>Roller tables</td><td>G</td></tr> </table>	Ordinary(renew)	Y(Y2)	Flame-proof	B	Direct current	Z	Brake	YEJ	Multi-speed	D	Variable frequency	YVP	Electromagnetism speed modulation	YCT	Hoisting in metallurgy	R	Variable frequency and brake	YVPJ	Roller tables	G				
普通 (更新)	Y(Y2)																																												
防爆	B																																												
直流	Z																																												
制动	YEJ																																												
多速	D																																												
变频	YVP																																												
电磁调速	YCT																																												
冶金起重	R																																												
变频制动	YVPJ																																												
辊道	G																																												
Ordinary(renew)	Y(Y2)																																												
Flame-proof	B																																												
Direct current	Z																																												
Brake	YEJ																																												
Multi-speed	D																																												
Variable frequency	YVP																																												
Electromagnetism speed modulation	YCT																																												
Hoisting in metallurgy	R																																												
Variable frequency and brake	YVPJ																																												
Roller tables	G																																												
电机功率、极数: (见选型参数表)	Motor power, pole : (see selection table)																																												
传动比: (见选型参数表)	Ratio: (see selection table)																																												
安装形式: M1、M2、M3、M4、M5、M6 (见第89页)	Mounting position: M1、M2、M3、M4、M5、M6(see page 89)																																												
电机接线盒位置: 0°、90°、180°、270° (见第89页)	Position of the motor thermal box: 0°、90°、180°、270° (see page 89)																																												
输出轴或法兰方向: <table border="0"> <tr><td>从电机尾部看左边为</td><td>A</td></tr> <tr><td>从电机尾部看右边为</td><td>B (见安装形式)</td></tr> <tr><td>从电机尾部看左右边为</td><td>A+B</td></tr> </table>	从电机尾部看左边为	A	从电机尾部看右边为	B (见安装形式)	从电机尾部看左右边为	A+B	Position of output shaft or flange: viewing on motor end:left side -A, right side-B,both sides-A+B(see mounting position)																																						
从电机尾部看左边为	A																																												
从电机尾部看右边为	B (见安装形式)																																												
从电机尾部看左右边为	A+B																																												

安装形式


Mounting position

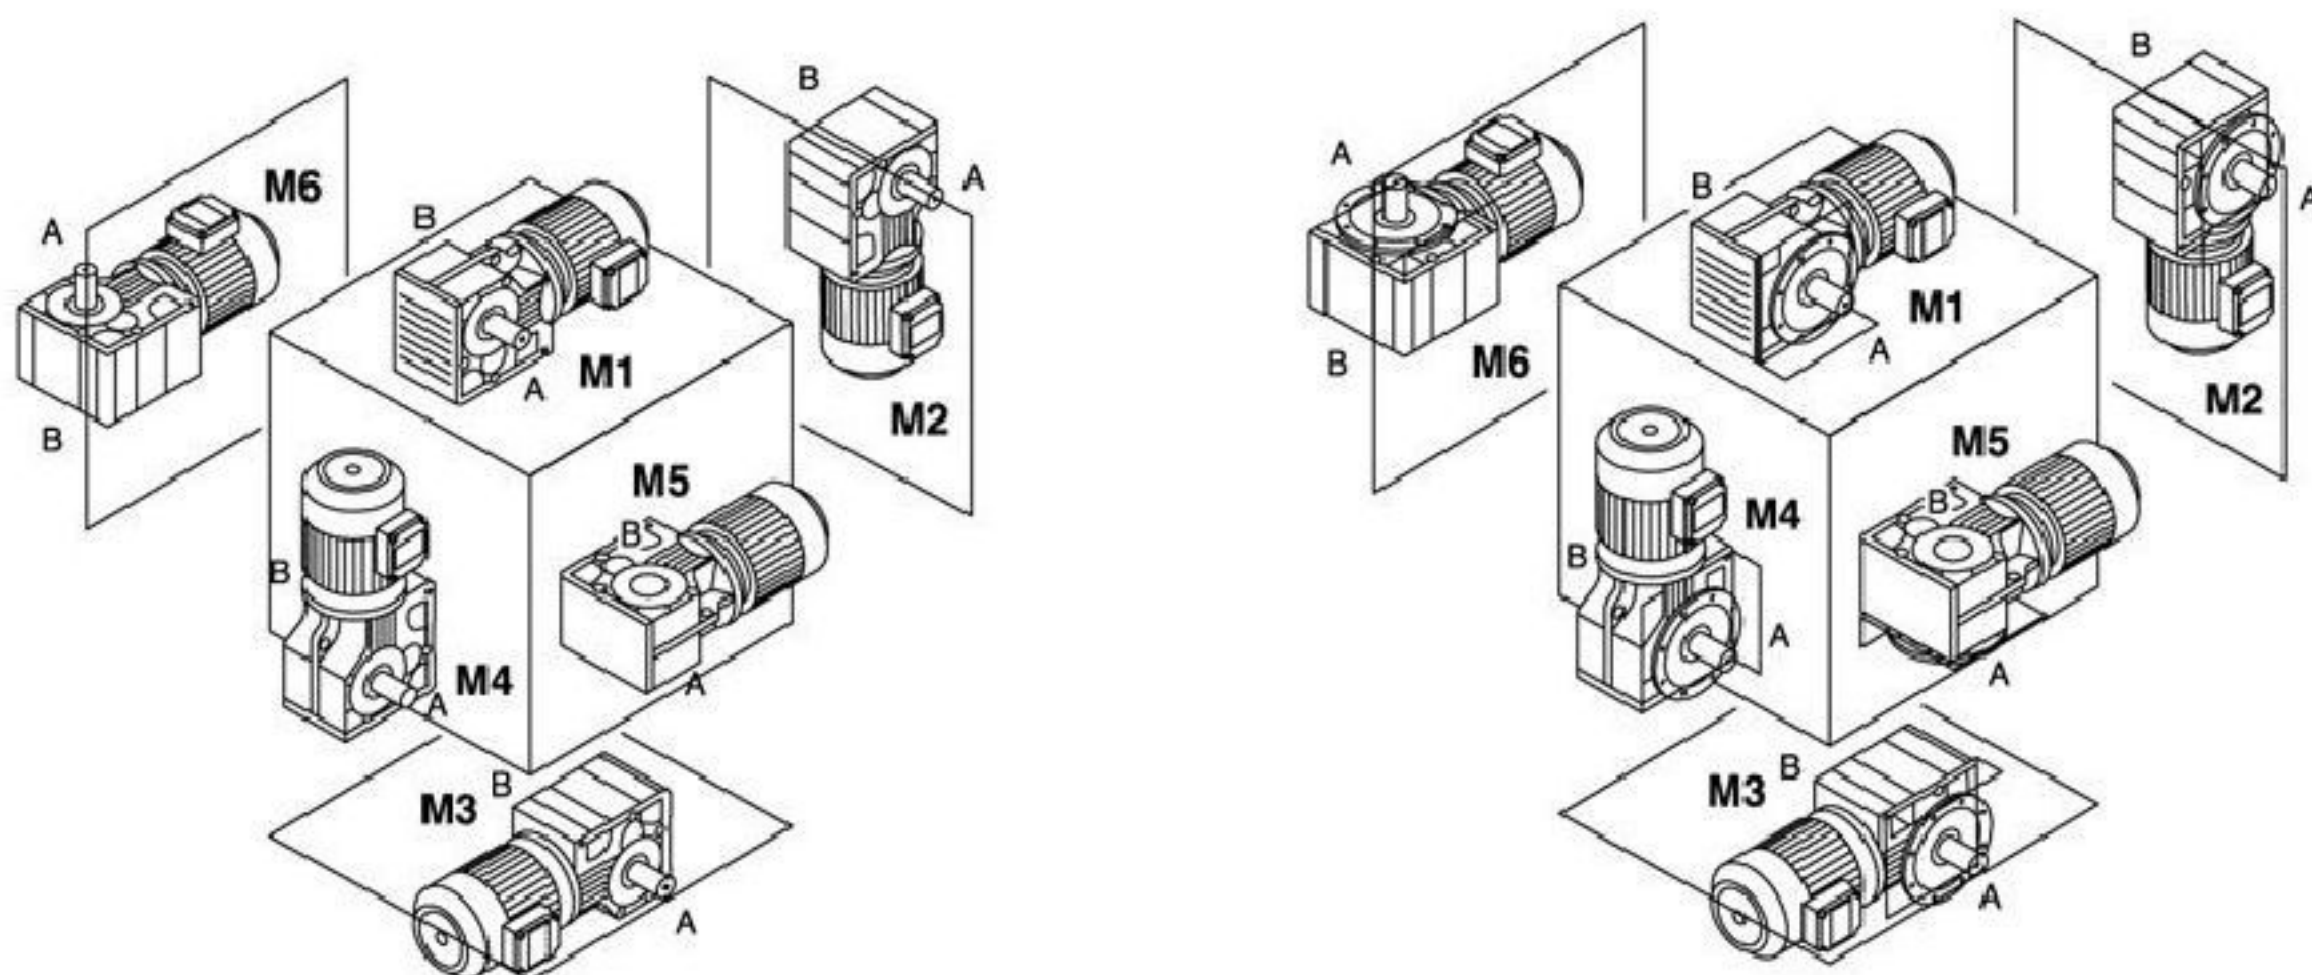


K

电机接线盒位置


Position of the motor thermal box




0°



90°



180°



270°

输入功率及许用转矩

Input power rating and permissible torque

规格 Size	37	47	57	67	77	87	97	107	127	157	167	187
结构形式 Structure	K KA KF KAF KAZ KAT KAB											
输入功率 Input power rating(kW)	0.18~3.0	0.18~3.0	0.18~5.5	0.18~5.5	0.37~11	0.75~22	1.1~30	3~45	7.5~90	11~160	11~200	18.5~200
传动比 Ratio	5.36~106.38	5.81~131.87	6.57~145.14	7.14~144.79	7.24~192.18	7.19~197.37	8.95~176.05	8.74~141.46	8.68~146.07	12.65~150.41	17.28~163.91	17.27~180.78
许用转矩 (N.m) Permissible torque	200	400	600	820	1550	2700	4300	8000	13000	18000	32000	50000

减速机重量

Gear unit weight

规格 Size	37	47	57	67	77	87	97	107	127	157	167	187
重量 (kg) Weight	11	20	27	33	57	85	130	250	380	610	1015	1700

所注重量为平均值, 仅供参考

The weights are mean values, only for reference.

润滑油量表 Lubrication table

K...,KAB...:

规格 Size	润滑油量 (升)			Fill quantity in liters		
	M1	M2	M3	M4	M5	M6
K..37	0.5	1	1	1.3	1	1
K..47	0.8	1.3	1.5	2	1.6	1.6
K..57	1.2	2.3	2.5	3	2.6	2.4
K..67	1.1	2.4	2.6	3.4	2.6	2.6
K..77	2.2	4.1	4.4	5.9	4.2	4.4
K..87	3.7	8	8.7	10.9	7.8	8
K..97	7	14	15.7	20	15.7	15.5
K..107	10	21	25.5	33.5	24	24
K..127	21	41.5	44	54	40	41
K..157	31	62	65	90	58	62
K..167	35	100	100	125	85	85
K..187	60	170	170	205	130	130

K

KF...:

规格 Size	润滑油量 (升)			Fill quantity in liters		
	M1	M2	M3	M4	M5	M6
KF37	0.5	1.1	1.1	1.5	1	1
KF47	0.8	1.3	1.7	2.2	1.6	1.6
KF57	1.3	2.3	2.7	3	2.9	2.7
KF67	1.1	2.4	2.8	3.6	2.7	2.7
KF77	2.1	4.1	4.4	6	4.5	4.5
KF87	3.7	8.2	9	11.9	8.4	8.4
KF97	7	14.7	17.3	21.5	15.7	16.5
KF107	10	22	26	35	25	25
KF127	21	41.5	46	55	41	41
KF157	31	66	69	92	62	62

KA.., KAF.., KAZ...:

规格 Size	润滑油量 (升)			Fill quantity in liters		
	M1	M2	M3	M4	M5	M6
K..37	0.5	1	1	1.4	1	1
K..47	0.8	1.3	1.6	2.1	1.6	1.6
K..57	1.3	2.3	2.7	3	2.9	2.7
K..67	1.1	2.4	2.7	3.6	2.6	2.6
K..77	2.1	4.1	4.6	6	4.4	4.4
K..87	3.7	8.2	8.8	11.1	8	8
K..97	7	14.7	15.7	20	15.7	15.7
K..107	10	20.5	24	32	24	24
K..127	21	41.5	43	52	40	40
K..157	31	66	67	87	62	62
KA..167	35	100	100	125	85	85
KA..187	60	170	170	205	130	130



输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p
0.18kW						0.18kW					
0.09	16482	14975	0.74			1.5	994	903	0.78		
0.11	13692	12440	0.89			1.8	873	793	0.88		
0.13	12013	10914	1.0			2.0	767	697	1.0		
0.14	10807	9819	1.1			2.3	675	613	1.1	K 67R37	4
0.16	9293	8443	1.3	K 127R77	4	2.6	597	542	1.3	KF 67R37	4
0.19	8236	7483	1.5	KF 127R77	4	3.0	518	471	1.5	KA 67R37	4
0.21	7226	6565	1.7	KA 127R77	4	3.3	462	420	1.7	KAF67R37	4
0.24	6388	5804	1.9	KAF127R77	4	3.9	397	361	1.9		
0.28	5533	5027	2.2			4.3	356	323	2.2		
0.31	4868	4423	2.5			5.1	299	272	2.6		
0.37	4184	3801	2.9								
0.43	3563	3237	3.4			2.3	677	615	0.8		
						2.6	599	544	0.9		
						2.9	521	473	1.1		
0.17	9037	8211	0.8			3.3	463	421	1.2		
0.19	7888	7167	1.0			3.8	398	362	1.4	K 57R37	4
0.23	6711	6097	1.1			4.4	351	319	1.6	KF 57R37	4
0.25	6144	5582	1.2			5.1	300	273	1.9	KA 57R37	4
0.27	5575	5065	1.3	K 107R77	4	5.8	264	240	2.1	KAF57R37	4
0.32	4732	4299	1.6	KF 107R77	4	6.5	237	215	2.4		
0.37	4135	3757	1.8	KA 107R77	4	7.2	211	192	2.7		
0.43	3562	3236	2.1	KAF107R77	4	8.4	183	166	3.1		
0.48	3158	2869	2.4								
0.56	2756	2504	2.7			3.7	413	375	0.9		
0.63	2425	2203	3.1			4.3	359	326	1.0		
						4.8	318	289	1.2	K 47R37	4
0.30	5139	4669	0.79			5.6	275	250	1.4	KF 47R37	4
0.34	4493	4082	0.90			6.2	248	225	1.5	KA 47R37	4
0.39	3944	3583	1.0			7.0	218	198	1.7	KAF47R37	4
0.45	3421	3108	1.2			8.3	184	167	2.0		
0.50	3035	2757	1.3			9.3	164	149	2.3		
0.57	2662	2419	1.5			11	141	128	2.7		
0.65	2337	2123	1.7	K 97R57	4						
0.75	2043	1856	2.0	KF 97R57	4	6.8	226	205	0.83	K 37R17	4
0.86	1789	1625	2.3	KA 97R57	4	7.7	199	181	0.94	KF 37R17	4
0.97	1574	1430	2.6	KAF97R57	4	8.7	176	160	1.07	KA 37R17	4
1.1	1388	1261	2.9			10	150	136	1.26	KAF37R17	4
1.3	1213	1102	3.3			11	140	127	1.34		
1.5	1053	957	3.8								
1.6	941	855	4.3			5.9	275	144.79	2.8	K 67	6
1.9	818	743	4.9			6.9	235	123.54	3.3	KF 67	6
2.1	717	651	5.6			7.9	205	108.03	3.8	KA 67	6
						8.3	195	102.62	4.0	KAF67	6
0.45	3420	3107	0.74								
0.51	3003	2728	0.85			9.6	168	144.79	4.6	K 67	4
0.59	2610	2371	0.97			11	144	123.54	5.4	KF 67	4
0.67	2298	2088	1.1			13	126	108.03	6.1	KA 67	4
0.75	2041	1854	1.2	K 87R57	4						
0.84	1825	1658	1.4	KF 87R57	4						
1.0	1557	1415	1.6	KA 87R57	4						
1.1	1353	1229	1.9	KAF87R57	4						
1.3	1187	1078	2.1			5.9	276	145.14	2.0	K 57	6
1.5	1047	951	2.4			6.9	235	123.85	2.4	KF 57	6
1.7	921	837	2.8			7.8	206	108.29	2.7	KA 57	6
1.9	799	726	3.2			8.3	196	102.88	2.9	KAF57	6
						9.4	172	90.26	3.3		
0.9	1666	1514	0.9			9.6	169	145.14	3.3		
1.0	1528	1388	1.0			11	144	123.85	3.9	K 57	4
1.1	1341	1218	1.1			13	126	108.29	4.5	KF 57	4
1.3	1159	1053	1.3	K 77R37	4	14	120	102.88	4.7	KA 57	4
1.5	1017	924	1.4	KF 77R37	4	15	105	90.26	5.4	KAF57	4
1.7	897	815	1.6	KA 77R37	4	18	89	76.56	6.3		
2.0	780	709	1.9	KAF77R37	4						
2.2	685	622	2.1			6.4	251	131.87	1.50	K 47	6
2.5	608	552	2.4			7.0	231	121.48	1.63	KF 47	6
2.9	534	485	2.7			8.1	198	104.37	1.90	KA 47	6
3.2	471	428	3.1			9.4	173	90.86	2.2	KAF47	6
3.8	404	367	3.6			10	162	85.12	2.3		



TAIGONG
泰工减速机

K

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p
0.18kW						0.25kW					
11	153	131.87	2.5	K 47 KF 47 KA 47 KAF47	4	0.86	2484	1625	1.6	K 97R57 KF 97R57 KA 97R57 KAF97R57	4
12	141	121.48	2.7		4	1.0	2186	1430	1.8		4
13	121	104.37	3.1		4	1.1	1928	1261	2.1		4
15	106	90.86	3.6		4	1.3	1685	1102	2.4		4
16	99	85.12	3.8		4	1.5	1463	957	2.8		4
						1.6	1307	855	3.1		
8.0	202	106.38	0.93	K 37	6	0.7	3192	2088	0.80	K 87R57 KF 87R57 KA 87R57 KAF87R57	4
8.7	186	97.81	1.01	KF 37	6	0.7	2834	1854	0.90		4
10	159	83.69	1.18	KA 37	6	0.8	2535	1658	1.0		4
12	138	72.54	1.36	KAF37	6	1.0	2163	1415	1.2		4
						1.1	1879	1229	1.4		4
						1.3	1648	1078	1.5		4
						1.5	1454	951	1.7		4
						1.7	1280	837	2.0		4
						1.9	1110	726	2.3	K 77R37 KF 77R37 KA 77R37 KAF77R37	4
						2.2	975	638	2.6		4
						1.3	1610	1053	0.9		4
						1.5	1413	924	1.0		4
						1.7	1246	815	1.2		4
						2.0	1084	709	1.3		4
						2.2	951	622	1.5		4
						2.5	844	552	1.7		4
						2.9	741	485	2.0		4
						3.2	654	428	2.2		4
						3.9	547	358	2.7		4
						4.3	489	320	3.0		4
						4.9	433	283	3.4	K 67R37 KF 67R37 KA 67R37 KAF67R37	4
						5.7	376	246	3.9		4
						6.4	330	216	4.4		4
						7.3	292	191	5.0		4
						8.2	260	170	5.6		4
						2.3	937	613	0.8		4
						2.6	829	542	0.9		4
						3.0	720	471	1.1		4
						3.3	642	420	1.2		4
						3.9	552	361	1.4		4
						4.3	494	323	1.6		4
						5.1	416	272	1.9	K 57R37 KF 57R37 KA 57R37 KAF57R37	4
						5.8	367	240	2.1		4
						6.4	332	217	2.3		4
						3.3	644	421	0.9		4
						3.8	553	362	1.0		4
						4.4	488	319	1.2		4
						5.1	417	273	1.4		4
						5.8	367	240	1.5		4
						6.5	329	215	1.7		4
						7.2	294	192	1.9	K 77 KF 77 KA 77 KAF77	8
						8.4	254	166	2.2		8
						9.9	216	141	2.6		8
						11	193	126	2.9		8
						13	165	108	3.4		8
						15	145	95	3.9		8
						4.2	536	154.02	2.7		6
						4.8	471	135.28	3.1		6
						5.0	447	128.52	3.3		6
						5.7	395	113.56	3.7		6
						4.4	507	192.18	2.9	K 77 KF 77 KA 77 KAF77	6
						4.7	474	179.37	3.1		6
						5.5	407	154.02	3.6		6
						6.3	357	135.28	4.1		6

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p
0.25kW						0.37kW					
5.2	430	123.54	1.8	K 67	8	0.19	16930	7483	0.72		
6.0	376	108.03	2.1	KF 67	8	0.21	14853	6565	0.82		
6.3	357	102.62	2.2	KA 67	8	0.24	13131	5804	0.93	K 127R77	4
7.2	313	90.04	2.5	KAF67	8	0.28	11373	5027	1.07	KF 127R77	4
						0.31	10007	4423	1.22	KA 127R77	4
5.9	382	144.79	2.0	K 67	6	0.37	8600	3801	1.42	KAF127R77	4
6.9	326	123.54	2.4	KF 67	6	0.43	7324	3237	1.67		
7.9	285	108.03	2.7	KA 67	6	0.72	4357	1926	2.80		
8.3	271	102.62	2.8	KAF67	6	0.79	3975	1757	3.07		
						0.90	3486	1541	3.51		
9.6	234	144.79	3.3	K 67	4	0.37	8500	3757	0.88		
11	199	123.54	3.9	KF 67	4	0.43	7321	3236	1.03		
13	174	108.03	4.4	KA 67	4	0.48	6491	2869	1.16		
14	166	102.62	4.7	KAF67	4	0.56	5665	2504	1.33	K 107R77	4
5.9	383	145.14	1.5	K 57	6	0.63	4984	2203	1.51	KF 107R77	4
6.9	327	123.85	1.7	KF 57	6	0.74	4229	1869	1.78	KA 107R77	4
7.8	286	108.29	2.0	KA 57	6	0.82	3821	1689	1.97	KAF107R77	4
8.3	272	102.88	2.1	KAF57	6	0.91	3468	1533	2.2		
9.4	238	90.26	2.4			1.06	2980	1317	2.5		
11	202	76.56	2.8			1.21	2602	1150	2.9		
9.6	234	145.14	2.4	K 57	4	0.65	4803	2123	0.84		
11	200	123.85	2.8	KF 57	4	0.75	4199	1856	0.96		
13	175	108.29	3.2	KA 57	4	0.86	3676	1625	1.10		
14	166	102.88	3.4	KAF57	4	0.97	3235	1430	1.25	K 97R57	4
15	146	90.26	3.9			1.1	2853	1261	1.42	KF 97R57	4
18	124	76.56	4.6			1.3	2493	1102	1.62	KA 97R57	4
6.4	348	131.87	1.08	K 47	6	1.5	2165	957	1.87	KAF97R57	4
7.0	321	121.48	1.17	KF 47	6	1.6	1934	855	2.1		
8.1	276	104.37	1.36	KA 47	6	1.9	1681	743	2.4		
9.4	240	90.86	1.57	KAF47	6	2.1	1473	651	2.7		
10	225	85.12	1.67			2.4	1296	573	3.1		
11	213	131.87	1.77	K 47	4	1.0	3201	1415	0.79		
11	196	121.48	1.92	KF 47	4	1.1	2781	1229	0.91		
13	169	104.37	2.2	KA 47	4	1.3	2439	1078	1.04		
15	147	90.86	2.6	KAF47	4	1.5	2152	951	1.18	K 87R57	4
16	137	85.12	2.7			1.7	1894	837	1.34	KF 87R57	4
10	221	83.69	0.9	K 37	6	1.9	1643	726	1.55	KA 87R57	4
12	192	72.54	1.0	KF 37	6	2.2	1443	638	1.76	KAF87R57	4
13	179	67.80	1.1	KA 37	6	2.5	1272	562	2.0		
15	155	58.60	1.2	KAF37	6	2.9	1072	474	2.4		
17	131	49.79	1.4			3.3	964	426	2.6		
						3.7	844	373	3.0		
13	172	106.38	1.1			1.7	1844	815	0.79		
14	158	97.81	1.2			2.0	1604	709	0.91		
17	135	83.69	1.4			2.2	1407	622	1.04		
19	117	72.54	1.6			2.5	1249	552	1.17	K 77R37	4
21	109	67.80	1.7			2.9	1097	485	1.33	KF 77R37	4
24	95	58.60	2.0			3.2	968	428	1.50	KA 77R37	4
28	80	49.79	2.3			3.9	810	358	1.80	KAF77R37	4
31	72	44.46	2.6			4.3	724	320	2.0		
37	61	37.97	3.1			4.9	640	283	2.3		
39	57	35.57	3.3	K 37	4	5.7	557	246	2.6		
46	48	29.96	3.9	KF 37	4	6.4	489	216	3.0		
48	47	28.83	4.0	KA 37	4	7.3	432	191	3.4		
56	40	24.99	4.7	KAF37	4	8.2	385	170	3.8		
60	38	23.36	4.9			9.3	339	150	4.3		
69	33	20.19	5.3			3.3	950	420	0.81		
81	28	17.15	6.1			3.9	817	361	0.94		
91	25	15.31	6.7			4.3	731	323	1.05		
106	21	13.08	7.3			5.1	615	272	1.25	K 67R37	4
114	20	12.14	7.7			5.8	543	240	1.42	KF 67R37	4
133	17	10.49	8.9			6.4	491	217	1.57	KA 67R37	4
156	14	8.91	10			7.3	432	191	1.78	KAF67R37	4
175	13	7.96	11			8.4	376	166	2.05		
204	11	6.80	13			9.7	326	144	2.37		
218	10	6.37	13			12	269	119	2.86		



输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数
Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole
r/min	Nm	i	f _B	Type	p	r/min	Nm	i	f _B	Type	p
0.37kW						0.37kW					
5.1	618	273	0.91	K 57R37 KF 57R37 KA 57R37 KAF57R37	4	8.5	392	104.37	0.96	K 47	6
5.8	543	240	1.04			KF 47	6				
6.5	486	215	1.16			KA 47	6				
7.2	434	192	1.30			KAF47	6				
8.4	376	166	1.50								
9.9	319	141	1.77								
11	285	126	1.98								
13	244	108	2.3								
15	215	95	2.6			11	315	131.87	1.19		
3.8	868	174.99	2.9	K 87 KF 87 KA 87 KAF87	8	12	290	121.48	1.30	K 47 KF 47 KA 47 KAF47	4
						13	249	104.37	1.51		
						15	217	90.86	1.73		
						16	203	85.12	1.85		
18	180	75.20	2.1								
20	167	69.84	2.3								
22	151	63.30	2.5			14	234	97.81	0.80		
4.5	740	197.27	3.4	K 87 KF 87 KA 87 KAF87	6	17	200	83.69	0.94		
						19	173	72.54	1.08		
						21	162	67.80	1.16		
						24	140	58.60	1.34		
5.0	671	135.28	2.2	K 77 KF 77 KA 77 KAF77	8	28	119	49.79	1.58		
						31	106	44.46	1.77		
						37	91	37.97	2.07		
						39	85	35.57	2.21	K 37 KF 37 KA 37 KAF37	4
46	72	29.96	2.63								
48	69	28.83	2.73								
56	60	24.99	3.15								
60	56	23.36	3.28								
69	48	20.19	3.60								
81	41	17.15	4.13								
91	37	15.31	4.5								
106	31	13.08	5.0								
114	29	12.14	5.2								
133	25	10.49	6.0								
156	21	8.91	7.1								
175	19	7.96	7.7								
204	16	6.80	8.7								
218	15	6.37	9.0								
259	13	5.56	10			0.55kW					
0.08	57099	16978	0.82	K 187R97 KA 187R97	4	0.10	47998	14272	0.98		
0.11	44111	13116	1.07								
0.12	39170	11647	1.20								
0.19	24662	7333	1.9								
0.12	38783	11532	0.78								
0.14	34395	10227	0.87	K 167R97 KA 167R97	4	0.16	28913	8597	1.04		
0.21	21988	6538	1.37								
0.26	18046	5366	1.67								
0.34	13651	4059	2.2								
0.20	23142	6881	0.73			K 157R97 KF 157R97 KA 157R97 KAF157R97	4				
0.23	19947	5931	0.85								
0.35	13365	3974	1.27								
0.46	10247	3047	1.65								
0.31	14875	4423	0.82								
0.37	12783	3801	0.96	K 127R77 KF 127R77 KA 127R77 KAF127R77	4	0.43	10886	3237	1.12		
0.47	9891	2941	1.24								
0.55	8569	2548	1.43								
0.72	6477	1926	1.89								
0.79	5909	1757	2.1								
0.90	5183	1541	2.4								
1.0	4513	1342	2.7								
1.2	3958	1177	3.1								
1.4	3447	1025	3.5								



输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p
0.55kW						0.55kW					
0.48	9649	2869	0.78	K 107R77 KF 107R77 KA 107R77 KAF107R77	4	3.8	1290	174.99	2.0	K 87	8
0.56	8421	2504	0.89			4.1	1209	164.05	2.1	KF 87	8
0.63	7409	2203	1.01			4.5	1084	147.09	2.3	KA 87	8
0.74	6286	1869	1.20							KAF87	8
0.82	5680	1689	1.32			4.5	1101	197.27	2.3	K 87	6
0.91	5156	1533	1.46			5.1	976	174.99	2.6	KF 87	6
1.1	4429	1317	1.70			5.4	915	164.05	2.8	KA 87	6
1.2	3868	1150	1.94			6.0	821	147.09	3.1	KAF87	6
1.4	3414	1015	2.2								
1.6	2929	871	2.6			6.5	755	135.28	1.9	K 77	8
1.8	2630	782	2.9			6.9	717	128.52	2.0	KF 77	8
2.0	2307	686	3.3			7.8	634	113.56	2.3	KA 77	8
2.3	2038	606	3.7			9.1	541	97.05	2.7	KAF77	8
1.0	4809	1430	0.8	K 97R57 KF 97R57 KA 97R57 KAF97R57	4	5.7	859	154.02	1.70	K 77	6
1.1	4241	1261	1.0			6.5	755	135.28	1.93	KF 77	6
1.3	3706	1102	1.1			6.9	717	128.52	2.0	KA 77	6
1.5	3218	957	1.3			7.8	634	113.56	2.3	KAF77	6
1.6	2875	855	1.4								
1.9	2499	743	1.6			9.0	547	154.02	2.7	K 77	4
2.1	2189	651	1.8			10	481	135.28	3.0	KF 77	4
2.4	1927	573	2.1			11	457	128.52	3.2	KA 77	4
2.8	1695	504	2.4			12	403	113.56	3.6	KAF77	4
3.2	1470	437	2.8			14	345	97.05	4.2		
3.6	1285	382	3.1	K 87R57 KF 87R57 KA 87R57 KAF87R57	4	7.2	689	123.54	1.12	K 67	6
4.6	1026	305	3.9			8.2	603	108.03	1.28	KF 67	6
1.5	3198	951	0.79			8.6	573	102.62	1.35	KA 67	6
1.7	2815	837	0.90			10	502	90.04	1.53	KAF67	6
1.9	2442	726	1.04			12	426	76.37	1.81		
2.2	2146	638	1.18			11	439	123.54	1.76	K 67	4
2.5	1890	562	1.34			13	384	108.03	2.0	KF 67	4
2.9	1594	474	1.59			15	320	90.04	2.4	KA 67	4
3.3	1433	426	1.77			18	271	76.37	2.8	KAF67	4
3.7	1254	373	2.0								
4.2	1110	330	2.3	K 77R37 KF 77R37 KA 77R37 KAF77R37	4	8.2	604	108.29	0.93	K 57 KF 57 KA 57 KAF57	6
4.7	985	293	2.6			8.6	574	102.88	0.98		
5.6	841	250	3.0			9.8	504	90.26	1.12		
5.9	794	236	3.2			12	427	76.56	1.32		
6.9	676	201	3.8			13	386	69.12	1.46	KA 57	6
2.5	1856	552	0.78			14	339	60.81	1.66	KAF57	6
2.9	1631	485	0.89			15	320	57.42	1.76		
3.2	1439	428	1.01			11	440	123.85	1.28	K 57 KF 57 KA 57 KAF57	4
3.9	1204	358	1.21			13	385	108.29	1.47		
4.3	1076	320	1.35			14	365	102.88	1.54		
4.9	952	283	1.53			15	321	90.26	1.76		
5.7	827	246	1.76			18	272	76.56	2.1		
6.4	726	216	2.0			20	246	69.12	2.3		
7.3	642	191	2.3			23	216	60.81	2.6		
8.2	572	170	2.5			24	204	57.42	2.8		
9.3	504	150	2.9	K 67R37 KF 67R37 KA 67R37 KAF67R37	4	13	371	104.37	1.01	K 47 KF 47 KA 47 KAF47	4
5.1	915	272	0.84			15	323	90.86	1.17		
5.8	807	240	0.95			16	302	85.12	1.24		
6.4	730	217	1.1			18	267	75.20	1.41		
7.3	642	191	1.2			20	248	69.84	1.52		
8.4	558	166	1.4			22	225	63.30	1.67		
9.7	484	144	1.6			24	202	56.83	1.86		
12	400	119	1.9			28	174	48.95	2.2		
7.2	646	192	0.87	K 57R37 KF 57R37 KA 57R37 KAF57R37	4	30	164	46.03	2.3	K 37 KF 37 KA 37 KAF37	4
8.4	558	166	1.0			24	208	58.6	0.90		
9.9	474	141	1.2			28	177	49.79	1.06		
11	424	126	1.3			31	158	44.46	1.19		
13	363	108	1.6			37	135	37.97	1.39		
15	319	95	1.8								



K

输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数		
Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole		
r/min	Nm	i	f _B	Type	p	r/min	Nm	i	f _B	Type	p		
0.55kW						0.75kW							
39	126	35.57	1.49	K 37 KF 37 KA 37 KAF37	4	1.9	3329	726	0.76	K 87R57 KF 87R57 KA 87R57 KAF87R57	4		
46	106	29.96	1.77			2.2	2926	638	0.87				
48	102	28.83	1.84			2.5	2577	562	0.98				
56	89	24.99	2.1			2.9	2174	474	1.17				
60	83	23.36	2.2			3.3	1954	426	1.30				
69	72	20.19	2.4			3.7	1711	373	1.48				
81	61	17.15	2.8			4.2	1513	330	1.68				
91	54	15.31	3.0			4.7	1344	293	1.89	K 77R37 KF 77R37 KA 77R37 KAF77R37	4		
106	46	13.08	3.3			5.6	1147	250	2.2				
114	43	12.14	3.5			5.9	1082	236	2.3				
133	37	10.49	4.0			6.9	922	201	2.8				
156	32	8.91	4.8			3.9	1642	358	0.89				
175	28	7.96	5.2			4.3	1468	320	0.99				
204	24	6.80	5.8			4.9	1298	283	1.12				
218	23	6.37	6.0			5.7	1128	246	1.29				
259	19	5.36	6.9			6.4	991	216	1.47				
0.75kW						0.75kW							
0.11	60151	13116	0.78	K 187R97 KA 187R97	4	3.9	1737	175.47	2.3	K 97 KF 97 KA 97 KAF97	8		
0.12	53414	11647	0.88			4.4	1508	152.31	2.7				
0.19	33630	7333	1.40			4.8	1389	140.28	2.9				
0.21	30901	6738	1.52			0.75kW							
0.23	27443	5984	1.71			4.6	1456	147.09	1.7	K 87 KF 87 KA 87 KAF87	8		
0.16	39426	8597	0.76	K 167R97 KA 167R97	4	5.4	1254	126.68	2.0				
0.21	29984	6538	1.00			5.9	1140	115.16	2.2				
0.26	24609	5366	1.22			6.6	1017	102.71	2.5				
0.34	18615	4059	1.62			5.2	1295	174.99	2.0	K 87 KF 87 KA 87 KAF87	6		
0.41	15405	3359	1.95	5.5	1214	164.05	2.1						
0.35	18225	3974	0.93	K 157R97 KF 157R97 KA 157R97 KAF157R97	4	6.2	1088	147.09	2.3				
0.46	13974	3047	1.21			7.2	937	126.68	2.7				
0.83	7705	1680	2.2			7.0	956	197.27	2.7	K 87 KF 87 KA 87 KAF87	4		
1.02	6260	1365	2.7			8.0	848	174.99	3.0				
0.43	14845	3237	0.82			8.5	795	164.05	3.2				
0.47	13488	2941	0.91	9.4	712	147.09	3.6						
0.55	11685	2548	1.05	K 127R77 KF 127R77 KA 127R77 KAF127R77	4	6.7	1001	135.28	1.46	K 77 KF 77 KA 77 KAF77	6		
0.72	8833	1926	1.38			7.1	951	128.52	1.53				
0.79	8058	1757	1.52			8.0	840	113.56	1.73				
0.90	7067	1541	1.73			9.4	718	97.05	2.0				
1.0	6154	1342	1.99			10	658	88.97	2.2				
1.2	5398	1177	2.3			9.0	746	154.02	1.95	K 77 KF 77 KA 77 KAF77	4		
1.4	4701	1025	2.6			10	655	135.28	2.2				
1.5	4123	899	3.0			11	623	128.52	2.3				
0.82	7746	1689	0.97			12	550	113.56	2.6				
0.91	7030	1533	1.07			14	470	97.05	3.1				
1.1	6040	1317	1.25	K 107R77 KF 107R77 KA 107R77 KAF107R77	4	11	598	123.54	1.29	K 67 KF 67 KA 67 KAF67	4		
1.2	5274	1150	1.43			13	523	108.03	1.47				
1.4	4655	1015	1.62			15	436	90.04	1.77				
1.6	3994	871	1.88			18	370	76.37	2.1				
1.8	3586	782	2.1			20	334	68.95	2.3				
2.0	3146	686	2.4			23	294	60.66	2.6	K 57 KF 57 KA 57 KAF57	4		
2.3	2779	606	2.7			24	277	57.28	2.8				
1.3	5054	1102	0.8			K 97R57 KF 97R57 KA 97R57 KAF97R57	4	11	600			123.85	0.9
1.5	4389	957	0.9					13	525			108.29	1.1
1.6	3921	855	1.0	14	498			102.88	1.1				
1.9	3407	743	1.2	15	437			90.26	1.3				
2.1	2986	651	1.4	18	371			76.56	1.5				
2.4	2628	573	1.5	20	335			69.12	1.7				
2.8	2311	504	1.7	23	295			60.81	1.9				
3.2	2004	437	2.0	24	278			57.42	2.0				
3.6	1752	382	2.3	28	237			48.89	2.4				
4.6	1399	305	2.9	31	215			44.43	2.6				
5.4	1183	258	3.4	0.75kW									
6.0	1064	232	3.8	0.75kW									
7.0	913	199	4.4	0.75kW									

输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数										
Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole										
r/min	Nm	i	f _B	Type	p	r/min	Nm	i	f _B	Type	p										
0.75kW						1.1kW															
18	364	75.2	1.03	K 47 KF 47 KA 47 KAF47	4	1.5	6047	899	2.0	K 127R77 KF 127R77 KA 127R77 KAF127R77	4										
20	338	69.84	1.11			1.8	5314	790	2.3												
22	307	63.30	1.23			2.0	4641	690	2.6												
24	275	56.83	1.37			2.3	4029	599	3.0												
28	237	48.95	1.59			2.6	3625	539	3.4												
30	223	46.03	1.69			3.0	3148	468	3.9												
35	192	39.61	1.96			K 107R77 KF 107R77 KA 107R77 KAF107R77	4														
39	171	35.39	2.2					1.2	7735			1150	1.0								
45	151	31.19	2.5					1.4	6827			1015	1.1								
1.1kW	31	215	44.46	0.87	1.6			5859	871	1.3	K 97R57 KF 97R57 KA 97R57 KAF97R57	4									
	37	184	37.97	1.02	1.8			5260	782	1.4											
	39	172	35.57	1.09	2.0			4614	686	1.6											
	46	145	29.96	1.30	2.3			4076	606	1.8											
	48	140	28.83	1.35	2.7			3464	515	2.2											
	56	121	24.99	1.55	3.1			3060	455	2.5											
	60	113	23.36	1.62	3.5	2704	402	2.8													
	69	98	20.19	1.78	4.0	2361	351	3.2													
	81	83	17.15	2.0	4.5	2065	307	3.6													
	91	74	15.31	2.2	1.9	4998	743	0.81	K 87R57 KF 87R57 KA 87R57 KAF87R57	4											
	106	63	13.08	2.4	2.1	4379	651	0.92													
	114	59	12.14	2.6	2.4	3854	573	1.05													
	133	51	10.49	3.0	2.8	3390	504	1.19													
	156	43	8.91	3.5	3.2	2939	437	1.38													
	175	39	7.96	3.8	3.6	2569	382	1.57													
	204	33	6.80	4.3	4.1	2300	342	1.76													
	218	31	6.37	4.4	K 97 KF 97 KA 97 KAF97	8															
	259	26	5.36	5.1			2.9	3188					474	0.80							
1.1kW	0.15	62528	9363	0.75			3.3	2865			426	0.89	K 87 KF 87 KA 87 KAF87	6							
	0.17	54267	8126	0.87			3.7	2509			373	1.01									
	0.19	48971	7333	0.96			4.2	2220			330	1.14									
	0.21	44998	6738	1.04			4.7	1971			293	1.29									
	0.23	39962	5984	1.18			5.6	1682			250	1.51									
	0.26	35728	5350	1.32			5.9	1587			236	1.60									
	0.29	32122	4810	1.46			6.9	1352			201	1.88									
	0.32	29144	4364	1.61			K 97 KF 97 KA 97 KAF97	8													
	0.26	35835	5366	0.84							3.9	2548			175.47	1.6					
	0.29	32042	4798	0.94					4.4	2212	152.31	1.8									
	0.34	27107	4059	1.11					4.8	2037	140.28	2.0									
	0.42	22432	3359	1.34					5.5	1810	124.61	2.2									
	0.51	18305	2741	1.64					K 97 KF 97 KA 97 KAF97	6											
	0.64	14518	2174	2.1							5.2	1904			175.47	2.1					
	0.82	11340	1698	2.7							5.9	1653			152.31	2.4					
	1.00	9363	1402	3.2							6.5	1522			140.28	2.7					
	1.08	8622	1291	3.5	7.3	1352					124.61	3.0									
	1.1kW	0.40	23480	3516	0.72	K 167R97 KA 167R97					4	K 97 KF 97 KA 97 KAF97			4						
0.46		20375	3051	0.83	8.0								1238	175.47		3.3					
0.54		17430	2610	0.97	9.1								1074	152.31		3.7					
0.60		15507	2322	1.09	10								989	140.28		4.1					
0.83		11219	1680	1.51	K 87 KF 87 KA 87 KAF87								6								
1.0		9116	1365	1.86										5.2		1899	174.99	1.34			
1.1		8207	1229	2.1										5.5		1780	164.05	1.42			
1.3		7299	1093	2.3										6.2		1596	147.09	1.59			
1.5		6291	942	2.7			7.2	1375						126.68		1.84					
1.6		5703	854	3.0			K 87 KF 87 KA 87 KAF87	4													
0.72		12955	1926	0.9										8.0		1234	174.99	2.1			
0.79		11818	1757	1.0										8.5		1157	164.05	2.2			
0.90		10365	1541	1.2										9.5		1037	147.09	2.4			
1.0		9027	1342	1.4					11	894				126.68		2.8					
1.2		7917	1177	1.5					12	812				115.16		3.1					
1.4		6894	1025	1.8					K 77 KF 77 KA 77 KAF77	6											
1.1kW		0.72	12955	1926										0.9		6.7	1468	135.28	0.99	K 77 KF 77 KA 77 KAF77	6
		0.79	11818	1757										1.0		7.1	1395	128.52	1.04		
	0.90	10365	1541	1.2		8.0					1232	113.56		1.18							
	1.0	9027	1342	1.4		9.4					1053	97.05		1.38							
	1.2	7917	1177	1.5																	
	1.4	6894	1025	1.8																	



TAIGONG
泰工减速机

K

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p
1.1kW						1.5kW					
10	954	135.28	1.53	K 77 KF 77 KA 77 KAF77	4	0.21	61360	6738	0.77	K 187R97 KA 187R97	4
11	906	128.52	1.61		4	0.23	54494	5984	0.86		4
12	801	113.56	1.82		4	0.26	48720	5350	0.96		4
14	685	97.05	2.1		4	0.29	43803	4810	1.07		4
16	628	88.97	2.3		4	0.32	39741	4364	1.18		4
18	551	78.07	2.6		4	0.39	32866	3609	1.43		4
19	522	73.99	2.8			0.46	27884	3062	1.69		
						0.56	22940	2519	2.0		
						0.62	20654	2268	2.3		
13	762	108.03	1.01	K 67 KF 67 KA 67 KAF67	4	0.34	36964	4059	0.81	K 167R97 KA 167R97	4
14	724	102.62	1.06		4	0.42	30589	3359	0.98		4
16	635	90.04	1.21		4	0.51	24961	2741	1.21		4
18	539	76.37	1.43		4	0.64	19798	2174	1.52		4
20	486	68.95	1.58		4	0.82	15463	1698	1.95		4
23	428	60.66	1.80		4	1.0	12767	1402	2.4		4
24	404	57.28	1.91		4	1.1	11757	1291	2.6		4
29	344	48.77	2.2		4						
32	313	44.32	2.5			0.6	21118	2319	0.8	K 157R97 KF 157R97 KA 157R97 KAF157R97	4
36	271	38.39	2.8			0.8	15299	1680	1.1		4
						1.0	12431	1365	1.4		4
16	637	90.26	0.89	K 57 KF 57 KA 57 KAF57	4	1.1	11192	1229	1.5		4
18	540	76.56	1.04		4	1.3	9954	1093	1.7		4
20	488	69.12	1.16		4	1.5	8578	942	2.0		4
23	429	60.81	1.31		4	1.6	7777	854	2.2		4
24	405	57.42	1.39		4	2.5	5145	565	3.3		4
29	345	48.89	1.64		4	2.8	4581	503	3.7		4
32	313	44.43	1.80		4						4
36	271	38.49	2.1		4	2.6	4881	536	2.5		4
39	252	35.70	2.2		4	3.3	3807	418	3.2		4
46	214	30.28	2.6		4	3.8	3342	367	3.7		4
51	193	27.34	2.9		4						4
58	170	24.05	3.3		4	0.80	16000	1757	0.76	K 127R77 KF 127R77 KA 127R77 KAF127R77	4
62	160	22.71	3.5		4	0.91	14033	1541	0.87		4
72	136	19.34	4.0		4	1.0	12221	1342	1.00		4
80	124	17.57	4.2		4	1.2	10718	1177	1.14		4
92	107	15.22	4.6		4	1.4	9334	1025	1.31		4
106	93	13.25	4.7		4	1.6	8187	899	1.49		4
117	84	11.92	4.9		4	1.8	7194	790	1.70		4
124	79	11.26	5.1		4	2.0	6284	690	1.94		4
146	68	9.59	5.6			2.3	5455	599	2.2	K 107R77 KF 107R77 KA 107R77 KAF107R77	4
161	61	8.71	6.0			2.6	4908	539	2.5		4
185	53	7.55	6.4			3.0	4262	468	2.9		4
213	46	6.57	7.0			3.4	3734	410	3.3		4
											4
25	401	56.83	0.94	K 47 KF 47 KA 47 KAF47	4	1.4	9243	1015	0.8		4
29	345	48.95	1.09		4	1.6	7932	871	0.9		4
30	325	46.03	1.16		4	1.8	7121	782	1.1		4
35	279	39.61	1.35		4	2.0	6247	686	1.2		4
40	250	35.39	1.51		4	2.3	5519	606	1.4		4
45	220	31.19	1.71		4	2.7	4690	515	1.6		4
48	207	29.32	1.82		4	3.1	4144	455	1.8		4
54	183	25.91	2.1			3.5	3661	402	2.1	K 97R57 KF 97R57 KA 97R57 KAF97R57	4
64	154	21.81	2.4			4.0	3196	351	2.4		4
72	138	19.58	2.7			4.6	2796	307	2.7		4
											4
47	211	29.96	0.89	K 37 KF 37 KA 37 KAF37	4	2.4	5218	573	0.8		4
56	176	24.99	1.07		4	2.8	4590	504	0.9		4
60	165	23.36	1.11		4	3.2	3980	437	1.0		4
69	142	20.19	1.22		4	3.7	3479	382	1.2		4
82	121	17.15	1.40		4	4.1	3114	342	1.3		4
91	108	15.31	1.52		4	4.6	2778	305	1.5		4
107	92	13.08	1.68		4	5.4	2350	258	1.7		4
115	86	12.14	1.76		4	6.0	2113	232	1.9		4
133	74	10.49	2.0		4	7.0	1812	199	2.2		4
157	63	8.91	2.4		4						4
176	56	7.96	2.6		4						4
206	48	6.80	2.9		4						4
220	45	6.37	3.0		4						4
261	38	5.36	3.5		4						4

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p
1.5kW						1.5kW					
4.2	3005	330	0.84	K 87R57 KF 87R57 KA 87R57 KAF87R57	4	23	585	60.81	0.96	K 57 KF 57 KA 57 KAF57	4
4.8	2668	293	0.95		4	24	552	57.42	1.02		4
5.6	2277	250	1.11		4	29	470	48.89	1.20		4
5.9	2149	236	1.18		4	32	427	44.43	1.32		4
7.0	1830	201	1.39		4	36	370	38.49	1.52		4
7.7	1667	183	1.52			39	343	35.70	1.64		4
						46	291	30.28	1.94		4
4.9	2770	141.93	2.7	K 107	8	51	263	27.34	2.1		
5.8	2334	119.58	3.2	KF 107	8	58	231	24.05	2.4		
6.2	2163	110.83	3.5	KA 107	8	62	218	22.71	2.6		
				KAF107	8	72	186	19.34	2.9		
4.5	2972	152.31	1.36	K 97	8	35	381	39.61	0.99	K 47 KF 47 KA 47 KAF47	4
4.9	2738	140.28	1.48	KF 97	8	40	340	35.39	1.10		4
5.5	2432	124.61	1.66	KA 97	8	45	300	31.19	1.25		4
				KAF97	8	48	282	29.32	1.33		4
						54	249	25.91	1.51		4
5.2	2569	175.47	1.57	K 97	6	64	210	21.81	1.79	K 37 KF 37 KA 37 KAF37	4
6.0	2229	152.31	1.81	KF 97	6	72	188	19.58	2.0		4
6.6	2053	140.28	1.97	KA 97	6	83	162	16.86	2.2		4
7.4	1824	124.61	2.2	KAF97	6	88	153	15.86	2.3		4
						103	131	13.65	2.6		4
8.0	1688	175.47	2.4	K 97	4	115	117	12.19	2.8		
9.2	1465	152.31	2.7	KF 97	4	119	113	11.77	2.3		
10	1349	140.28	3.0	KA 97	4						
11	1199	124.61	3.4	KAF97	4						
6.3	2153	147.09	1.18	K 87	6	60	225	23.36	0.82	K 37 KF 37 KA 37 KAF37	4
7.2	1854	126.68	1.37	KF 87	6	69	194	20.19	0.90		4
7.9	1686	115.16	1.50	KA 87	6	82	165	17.15	1.03		4
9.0	1503	102.71	1.69	KAF87	6	91	147	15.31	1.12		4
						107	126	13.08	1.23		4
8.0	1683	174.99	1.51	K 87 KF 87 KA 87 KAF87	4	115	117	12.14	1.29	K 37 KF 37 KA 37 KAF37	4
8.5	1578	164.05	1.61		4	133	101	10.49	1.49		4
9.5	1415	147.09	1.79		4	157	86	8.91	1.75		4
11	1218	126.68	2.1		4	176	77	7.96	1.90		4
12	1108	115.16	2.3		4	206	65	6.80	2.2		
14	988	102.71	2.6			220	61	6.37	2.2		
16	830	86.34	3.1			261	52	5.36	2.6		
8.0	1680	113.56	0.87	K 77	6	2.2kW					
9.4	1436	97.05	1.01	KF 77	6	0.33	57466	4364	0.82	K 187R97 KA 187R97	4
10	1317	88.97	1.11	KA 77	6	0.39	47524	3609	0.99		4
12	1155	78.07	1.26	KAF77	6	0.46	40321	3062	1.17		4
						0.50	37108	2818	1.27		4
10	1301	135.28	1.12	K 77 KF 77 KA 77 KAF77	4	0.56	33171	2519	1.42		4
11	1236	128.52	1.18		4	0.63	29866	2268	1.57	K 167R97 KA 167R97	4
12	1092	113.56	1.33		4	0.69	27048	2054	1.74		4
14	933	97.05	1.56		4	0.78	23979	1821	1.96		4
16	856	88.97	1.70		4	0.88	21135	1605	2.2		4
18	751	78.07	1.94			0.52	36094	2741	0.83	K 157R97 KF 157R97 KA 157R97 KAF157R97	4
19	712	73.99	2.0			0.63	29655	2252	1.01		4
22	623	64.75	2.3			0.65	28628	2174	1.05		4
24	561	58.34	2.6			0.84	22360	1698	1.35		4
27	492	51.18	3.0			1.0	18462	1402	1.63		
31	434	45.16	3.4			1.1	17000	1291	1.77		
35	385	40.04	3.8			1.3	14498	1101	2.1		
						1.5	12431	944	2.4		
16	866	90.04	0.89	K 67 KF 67 KA 67 KAF67	4	0.85	22123	1680	0.76	K 157R97 KF 157R97 KA 157R97 KAF157R97	4
18	735	76.37	1.05		4	1.0	17975	1365	0.94		4
20	663	68.95	1.16		4	1.2	16184	1229	1.05		4
23	583	60.66	1.32		4	1.3	14393	1093	1.18		4
24	551	57.28	1.40		4	1.5	12404	942	1.36		4
29	469	48.77	1.64			1.7	11246	854	1.50		
32	426	44.32	1.81			1.9	9955	756	1.70		
36	369	38.39	2.1								
39	343	35.62	2.2								
46	291	30.22	2.7								
51	262	27.28	2.9								
58	231	24.00	3.3								



输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	
Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole	
r/min	Nm	i	f _B	Type	p	r/min	Nm	i	f _B	Type	p	
2.2kW						2.2kW						
2.6	7058	536	1.73	K 127R87 KF 127R87 KA 127R87 KAF127R87	4	40	490	35.20	3.0	K 77	4	
3.0	6229	473	1.96		4	46	430	30.89	3.4	KF 77	4	
3.4	5504	418	2.2		4	49	407	29.27	3.6	KA 77	4	
3.9	4833	367	2.5		4	55	356	25.62	4.1	KAF77	4	
4.3	4346	330	2.8		4							
1.4	13497	1025	0.91	K 127R77 KF 127R77 KA 127R77 KAF127R77	4	23	844	60.66	0.91	K 67 KF 67 KA 67 KAF67	4	
1.6	11838	899	1.03		4	25	797	57.28	0.97		4	
1.8	10403	790	1.17		4	29	678	48.77	1.14		4	
2.1	9086	690	1.34		4	32	616	44.32	1.25		4	
2.4	7888	599	1.55		4	37	534	38.39	1.44		4	
2.6	7098	539	1.72		4	40	495	35.62	1.56		4	
3.0	6163	468	1.98		4	47	420	30.22	1.83		4	
3.5	5399	410	2.3		4	52	379	27.28	2.0		4	
2.3	7980	606	0.94	K 107R77 KF 107R77 KA 107R77 KAF107R77	4	59	334	24.00	2.3		4	
2.8	6782	515	1.11		4	63	315	22.66	2.3		4	
3.1	5992	455	1.26		4	74	268	19.30	2.7		4	
3.5	5294	402	1.42		4	81	244	17.54	2.9		4	
4.0	4622	351	1.63		4	93	211	15.19	3.1		4	
4.6	4043	307	1.86		4	107	184	13.22	3.4		4	
5.1	3648	277	2.1		4	116	170	12.24	2.9		4	
5.8	3200	243	2.4		4	136	145	10.42	3.2		4	
3.7	5030	382	0.80	K 97R57 KF 97R57 KA 97R57 KAF97R57	4	150	132	9.47	3.4		K 57 KF 57 KA 57 KAF57	4
4.2	4504	342	0.90		4	173	114	8.20	3.6			4
4.7	4016	305	1.01		4	199	99	7.14	4.0			4
5.5	3397	258	1.19		4	32	618	44.43	0.91	4		
6.1	3055	232	1.32		4	37	535	38.49	1.05	4		
7.1	2620	199	1.54		4	40	497	35.70	1.14	4		
5.0	3948	141.93	1.90	K 107 KF 107 KA 107 KAF107	8	47	421	30.28	1.34	4		
5.9	3326	119.58	2.3		8	52	380	27.34	1.48	4		
6.4	3083	110.83	2.4		8	59	334	24.05	1.69	4		
7.1	2763	99.34	2.7		8	63	316	22.71	1.79	4		
6.1	3200	152.31	1.26	K 97 KF 97 KA 97 KAF97	6	73	269	19.34	2.0	K 47 KF 47 KA 47 KAF47		4
6.7	2947	140.28	1.37		6	81	244	17.57	2.1			4
7.5	2618	124.61	1.54		6	93	212	15.22	2.4			4
14	1443	103.78	2.80		6	107	184	13.25	2.3		4	
8.1	2440	175.47	1.66	K 97 KF 97 KA 97 KAF97	4	119	166	11.92	2.4		4	
9.3	2118	152.31	1.91		4	126	157	11.26	2.5		4	
10	1951	140.28	2.1		4	55	360	25.91	1.04		K 37 KF 37 KA 37 KAF37	4
11	1733	124.61	2.3		4	65	303	21.81	1.24			4
14	1443	103.78	2.8		4	73	272	19.58	1.38			4
15	1346	96.80	3.0		4	84	234	16.86	1.52			4
9.7	2046	147.09	1.24	K 87 KF 87 KA 87 KAF87	4	90	221	15.86	1.62	4		
11	1762	126.68	1.44		4	104	190	13.65	1.78	4		
12	1602	115.16	1.58		4	116	170	12.19	1.94	4		
14	1428	102.71	1.78		4	121	164	11.77	1.61	4		
16	1201	86.34	2.1		4	134	147	10.56	1.79	4		
18	1103	79.34	2.3		4	156	127	9.10	2.1	4		
20	980	70.46	2.6		4	109	182	13.08	0.85	4		
23	876	63.00	2.9		4	135	146	10.49	1.03	4		
13	1579	113.56	0.9	K 77 KF 77 KA 77 KAF77	4	159	124	8.91	1.21	4		
15	1350	97.05	1.08		4	178	111	7.96	1.32	4		
16	1237	88.97	1.18		4	209	95	6.80	1.49	4		
18	1086	78.07	1.34		4	223	89	6.37	1.54	4		
19	1029	73.99	1.42		4	265	75	5.36	1.77			
22	901	64.75	1.62		4							
24	811	58.34	1.80		4							
28	712	51.18	2.0		4							
31	628	45.16	2.3		4							
35	557	40.04	2.6	4								

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p
3.0kW						3.0kW					
0.46	54983	3062	0.85	K 187R97 KA 187R97	4	10	2692	141.93	2.8	K 107	4
0.5	50602	2818	0.93			12	2268	119.58	3.3	KF 107	4
0.56	45233	2519	1.04			7.7	3496	124.61	1.16	K 97	6
0.63	40726	2268	1.15								
0.69	36883	2054	1.27								
0.78	32699	1821	1.44								
0.88	28820	1605	1.63								
1.0	25050	1395	1.88								
1.2	21476	1196	2.2								
0.84	30490	1698	0.99	K 167R97 KF 167R97 KA 167R97 KAF167R97	4	11	2363	124.61	1.71	K 97 KF 97 KA 97 KAF97	4
1.0	25175	1402	1.2			14	1968	103.78	2.05		
1.1	23182	1291	1.3			15	1836	96.80	2.20		
1.3	19770	1101	1.52			16	1646	86.52	2.46		
1.5	16951	944	1.77			18	1477	77.89	2.74		
1.7	15137	843	1.99			20	1338	70.54	3.02		
1.9	13593	757	2.2			23	1186	62.55	3.41		
						25	1072	56.55	3.77		
1.2	22069	1229	0.77	K 157R97 KF 157R97 KA 157R97 KAF157R97	4	9.6	2790	147.09	0.91	K 87 KF 87 KA 87 KAF87	4
1.3	19627	1093	0.86			11	2403	126.68	1.06		
1.5	16915	942	1.00			12	2184	115.16	1.16		
1.7	15335	854	1.10			14	1948	102.71	1.30		
1.9	13575	756	1.25			16	1637	86.34	1.55		
2.5	10146	565	1.67			18	1505	79.34	1.69		
2.8	9032	503	1.87			20	1336	70.46	1.90		
						23	1195	63.00	2.1		
2.6	9625	536	1.27	K 127R87 KF 127R87 KA 127R87 KAF127R87	4	25	1074	56.64	2.4	K 77 KF 77 KA 77 KAF77	4
3.0	8494	473	1.44			29	932	49.16	2.7		
3.4	7506	418	1.63			32	835	44.02	2.9		
3.9	6590	367	1.85			39	693	36.52	3.4		
4.3	5926	330	2.1			16	1687	88.97	0.86		
4.9	5207	290	2.3			18	1481	78.07	0.98		
						19	1403	73.99	1.04		
						22	1228	64.75	1.19		
1.8	14186	790	0.86	K 127R77 KF 127R77 KA 127R77 KAF127R77	4	24	1106	58.34	1.32	K 67 KF 67 KA 67 KAF67	4
2.1	12390	690	0.99			28	971	51.18	1.50		
2.4	10756	599	1.14			31	856	45.16	1.70		
2.6	9679	539	1.26			35	759	40.04	1.92		
3.0	8404	468	1.45			40	668	35.20	2.2		
3.5	7362	410	1.66			46	586	30.89	2.5		
						32	841	44.32	0.92		
						37	728	38.39	1.06		
3.1	8170	455	0.92	K 107R77 KF 107R77 KA 107R77 KAF107R77	4	40	676	35.62	1.14	K 57 KF 57 KA 57 KAF57	4
3.5	7219	402	1.04			47	573	30.22	1.34		
4.0	6303	351	1.19			52	517	27.28	1.49		
4.6	5513	307	1.36			59	455	24.00	1.65		
5.1	4974	277	1.51			63	430	22.66	1.71		
5.8	4363	243	1.72			74	366	19.30	1.95		
6.6	3861	215	1.95			81	333	17.54	2.1		
7.5	3394	189	2.2			93	288	15.19	2.3		
8.5	3017	168	2.5	K 97R57 KF 97R57 KA 97R57 KAF97R57	4	107	251	13.22	2.5	K 107 KF 107 KA 107 KAF107	8
9.5	2676	149	2.8			116	232	12.24	2.1		
10	2496	139	3.0			136	198	10.42	2.4		
						150	180	9.47	2.5		
5.5	4893	258	0.83			47	574	30.28	0.98		
6.1	4400	232	0.92			52	519	27.34	1.09		
7.1	3774	199	1.07			59	456	24.05	1.24		
						63	431	22.71	1.31		
5.0	5366	141.46	1.40	K 107 KF 107 KA 107 KAF107	8	73	367	19.34	1.47	K 57 KF 57 KA 57 KAF57	4
5.9	4543	119.76	1.66			81	333	17.57	1.57		
6.4	4204	110.83	1.79								
7.1	3768	99.34	2.0								
7.9	3402	89.68	2.2								
6.8	3968	141.46	1.9	K 107 KF 107 KA 107 KAF107	6					K 57 KF 57 KA 57 KAF57	4
8.0	3360	119.76	2.2								
8.7	3109	110.83	2.4								
9.7	2787	99.34	2.7								

K



K

输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数														
Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole														
r/min	Nm	i	f _B	Type	p	r/min	Nm	i	f _B	Type	p														
3.0kW						4.0kW																			
93	289	15.22	1.74	K 57 KF 57 KA 57 KAF57	4	4.0	8404	351	0.89	K 107R77 KF 107R77 KA 107R77 KAF107R77	4														
107	251	13.25	1.9			4.6	7350	307	1.02																
119	226	11.92	1.7			5.1	6632	277	1.13																
126	214	11.26	1.8			5.8	5818	243	1.29																
148	182	9.59	2.1			6.6	5148	215	1.46																
163	165	8.71	2.2			7.5	4525	189	1.66																
188	143	7.55	2.4			8.5	4022	168	1.68																
216	125	6.57	2.6			9.5	3567	149	1.9																
						11	3232	135	2.1																
73	371	19.58	1.01	K 47 KF 47 KA 47 KAF47	4	7.1	5032	199	0.80	K 97R57	4														
84	320	16.86	1.12							KF 97R57	4														
90	301	15.86	1.19							KA 97R57	4														
104	259	13.65	1.31							KAF97R57	4														
116	231	12.19	1.42			5.3	6825	134.94	1.8	K 127	8														
121	223	11.77	1.18							KF 127	8														
134	200	10.56	1.31							KA 127	8														
156	173	9.1	1.53							KAF127	8														
166	162	8.56	1.56			6.6	5464	146.07	2.2	K 127	6														
193	140	7.36	1.68							KF 127	6														
216	125	6.58	1.81							KA 127	6														
244	110	5.81	1.96							KAF127	6														
159	169	8.91	0.89	K 37 KF 37 KA 37 KAF37	4	6.4	5605	110.83	1.34	K 107	8														
178	151	7.96	0.97							KF 107	8														
209	129	6.8	1.09							KA 107	8														
223	121	6.37	1.13							KAF107	8														
265	102	5.36	1.29			8.7	4120	81.46	1.83	KAF107	8														
4.0kW						6.8	5309	141.93	1.42	K 107 KF 107 KA 107 KAF107	6														
1.7	19697	825	2.4	K 187R107	4	8.0	4473	119.58	1.68																
2.8	12272	514	3.8	KA 187R107	4	8.7	4146	110.83	1.81																
0.57	59473	2510	0.79	K 187R97 KA 187R97	4	9.7	3716	99.34	2.0																
0.63	53547	2268	0.88			11	3354	89.68	2.2																
0.70	48494	2054	0.97			10	3527	141.46	2.1	K 107 KF 107 KA 107 KAF107	4														
0.79	42993	1821	1.09									12	2986	119.76	2.5										
0.90	37894	1605	1.24									13	2764	110.83	2.7										
1.0	32936	1395	1.43									14	2477	99.34	3.0										
1.2	28237	1196	1.66									16	2236	89.68	3.4										
1.4	24696	1046	1.90									18	2031	81.46	3.7										
1.5	22240	942	2.1	20	1802							72.27	4.2												
1.0	33101	1402	0.91	K 167R97 KA 167R97	4							10	3498	140.28	1.16	K 97 KF 97 KA 97 KAF97	4								
1.1	30480	1291	0.99			12	3107	124.61	1.30																
1.3	25994	1101	1.16			14	2588	103.78	1.56																
1.5	22288	944	1.35			15	2414	96.80	1.67																
1.7	19903	843	1.51			17	2157	86.52	1.87																
1.9	17873	757	1.68			18	1942	77.89	2.1																
2.3	14874	630	2.0			20	1759	70.54	2.3																
1.7	20163	854	0.84			K 157R97 KF 157R97 KA 157R97 KAF157R97	4	13	2872	115.16	0.88							K 87 KF 87 KA 87 KAF87	4						
1.9	17849	756	0.95	14	2561							102.71	0.99												
2.5	13339	565	1.27	17	2153							86.34	1.18												
2.9	11876	503	1.42	18	1978							79.34	1.28												
3.3	10223	433	1.66	20	1757							70.46	1.44												
2.7	12655	536	0.97	K 127R87 KF 127R87 KA 127R87 KAF127R87	4	23	1571	63.00	1.62	25	1412	56.64	1.80												
3.0	11167	473	1.09											29	1226	49.16	2.1								
3.4	9869	418	1.24															33	1098	44.02	2.3				
3.9	8665	367	1.41																			39	911	36.52	2.8
4.3	7901	330	1.55																						
4.9	6943	290	1.76																						
5.6	6057	253	2.0																						
2.4	14341	599	0.85																						
2.6	12905	539	0.95	KF 127R77	4																				
3.0	11205	468	1.09	KA 127R77	4																				
3.5	9816	410	1.24	KAF127R77	4																				

输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数		
Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole		
r/min	Nm	i	f _B	Type	p	r/min	Nm	i	f _B	Type	p		
4.0kW						5.5kW							
22	1615	64.75	0.90	K 77 KF 77 KA 77 KAF77	4	3.4	13570	418	0.90	K 127R87 KF 127R87 KA 127R87 KAF127R87	4		
25	1455	58.34	1.00			3.9	11914	367	1.03				
28	1276	51.18	1.14			4.4	10713	330	1.14				
32	1126	45.16	1.29			5.0	9414	290	1.30				
36	998	40.04	1.46			5.7	8213	253	1.49				
38	957	38.39	1.52			6.7	6980	215	1.75				
41	878	35.20	1.66			7.1	6590	203	1.71	K 107R77 KF 107R77 KA 107R77 KAF107R77	4		
47	770	30.89	1.89			8.6	5454	168	2.1				
49	730	29.27	2.0			9.7	4805	148	2.3				
56	639	25.62	2.3			6.7	6980	215	1.08				
62	576	23.08	2.5			7.6	6136	189	1.23				
71	505	20.25	2.9			8.6	5454	168	1.38				
48	754	30.22	1.02	K 67 KF 67 KA 67 KAF67	4	9.7	4837	149	1.55	K 157 KF 157 KA 157 KAF157	8		
						11	4383	135	1.72				
						4.8	10288	150.03	1.64			K 127 KF 127 KA 127 KAF127	8
						5.9	8423	122.83	2.0				
						7.2	6833	99.65	2.5				
						7.8	6338	92.42	2.7				
						5.3	9253	134.94	1.3	K 107 KF 107 KA 107 KAF107	6		
						5.9	8399	122.60	1.5				
						6.5	7556	110.13	1.6				
						8.1	6143	89.43	2.0				
						7.1	6940	134.94	1.76			K 97 KF 97 KA 97 KAF97	4
						7.8	6299	122.60	1.94				
8.7	5667	110.13	2.2										
11	4599	89.43	2.7										
8.7	5700	110.83	1.32	K 87 KF 87 KA 87 KAF87	4								
9.7	5109	99.34	1.47										
11	4612	89.68	1.63										
12	4190	81.46	1.79										
10	4866	141.93	1.55			K 77 KF 77 KA 77 KAF77	4						
12	4100	119.58	1.83										
13	3800	110.83	1.98										
14	3406	99.34	2.2										
16	3075	89.68	2.4										
18	2793	81.46	2.7										
0.79	59116	1821	0.80	K 187R97 KA 187R97	4	12	4273	124.61	0.95	K 77 KF 77 KA 77 KAF77	4		
						14	3558	103.78	1.14				
						15	3319	96.80	1.22				
						17	2967	86.52	1.36				
						18	2671	77.89	1.51				
						20	2419	70.54	1.67				
						23	2145	62.55	1.88				
						25	1939	56.55	2.1				
						30	1643	47.93	2.5				
						17	2960	86.34	1.37			K 167R97 KA 167R97	4
						18	2720	79.34	1.49				
						20	2416	70.46	1.67				
23	2160	63.00	1.87										
25	1942	56.64	2.1										
29	1686	49.16	1.51										
33	1509	44.02	1.68										
39	1252	36.52	2.0										
46	1076	31.39	2.4										
52	956	27.88	2.7										
32	1548	45.16	0.94	K 157R97 KF 157R97 KA 157R97 KAF157R97	4								
36	1373	40.04	1.06										
47	1059	30.89	1.38										
49	1004	29.27	1.45										
56	878	25.62	1.66										



K

输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	
Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole	
r/min	Nm	i	f _B	Type	p	r/min	Nm	i	f _B	Type	p	
5.5kW						7.5kW						
62	791	23.08	1.84	K 77 KF 77 KA 77 KAF77	4	6.4	10522	150.03	1.6	K 157 KF 157 KA 157 KAF157	6	
71	694	20.25	2.0			7.8	8614	122.83	2.0			
81	613	17.87	2.2			9.6	6989	99.65	2.4			
91	543	15.84	2.4			10	6482	92.42	2.6			
107	464	13.52	2.5			12	5593	79.75	3.0			
117	424	12.36	2.6			7.1	9464	134.94	1.29	K 127	6	
133	371	10.81	2.7			7.8	8590	122.48	1.42	KF 127	6	
60	823	24.00	0.91	K 67 KF 67 KA 67 KAF67	4	8.7	7727	110.18	1.58	KA 127	6	
	64	777	22.66			0.94	11	6272	89.43	1.95	KAF127	6
	75	662	19.30			1.08	10	6736	146.07	1.81	K 127 KF 127 KA 127 KAF127	4
	82	601	17.54			1.16	11	6223	134.94	1.96		
	95	521	15.19			1.26	12	5648	122.60	2.2		
	109	453	13.22			1.39	13	5081	110.13	2.4		
	118	420	12.24			1.39	16	4124	89.43	3.0		
	138	357	10.42			1.32	18	3805	82.52	3.2		
	152	325	9.47			1.39	21	3272	70.95	3.7		
	176	281	8.20			1.47	10	6545	141.93	1.15	K 107 KF 107 KA 107 KAF107	4
202	245	7.14	1.61	12	5514	119.58	1.36					
82	602	17.57	0.87	K 57 KF 57 KA 57 KAF57	4	13	5111	110.83	1.47			
	95	522	15.22			0.96	15	4581	99.34	1.64		
	109	454	13.25			0.97	16	4136	89.68	1.82		
	121	409	11.92			1.01	18	3757	81.46	2.00		
	128	386	11.26			1.06	20	3333	72.27	2.3		
	150	329	9.59			1.16	22	3024	65.58	2.5		
	165	299	8.71			1.23	26	2599	56.37	2.9		
	191	259	7.55			1.33	30	2269	49.20	3.2		
	219	225	6.57			1.44	35	1925	41.74	3.6		
7.5kW	36021 31437 26808	825 720 614	1.30 1.50 1.75	K 187R107 KA 187R107	4	40	1682	36.48	4.0	K 97 KF 97 KA 97 KAF97		
						15	4464	96.80	0.91			
						17	3990	86.52	1.01			
						19	3592	77.89	1.13			
						21	3253	70.54	1.24			
						23	2884	62.55	1.40			
						26	2608	56.55	1.55			
						30	2210	47.93	1.83			
						35	1931	41.87	2.1			
						38	1766	38.30	2.3			
43	1579	34.23	2.6	K 87 KF 87 KA 87 KAF87	4							
23	2905	63.00	0.87									
26	2612	56.64	0.97									
30	2267	49.16	1.12									
33	2030	44.02	1.20									
40	1684	36.52	1.40									
47	1448	31.39	1.75									
52	1286	27.88	1.90									
59	1149	24.92	2.0									
65	1033	22.41	2.1									
75	897	19.45	2.4									
84	803	17.42	2.6									
92	736	15.95	2.3									
101	666	14.45	3.0	K 77 KF 77 KA 77 KAF77	4							
47	1424	30.89	1.02									
50	1350	29.27	1.08									
57	1181	25.62	1.23									
63	1064	23.08	1.37									
72	934	20.25	1.56									
82	824	17.87	1.65									
92	730	15.84	1.80									
108	623	13.52	1.82									
118	570	12.36	1.89									
135	499	10.81	1.95									
153	440	9.54	2.0									
173	390	8.46	2.1									
202	333	7.22	2.3									



输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数		
Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole		
r/min	Nm	i	f _B	Type	p	r/min	Nm	i	f _B	Type	p		
11kW						11kW							
1.8	52831	825	0.89	K 187R107 KA 187R107	4	20	4888	72.27	1.54	K 107 KF 107 KA 107 KAF107	4		
2.0	46107	720	1.02			22	4435	65.58	1.70				
2.4	39319	614	1.20			26	3813	56.37	1.97				
2.8	32915	514	1.43			30	3328	49.2	2.2				
3.3	28753	449	1.63			35	2823	41.74	2.5				
4.0	23374	365	2.0			40	2467	36.48	2.7				
2.0	47196	737	1.00	K 187R97 KA 187R97	4	21	4771	70.54	0.85	K 97 KF 97 KA 97 KAF97	4		
2.4	39639	619	1.19			23	4231	62.55	0.96				
2.8	33556	524	1.40			26	3825	56.55	1.06				
4.7	20044	313	1.50	30	3242	47.93	1.25						
5.3	17482	273	1.72	K 167R107 KA 167R107	4	35	2832	41.87	1.43				
5.8	16009	250	1.88			38	2590	38.3	1.56				
6.7	13960	218	2.2			43	2315	34.23	1.75				
7.2	13000	203	2.3			47	2085	30.82	1.94				
						52	1888	27.91	2.1				
2.6	35925	561	0.84	K 167R97 KA 167R97	4	59	1674	24.75	2.4	K 87 KF 87 KA 87 KAF87	4		
3.0	30674	479	0.98			65	1513	22.37	2.7				
3.5	27024	422	1.11			33	2977	44.02	0.82				
4.0	23502	367	1.28			40	2470	36.52	0.95				
4.4	21260	332	0.80	K 157R97 KF 157R97 KA 157R97 KAF157R97	4	47	2123	31.39	1.20				
5.0	18571	290	0.91			52	1886	27.88	1.30				
						59	1685	24.92	1.39				
6.8	13768	215	0.89	K 127R87 KF 127R87 KA 127R87 KAF127R87	4	65	1516	22.41	1.43			K 87 KF 87 KA 87 KAF87	4
7.2	13000	203	0.94			75	1315	19.45	1.64				
8.7	10758	168	1.14			84	1178	17.42	1.76				
9.9	9478	148	1.29			92	1079	15.95	1.57				
5.4	18313	135.38	1.64	K 167 KA 167	8	101	977	14.45	1.9				
6.6	14932	110.38	2.0			116	849	12.56	2.0				
5.9	16740	164.44	1.80	K 167 KA 167	6	131	753	11.13	2.1			K 77 KF 77 KA 77 KAF77	4
7.2	13782	135.38	2.2			147	674	9.96	2.2				
8.9	11122	164.44	2.7	177	559	8.27	2.4						
11	9158	135.38	3.3	203	486	7.19	2.5						
5.9	16615	122.83	1.02	K 157 KF 157 KA 157 KAF157	8	63	1561	23.08	0.93				
7.3	13480	99.65	1.26			72	1370	20.25	1.03				
7.9	12502	92.42	1.35			82	1209	17.87	1.13				
9.1	10788	79.75	1.57			92	1071	15.84	1.23				
6.5	15273	150.03	1.11	K 157 KF 157 KA 157 KAF157	6	108	914	13.52	1.38	K 77 KF 77 KA 77 KAF77	4		
7.9	12504	122.83	1.35			118	836	12.36	1.12				
9.7	10144	99.65	1.67			135	731	10.81	1.27				
10	9408	92.42	1.80			153	645	9.54	1.37				
12	8119	79.75	2.1	173	572	8.46	1.46	K 187R107 KA 187R107	4				
9.7	10147	150.03	1.67	202	488	7.22	1.57						
12	8308	122.83	2.0	15kW									
15	6740	99.65	2.5	2.4	53617	614	0.88			K 187R107 KA 187R107	4		
16	6251	92.42	2.7	2.8	44884	514	1.05						
				3.3	39208	449	1.20						
				4.0	31873	365	1.47						
				5.4	23403	268	2.0						
11	9127	134.94	1.34	K 157 KF 157 KA 157 KAF157	4	4.7	27332			313	1.10	K 167R107 KA 167R107	4
12	8295	122.60	1.47			5.3	23839			273	1.26		
13	7449	110.13	1.64			5.8	21831			250	1.38		
16	6049	89.43	2.0			6.7	19037			218	1.58		
18	5581	82.52	2.2			7.2	17727			203	1.70		
21	4799	70.95	2.5			7.9	16155			185	1.86		
13	7496	110.83	1.00	K 107 KF 107 KA 107 KAF107	4	9.0	14234	163	2.1	K 157R107 KF 157R107 KA 157R107 KAF157R107	4		
15	6719	99.34	1.12			6.2	20696	237	0.82				
16	6066	89.68	1.24			7.0	18338	210	0.92				
18	5510	81.46	1.36			7.9	16068	184	1.05				
						9.4	13535	155	1.25				
						12	11003	126	1.54				
						13	9606	110	1.76				



K

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p
15kW						18kW					
5.4	25096	180.78	1.87	K 187	6	2.9	54981	514	0.85	K 187R107 KA 187R107	4
6.0	22285	160.53	2.1	KA 187	6	3.3	48028	449	0.98		
7.2	18793	135.38	1.60	K 167	6	4.0	39043	365	1.20		
8.8	15324	110.39	1.96	KA 167	6	5.5	28667	268	1.64		
						6.5	24281	227	1.9		
8.9	15166	164.44	1.12	K 167	4	4.7	33481	313	0.90	K 167R107 KA 167R107	4
11	12486	135.38	1.36	KA 167	4	5.4	29202	273	1.03		
7.9	16990	122.39	1.00	K 157	6	5.9	26742	250	1.12		
9.7	13833	99.65	1.22	KF 157	6	6.7	23319	218	1.29		
10	12830	92.42	1.32	KA 157	6	7.2	21714	203	1.39		
12	11071	79.75	1.53	KA 157	6	7.9	19789	185	1.52		
14	9770	70.35	1.73	KAF157	6	9.0	17436	163	1.73		
						11	14868	139	2.0		
						12	12943	121	2.3		
9.7	13837	150.03	1.22	K 157	4	8.0	19682	184	0.86	K 157R107	4
12	11329	122.83	1.49	KF 157	4	9.5	16580	155	1.02	KF 157R107	4
15	9191	99.65	1.84	KA 157	4	12	13478	126	1.26	KA 157R107	4
16	8524	92.42	2.0	KAF157	4	13	11766	110	1.44	KAF157R107	4
18	7355	79.75	2.3								
11	12445	134.94	0.97	K 127 KF 127 KA 127 KAF127	4	5.4	30951	180.78	1.52	K 187 KA 187	6
12	11307	122.60	1.08			6.0	27484	160.53	1.71		
13	10157	110.13	1.20			6.7	24745	144.53	1.9		
16	8248	89.43	1.48			7.4	22317	130.35	2.1		
18	7611	82.52	1.61			8.1	20424	180.78	2.3	K 187 KA 187	4
21	6544	70.95	1.87			9.2	18136	160.53	2.6		
23	5774	62.60	2.1			10	16328	144.53	2.9		
27	4987	54.07	2.5			11	14726	130.35	3.2		
31	4410	47.82	2.8								
16	8271	89.68	0.91	K 107 KF 107 KA 107 KAF107	4	11	15195	134.5	1.98	K 167 KA 167	4
18	7513	81.46	1.00			13	12471	110.39	2.4		
20	6665	72.27	1.13			17	9851	87.20	3.1		
22	6048	65.58	1.24			10	17061	99.65	0.99	K 157 KF 157 KA 157 KAF157	6
26	5199	56.37	1.45			11	15823	92.42	1.08		
30	4538	49.2	1.62			12	13654	79.75	1.24		
35	3850	41.74	1.80			14	12050	70.38	1.4		
40	3365	36.48	2.0			12	13827	122.39	1.22	K 157 KF 157 KA 157 KAF157	4
45	2972	32.22	2.2			15	11258	99.65	1.50		
47	2844	30.84	2.3			16	10441	92.42	1.62		
51	2637	28.59	2.6			18	9010	79.75	1.88		
30	4421	47.93	0.91	K 97 KF 97 KA 97 KAF97	4	21	7951	70.38	2.1		
35	3862	41.87	1.05			24	6894	61.02	2.5		
38	3532	38.3	1.14			27	6133	54.29	2.8		
43	3157	34.23	1.28			31	5286	46.79	3.2		
47	2843	30.82	1.42			39	4295	38.02	3.9		
52	2574	27.91	1.57			13	12442	110.13	0.98	K 127 KF 127 KA 127 KAF127	4
59	2283	24.75	1.77			16	10103	89.43	1.21		
65	2063	22.37	1.96			18	9323	82.52	1.31		
77	1749	18.96	2.3			21	8016	70.95	1.52		
88	1527	16.56	2.6			23	7072	62.60	1.73		
47	2895	31.39	0.88	K 87 KF 87 KA 87 KAF87	4	27	6109	54.07	2.0		
52	2571	27.88	0.99			31	5403	47.82	2.3		
59	2298	24.92	1.10			37	4540	40.19	2.7		
65	2067	22.41	1.23			41	4121	36.48	3.0		
75	1794	19.45	1.37			47	3544	31.36	3.4		
84	1607	17.42	1.41			53	3127	27.67	3.9		
92	1471	15.95	1.48			20	8165	72.27	0.92	K 107 KF 107 KA 107 KAF107	4
101	1333	14.45	1.5			22	7409	65.58	1.01		
116	1158	12.56	1.53			26	6368	56.37	1.18		
131	1027	11.13	1.58			30	5558	49.2	1.35		
147	919	9.96	1.73			35	4716	41.74	1.47		
177	763	8.27	1.84			40	4121	36.48	1.64		
203	663	7.19	2.2								

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p
18.5kW						22kW					
46	3640	32.22	1.86	K 107 KF 107 KA 107 KAF107	4	9.7	20289	99.65	0.83	K 157	6
48	3484	30.84	1.88			11	18817	92.42	0.90	KF 157	6
51	3230	28.59	2.1			12	16237	79.75	1.04	KA 157	6
57	2931	25.94	2.3			14	14330	70.38	1.18	KAF157	6
66	2519	22.30	2.7			16	12424	61.02	1.36		
76	2199	19.46	3.1			12	16502	122.83	1.03		
89	1865	16.51	3.6			15	13388	99.65	1.26		
						16	12417	92.42	1.36	K 157	4
35	4730	41.87	0.85			18	10714	79.75	1.58	KF 157	4
48	3482	30.82	1.16	K 97	4	21	9456	70.38	1.79	KA 157	4
53	3153	27.91	1.28	KF 97	4	24	8198	61.02	2.1	KAF157	4
59	2796	24.75	1.45	KA 97	4	27	7294	54.29	2.3		
66	2527	22.37	1.60	KAF97	4	31	6286	46.79	2.7		
78	2142	18.96	1.9			39	5108	38.02	3.3		
89	1871	16.56	2.2								
106	1565	13.85	2.6			16	12015	89.43	1.02		
123	1355	11.99	2.7			18	11087	82.52	1.10		
						21	9532	70.95	1.28		
59	2815	24.92	0.83			23	8410	62.60	1.45	K 127	4
66	2532	22.41	0.85			27	7264	54.07	1.68	KF 127	4
76	2197	19.45	0.98	K 87	4	31	6425	47.82	1.90	KA 127	4
84	1968	17.42	1.05	KF 87	4	37	5400	40.19	2.3	KAF127	4
102	1633	14.45	1.12	KA 87	4	40	4901	36.48	2.5		
117	1419	12.56	1.21	KAF87	4	47	4215	31.36	2.9		
132	1257	11.13	1.25			53	3719	27.67	3.3		
148	1125	9.96	1.32			61	3212	23.90	3.8		
178	934	8.27	1.41			70	2841	21.14	4.3		
204	812	7.19	1.50								
22kW						22kW					
3.3	57114	449	0.82	K 187R107 KA 187R107	4	26	7573	56.37	0.99		
4.0	46429	365	1.01			30	6610	49.20	1.11		
5.5	34091	268	1.38			35	5608	41.74	1.23		
6.5	28875	227	1.63			40	4901	36.48	1.38		
7.4	25313	199	1.86			46	4329	32.22	1.56		
8.8	21370	168	2.2			48	4143	30.84	1.54	K 107	4
						51	3841	28.59	1.76	KF 107	4
5.4	34727	273	0.87			57	3485	25.94	1.94	KA 107	4
5.9	31801	250	0.95			66	2996	22.30	2.2	KAF107	4
6.7	27730	218	1.08	K 167R107	4	76	2614	19.46	2.3		
7.2	25822	203	1.16	KA 167R107	4	89	2218	16.51	2.6		
7.9	23533	185	1.28			102	1939	14.43	2.6		
9.0	20734	163	1.45			109	1815	13.51	2.9		
11	17681	139	1.70			125	1584	11.79	3.0		
12	15392	121	2.0			147	1343	10	3.3		
9.5	19717	155	0.86	K 157R107	4	48	4141	30.82	0.98		
12	16028	126	1.06	KF 157R107	4	53	3750	27.91	1.08		
13	13992	110	1.21	KA 157R107	4	59	3325	24.75	1.22		
				KAF157R107	4	66	3005	22.37	1.34	K 97	4
						78	2547	18.96	1.59	KF 97	4
5.4	36807	180.78	1.28			89	2225	16.56	1.82	KA 97	4
6.0	32684	160.53	1.44			106	1861	13.85	1.87	KAF97	4
6.7	29427	144.53	1.60	K 187	6	123	1611	11.99	2.1		
7.4	26540	130.35	1.77	KA 187	6	137	1439	10.71	2.2		
8.6	23044	113.18	2.0			164	1202	8.95	2.3		
8.1	24288	180.78	1.94			76	2613	19.45	0.83		
9.2	21567	160.53	2.2	K 187	4	84	2340	17.42	0.88	K 87	4
10	19418	144.53	2.4	KA 187	4	102	1941	14.45	0.94	KF 87	4
11	17512	130.35	2.7			117	1687	12.56	1.02	KA 87	4
						132	1495	11.13	1.05	KAF87	4
						148	1338	9.96	1.11		
11	18070	134.5	1.66			178	1111	8.27	1.18		
13	14831	110.39	2.0	K 167	4	204	966	7.19	1.27		
17	11715	87.20	2.6	KA 167	4						
19	10460	77.86	2.9								

K



K

输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p	输出转速 Output speed r/min	输出扭矩 Output torque Nm	传动比 Ratio i	使用系数 Service factor f _B	机 型 号 Type Type	极 数 Pole p
30kW						37kW					
5.5	49099	268	0.96	K 187R107 KA 187R107	4	5.5	56947	268	0.83	K 187R107 KA 187R107	4
6.5	41587	227	1.13		4	6.5	48235	227	0.97		4
7.4	36458	199	1.29		4	7.4	42285	199	1.11		4
8.8	30778	168	1.5		4	8.8	35698	168	1.32		4
6.7	39938	218	0.75	K 167R107 KA 167R107	4	8.0	39310	185	0.77	K 167R107 KA 167R107	4
7.2	37190	203	0.81		4	9.1	34635	163	0.87		4
7.9	33893	185	0.89		4	11	29536	139	1.02		4
9.0	29862	163	1.01		4	12	25711	121	1.17		4
11	25465	139	1.18		4	8.2	40572	180.78	1.16	K 187 KA 187	4
12	22168	121	1.36		4	8.9	37268	166.06	1.26		4
8.1	33120	180.78	1.42	K 187 KA 187	4	10	32436	144.53	1.45		4
8.9	30423	166.06	1.54		4	11	29395	130.98	1.60		4
10	26478	144.53	1.78		4	13	25400	113.18	1.85		4
11	23996	130.98	1.96		4	14	23046	102.69	2.0		4
13	20735	113.18	2.3		4	17	19853	88.46	2.4		4
14	18813	102.69	2.5		4	14	24559	109.43	1.22	K 167 KA 167	4
17	16206	88.46	2.9		4	17	19646	87.54	1.53		4
13	20048	109.43	1.50	K 167 KA 167	4	19	17828	78.44	1.69		4
17	15975	87.20	1.88		4	22	15301	68.18	2.0		4
19	14554	79.44	2.1		4	24	13582	60.52	2.2		4
22	12427	67.83	2.4		4	35	9592	42.74	3.1		4
24	11088	60.52	2.7	K 157 KF 157 KA 157 KAF157	4	16	20741	92.42	0.82	K 157 KF 157 KA 157 KAF157	4
15	18256	99.65	0.93		4	19	17898	79.75	0.95		4
16	16932	92.42	1.00		4	21	15795	70.38	1.07		4
18	14611	79.75	1.16		4	24	13694	61.02	1.24		4
21	12894	70.38	1.31		4	27	12184	54.29	1.39		4
24	11179	61.02	1.51		4	32	10501	46.79	1.61		4
27	9946	54.29	1.70		4	39	8533	38.02	1.98	K 127 KF 127 KA 127 KAF127	4
31	8572	46.79	1.97		4	47	7025	31.30	2.4		4
39	6965	38.02	2.4	K 127 KF 127 KA 127 KAF127	4	24	14049	62.60	0.87		4
47	5734	31.30	3.0		4	27	12135	54.07	1.01		4
21	12998	70.95	0.94		4	31	10732	47.82	1.14		4
23	11469	62.60	1.07		4	37	9020	40.19	1.35		4
27	9906	54.07	1.23		4	41	8187	36.48	1.49		4
31	8761	47.82	1.39		4	47	7040	31.36	1.74		4
37	7363	40.19	1.66		4	53	6212	27.67	1.97		4
40	6683	36.48	1.83		4	62	5366	23.90	2.3		4
47	5747	31.36	2.1	K 107 KF 107 KA 107 KAF107	4	70	4747	21.14	2.6		4
53	5071	27.67	2.4		4	83	3988	17.77	2.8		4
61	4380	23.90	2.8		4	103	3220	14.35	3.1		4
35	7647	41.74	0.90		4	116	2870	12.78	3.1		4
40	6683	36.48	1.01		4	138	2410	10.74	3.5		4
46	5903	32.22	1.08		4	171	1948	8.68	3.5		4
51	5238	28.59	1.29		4	41	8187	36.48	0.83	K 107 KF 107 KA 107 KAF107	4
57	4752	25.94	1.42		4	48	6921	30.84	0.92		4
66	4085	22.30	1.63		4	52	6416	28.59	1.05		4
76	3565	19.46	1.66		4	57	5822	25.94	1.16		4
89	3025	16.51	1.87		4	66	5005	22.3	1.33		4
102	2644	14.43	1.90		4	76	4367	19.46	1.35		4
109	2475	13.51	2.15		4	90	3705	16.51	1.53		4
125	2160	11.79	2.19		4	103	3238	14.43	1.55		4
147	1832	10.00	2.39	K 97 KF 97 KA 97 KAF97	4	110	3032	13.51	1.75		4
168	1601	8.74	2.45		4	126	2646	11.79	1.79		4
59	4534	24.75	0.89		4	148	2244	10.00	1.82		4
66	4098	22.37	0.99		4	169	1961	8.74	1.95		4
78	3474	18.96	1.16		4						
89	3034	16.56	1.33		4						
106	2537	13.85	1.59		4						
123	2197	11.99	1.66		4						
137	1962	10.71	1.37		4						
164	1640	8.95	1.52		4						

输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数								
Output speed	Output torque	Ratio	Service factor	Type	Pole	Output speed	Output torque	Ratio	Service factor	Type	Pole								
r/min	Nm	i	f _B	Type	p	r/min	Nm	i	f _B	Type	p								
45kW						55kW													
6.5	58664	227	0.80	K 187R107 KA 187R107	4	17	29204	87.54	1.03	K 167 KA 167	4								
7.4	51428	199	0.91			19	25974	77.86	1.16										
8.8	43416	168	1.08			22	22745	68.18	1.32										
11	35922	139	0.84	K 167R107	4	24	20263	60.74	1.48			KA 167	4						
	12	31270	121	0.96	KA 167R107	4	29	17207	51.58					1.75					
8.2 8.9 10 11 13 14 17 20	49344 45326 39449 35751 30892 28029 24145 20291	180.78 166.06 144.53 130.98 113.18 102.69 88.46 74.34	0.95 1.04 1.19 1.31 1.52 1.68 1.9 2.3	K 187 KA 187	4	35	14258	42.74	2.1	K 157 KF 157 KA 157 KAF157	4								
						41	12170	36.48	2.5										
						24	20357	61.02	0.83			K 127 KF 127 KA 127 KAF127	4						
						27	18111	54.29	0.93										
						32	15609	46.79	1.08										
						39	12684	38.02	1.33										
						47	10442	31.30	1.62										
						54	9214	27.62	1.84										
62	7990	23.95	2.1																
14 17 19 22 24 29 35	29869 23894 21683 18610 16519 14079 11666	109.43 87.54 79.44 68.18 60.52 51.58 42.74	1.01 1.26 1.42 1.62 1.82 2.1 2.6	K 167 KA 167	4	69	7109	21.31	2.4	K 127 KF 127 KA 127 KAF127	4								
						81	6128	18.37	2.8										
						99	4977	14.92	3.4										
						117	4220	12.65	3.8										
						37	13408	40.19	0.91			K 157 KF 157 KA 157 KAF157	4						
						47	10465	31.36	1.17										
						53	9234	27.67	1.32										
62	7976	23.90	1.53																
70	7056	21.14	1.73																
83	5928	17.77	2.06																
103	4787	14.35	2.38																
21 24 27 32 39 47 54 62 69 81	19210 16655 14818 12771 10378 8543 7539 6537 5817 5014	70.38 61.02 54.29 46.79 38.02 31.30 27.62 23.95 21.31 18.37	0.88 1.02 1.14 1.32 1.63 2.0 2.2 2.6 2.9 3.4	K 157 KF 157 KA 157 KAF157	4	116	4267	12.78	1.88	K 127 KF 127 KA 127 KAF127	4								
						138	3583	10.74	2.1										
						171	2896	8.68	2.3										
						75kW						11	59298	130.35	0.79	K 187 KA 187	4		
						13	52224	114.80	0.90										
						14	47016	103.35	1.00										
						17	40242	88.46	1.17										
						20	33818	74.34	1.39										
						23 28 32	29283 24402 20803	64.37 53.64 45.73	1.61 1.9 2.3			K 167 KA 167	4	23	29283	64.37	1.61	K 157 KF 157 KA 157 KAF157	4
28	24402	53.64	1.9																
32	20803	45.73	2.3																
19	35420	77.86	0.85	K 107 KF 107 KA 107 KAF107	4														
22	30857	67.83	0.97																
24	27531	60.52	1.09																
29	23496	51.65	1.28																
34	19598	43.08	1.53																
41	16595	36.48	1.81																
46	14616	32.13	2.1																
52 57 66 76 90 103 110 126 148 169	7804 7080 6087 5312 4506 3939 3688 3218 2729 2386	28.59 25.94 22.30 19.46 16.51 14.43 13.51 11.79 10.00 8.74	0.87 0.96 1.10 1.11 1.26 1.44 1.47 1.55 1.60 1.64			K 107 KF 107 KA 107 KAF107	4	52	13042	28.67	2.3	K 127 KF 127 KA 127 KAF127	4						
				61	11114			24.43	2.7										
				39	17296			38.02	0.98	K 157 KF 157 KA 157 KAF157	4								
				47	14239			31.30	1.19										
				54	12565			27.62	1.35										
				62	10895			23.95	1.55										
				69	9694			21.31	1.75										
				81	8357			18.37	2.0										
99	6787	14.92	2.5																
47 53 62 70 83 103 114 138 171	14271 12592 10877 9621 8084 6528 5900 4886 3949	31.36 27.67 23.90 21.14 17.77 14.35 12.78 10.74 8.68	0.86 0.97 1.12 1.27 1.36 1.51 1.54 1.72 1.74	K 127 KF 127 KA 127 KAF127	4	117	5755	12.65	2.9										
						47	14271	31.36	0.86	K 187 KA 187	4								
						53	12592	27.67	0.97										
						62	10877	23.90	1.12										
						70	9621	21.14	1.27										
						83	8084	17.77	1.36										
						103	6528	14.35	1.51										
						114	5900	12.78	1.54										

K

Mamax Permissible torque Nm	输出转速 Output speed r/min	传动比 Ratio i	机 型 号 Type Type	功率 Power kW/4p	Mamax Permissible torque Nm	输出转速 Output speed r/min	传动比 Ratio i	机 型 号 Type Type	功率 Power kW/4p	
200	5.0	279	K 37R17 KF 37R17 KA 37R17 KAF37R17	0.18	1550	1.0	1388	K 77R37 KF 77R37 KA 77R37 KAF77R37	0.25	
	5.2	267				1.1	1218			
	5.9	234				1.3	1053			
	6.8	205				1.5	924			
	7.7	181		0.25		1.7	815		0.37	
	8.7	160				2.0	709			
	10	136				2.2	622			
	11	127				2.5	552			
	13	110		0.37		2.9	485			0.55
	14	96				3.2	428			
400	2.5	552	K 47R37 KF 47R37 KA 47R37 KAF47R37	0.18		3.9	358		0.75	
	2.8	495				4.3	320			1.1
	3.3	416				4.9	283			
	3.7	375				5.7	246			
	4.3	326		0.25		0.34	4037	0.18		
	4.8	289				0.39	3609			
	5.6	250				0.45	3107			
	6.3	219		0.37		0.51	2728		0.25	
	7.2	193				0.59	2371			
	8.3	167				0.67	2088			
9.3	149	0.55		0.75	1854	0.37				
11	128			0.84	1658					
600	1.5			906	K 57R37 KF 57R37 KA 57R37 KAF57R37		0.18	0.98	1415	K 87R57 KF 87R57 KA 87R57 KAF87R57
	1.7	806	1.1	1229						
	2.0	699	1.3	1078						
	2.3	615	1.5	951						
	2.6	544	0.25			1.7	837	0.75		
	2.9	473				1.9	726			
	3.3	421				2.2	638			
	3.8	362				2.5	562		1.1	
	4.4	319	3.0	474						
	5.1	273	3.3	426		1.5				
5.8	240	3.8	373							
6.5	215	0.55		4.2	330		2.2			
7.2	192			4.8	293					
8.4	166			5.6	250					
9.9	141	0.75		5.9	236	0.18				
11	126			7.0	201					
13	108			4300	0.23		6027	K 97R57 KF 97R57 KA 97R57 KAF97R57	0.25	
15	95	0.26	5392							
820	1.2	1171	0.30		4669		0.37			
	1.3	1034	0.34		4082					
	1.5	903	0.39		3583					
	1.8	793	0.45		3108					
	2.0	697	0.25		0.51	2757				
	2.3	613			0.58	2419				
	2.6	542			0.66	2123				
	3.0	471	0.37		0.75	1856	K 97R57 KF 97R57 KA 97R57 KAF97R57	0.55		
	3.3	420			0.86	1625				
	3.9	361			0.98	1430				
4.3	323	0.55		1.1	1261	0.75				
5.1	272			1.3	1102					
5.8	240			1.5	957					
6.4	217	0.75		1.6	855		1.1			
7.3	191			1.9	743					
1550	0.59			2370	K 77R37 KF 77R37 KA 77R37 KAF77R37	0.18		2.1	651	1.5
	0.68	2050	2.4	573						
	0.78	1772	2.8	504						
	0.92	1514	3.2	437						
			3.6	382				2.2		
		4.1	342							

表上所配功率均有超载,按实际条件确定的转扭不得大于减速机额定转扭。

The power are all overload in the table. The decided torque according to operating condition should not more than gear unit's nominal torque.

K

Mamax Permissible torque Nm	输出转速 Output speed r/min	传动比 Ratio i	机 型 号 Type Type	功率 Power kW/4p	Mamax Permissible torque Nm	输出转速 Output speed r/min	传动比 Ratio i	机 型 号 Type Type	功率 Power kW/4p	
4300	4.6	305	K 97R57	3.0	13000	1.5	899	K 127R77	3.0	
	5.4	258	KF 97R57			1.8	790			
	6.0	232	KA 97R57	2.0		690				
	7.1	199	KAF97R57	2.3		599	KAF127R77		4.0	
8000	0.18	K 107R77	1.1	2.6		539				
				3.0		468				
				3.4		410				
				2.6		536	K 127R87	4.0		
				2.9		473				
				3.3		418		KF 127R87	5.5	
				3.8		367		KA 127R87		
				4.2		330	KAF127R87	7.5		
				4.8		290				
				0.55		K 107R77		1.5	0.08	17679
									0.09	15729
							0.10		14721	
							0.11		13097	
							0.12		11368	
							0.14		10114	
							0.16		8718	
	0.18	7734								
	0.27	5074								
	0.31	4514								
	0.35	3974								
	0.40	3516								
	0.46	3047	K 157R97				1.1			
	0.48	2899								
	0.60	2319					KF 157R97		1.5	
	0.69	2026					KA 157R97			
	0.77	1802	KAF157R97	2.2						
	0.83	1680								
	1.0	1365								
	1.1	1229								
	1.3	1093								
	18000	K 107R77	2.2	1.5	942					
				1.6	854					
1.8				756						
2.1				661						
2.5				565						
2.9				503						
3.3				433						
5.0				290						
4.8				307	K 157R107	11				
5.6				260						
6.2				237		KF 157R107	15			
7.0				210		KA 157R107				
32000				K 127R77	0.75	0.07	19653			
						0.08	17345			
						0.09	14945			
						0.11	13190			
	0.12	11532								
	0.14	10227								
	0.16	8597	K 167R97			0.55				
	0.21	6538								
	0.26	5366				KA 167R97	0.75			
	0.29	4798								
	0.34	4059								

本厂所配减速机为初选，表中各点为减速机额定功率，实际功率应小于表中功率。 The power are all overload in the table. The decided torque according

Mamax Permissible torque Nm	输出转速 Output speed r/min	传动比 Ratio i	机 型 号 Type Type	功率 Power kW/4p	Mamax Permissible torque Nm	输出转速 Output speed r/min	传动比 Ratio i	机 型 号 Type Type	功率 Power kW/4p
32000	0.42	3359	K 167R97 KA 167R97	2.2	50000	2.0	720	K 187R107 KA 187R107	15
	0.52	2741				2.4	614		
	0.63	2252		3		2.9	514		18.5
	0.65	2174				3.3	449		
	0.85	1698		4		4.0	365		30
	1.0	1402				5.5	268		37
	1.1	1291		5.5		6.5	227		
	1.3	1101				7.4	199		45
	1.5	944		7.5		8.8	168		
	1.7	843							
	1.9	757							
	2.6	561		11					
	3.0	479							
	3.4	422		15					
	3.9	367							
	4.7	313		18.5					
	5.4	273		22					
	5.9	250							
	6.7	218	K 167R107						
	7.2	203	KA 167R107	30					
	7.9	185							
	9.0	163		37					
	11	139		45					
	12	121							
50000	0.04	32625	K 187R97 KA 187R97	0.55					
	0.05	27165							
	0.06	24353							
	0.07	19144							
	0.08	16978							
	0.10	14272		0.75					
	0.11	13116							
	0.12	11647							
	0.13	10413		1.1					
	0.15	9363							
	0.17	8126							
	0.19	7333		1.5					
	0.21	6738							
	0.24	5984							
	0.27	5350		2.2					
	0.30	4810							
	0.33	4364		3					
	0.39	3609							
	0.46	3062		4					
	0.56	2519							
	0.63	2268		5.5					
	0.69	2054							
	0.78	1821		7.5					
	0.88	1605							
	1.0	1395		15					
	1.2	1196							
	2.0	737		18.5					
	2.4	619							
	2.8	524							


表上所配功率均有超载,按实际条件确定的转扭不得大于减速机额定转扭。 The power are all overload in the table. The decided torque according to operating condition should not more than gear units' nominal torque.

K




TAIGONG
泰工减速机



K

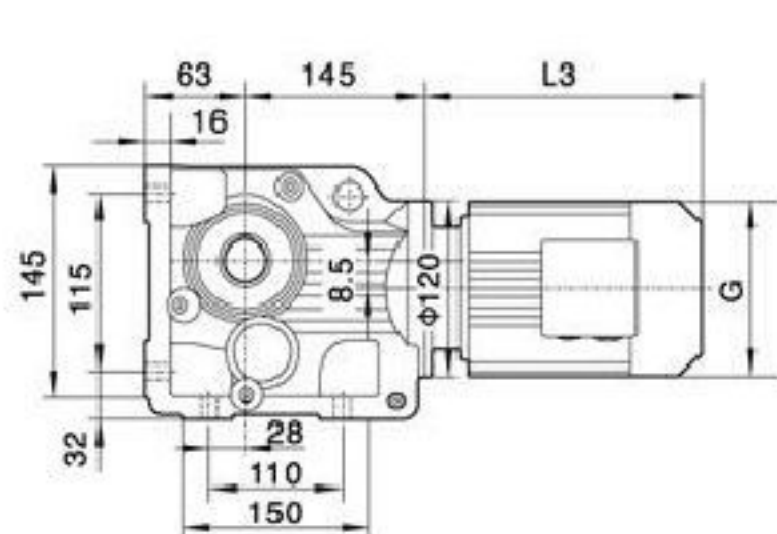


K37

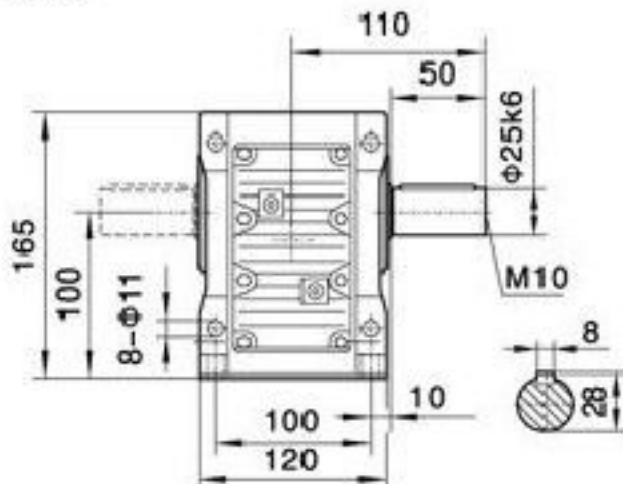



KAB37

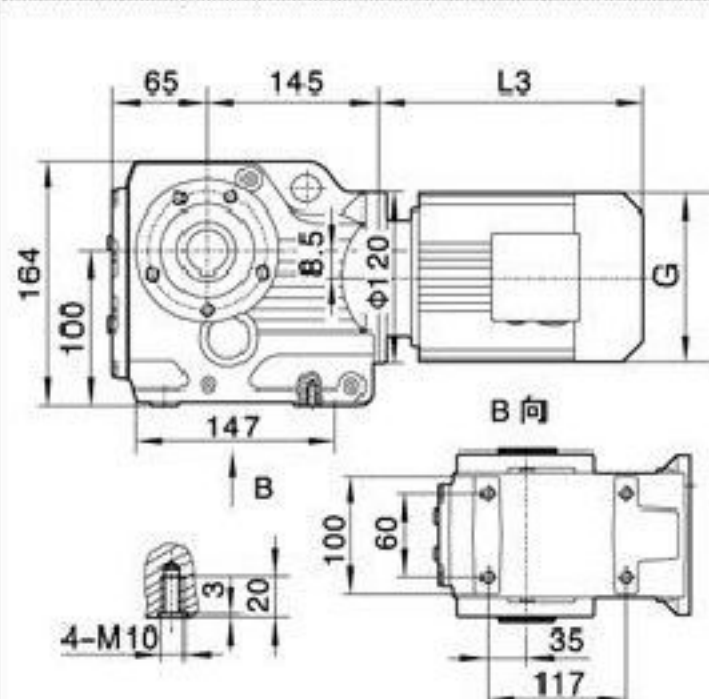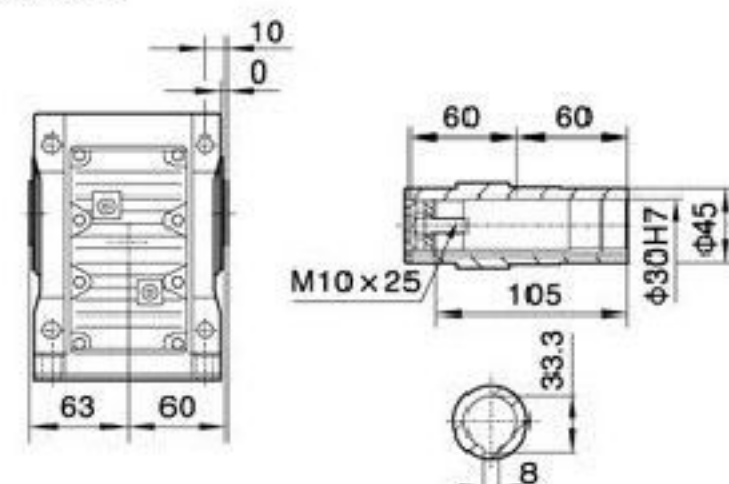


KA37

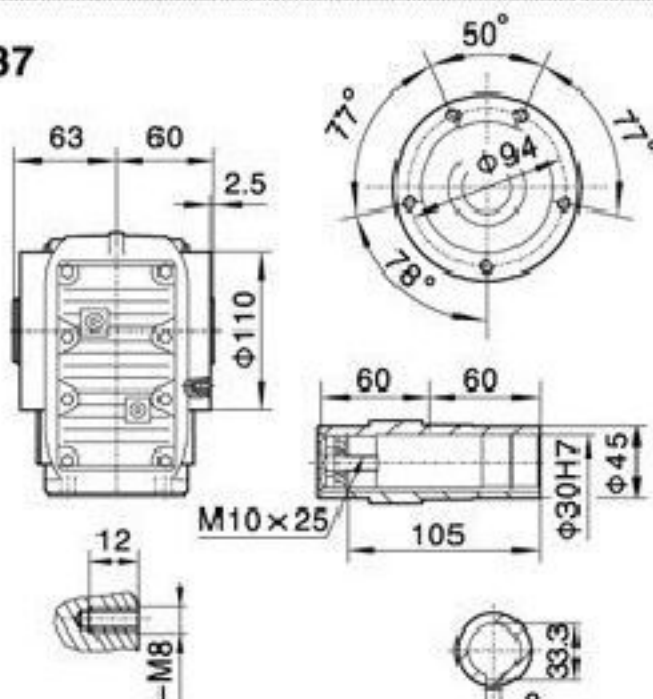


KAZ37

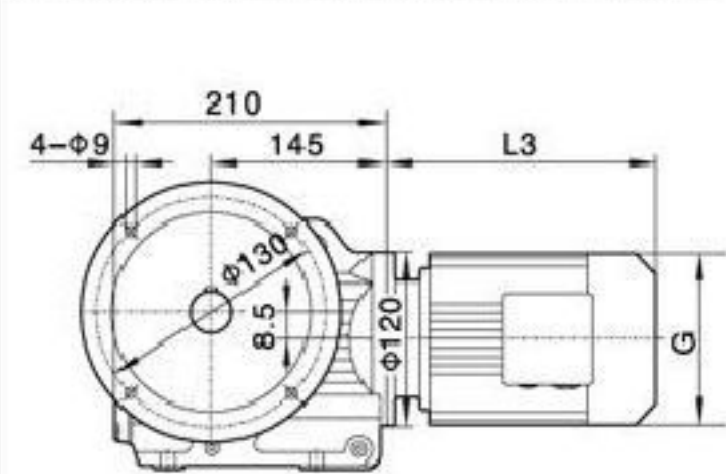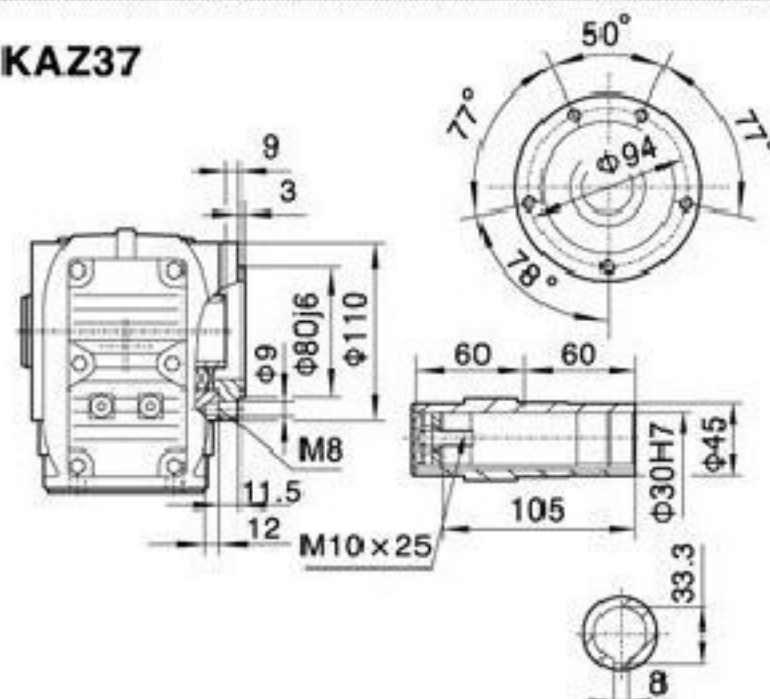


KF37

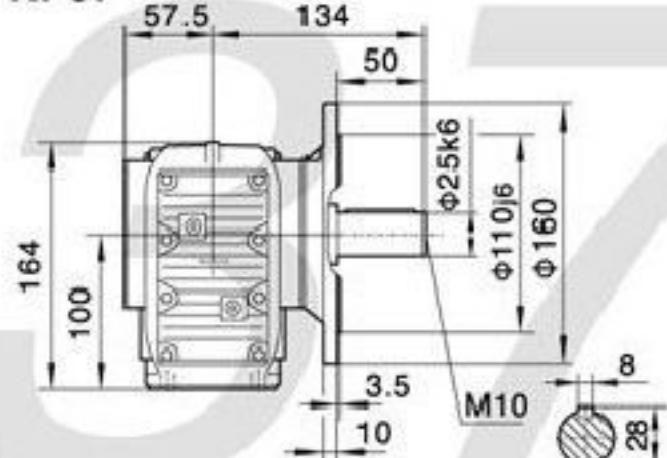


KAF37

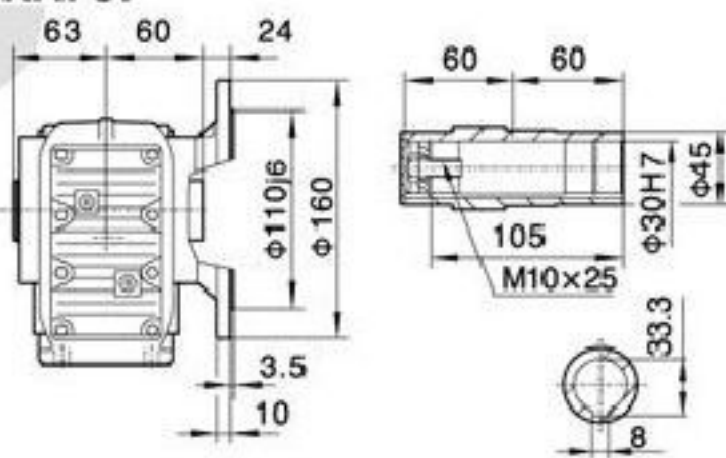


KAT37

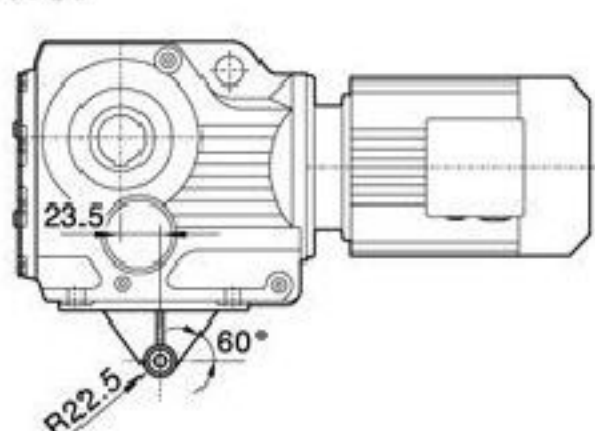


防转臂C面安装
C side of torque-arm

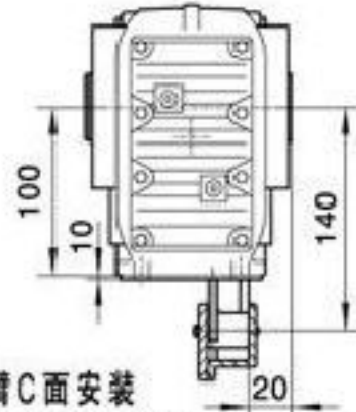


防转臂D面安装
D side of torque-arm

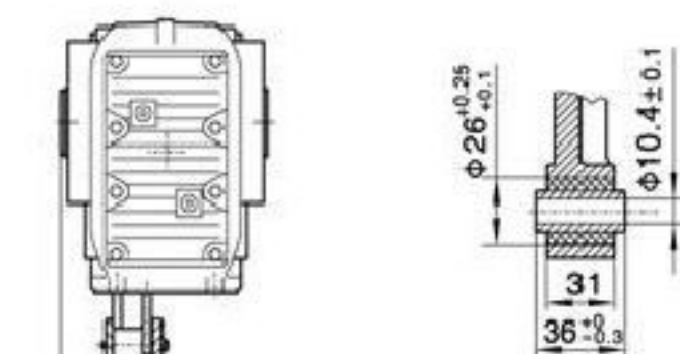


电机需方配或配特殊电机时
需加联接法兰

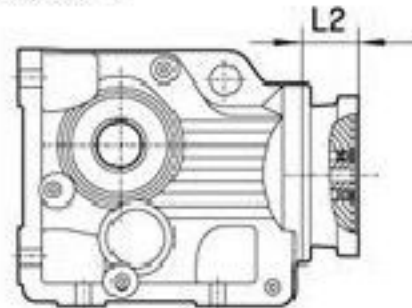

K..S37

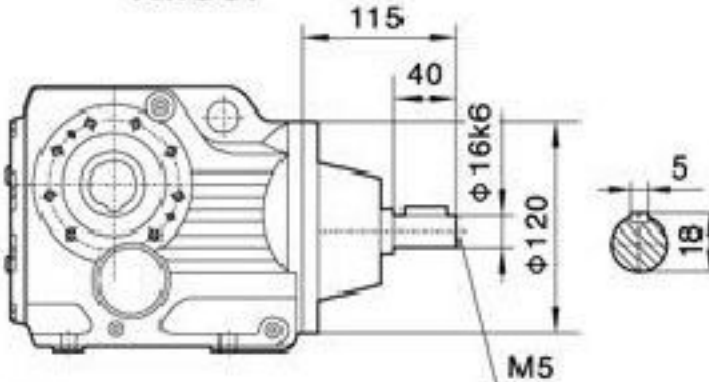

K..37R17

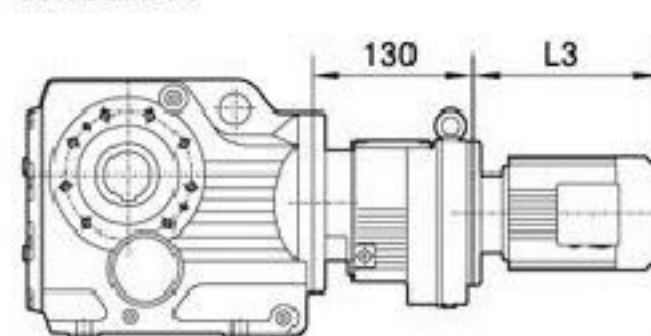


注:其余尺寸见
相对应结构
形式

Note:For other
values please
refer to the o-
pposited stru-
cture.

When equipping the user's motor or the special
one,the flange is required to connected.

Y2电机机座号 Motor size	63	71	80	90S	90L	100				
功率/4P Power/(kW)	0.18	0.25 0.37	0.55 0.75	1.1	1.5	2.2 3.0				
L3	235	245	278	304	328	340				
G	130	145	175	195	195	215				
L2	71	71	71	71	71	93				


注:1.KA, KF, KAF, KAZ壳体为通用件,安装尺寸均可相互参照。 2."K.."表示K, KA, KF, KAF, KAZ, KAB.

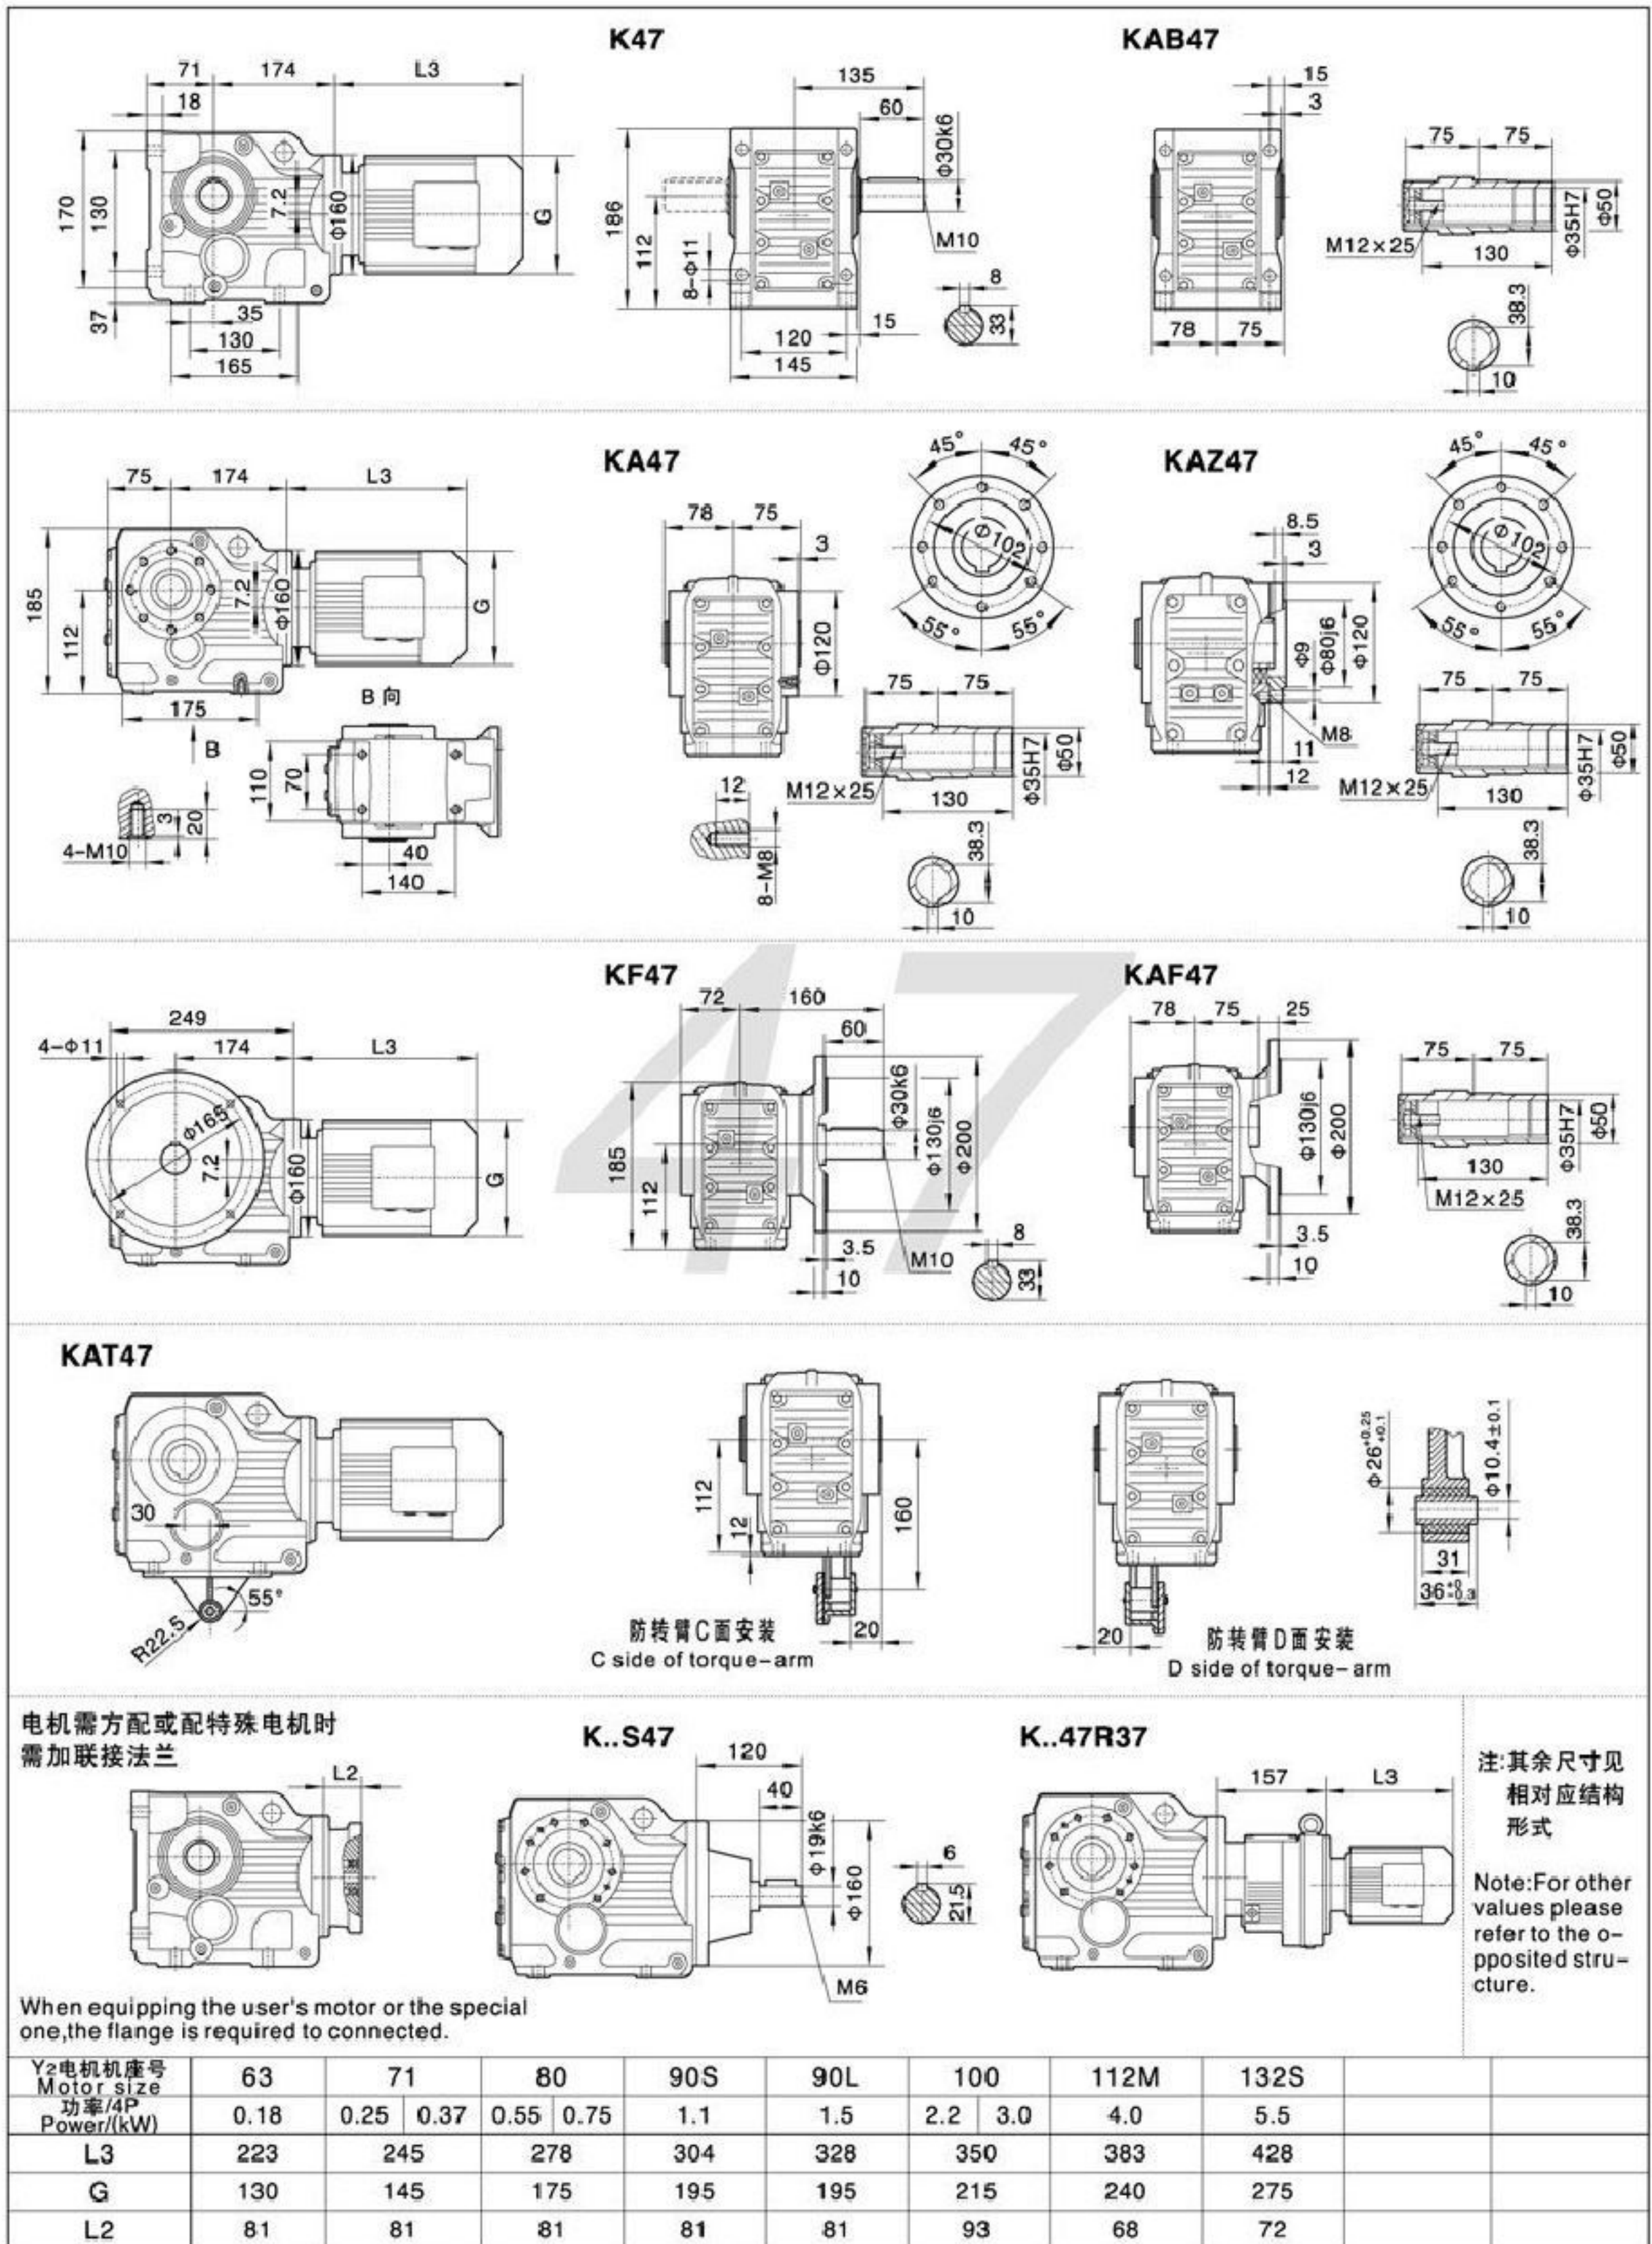




K


K57

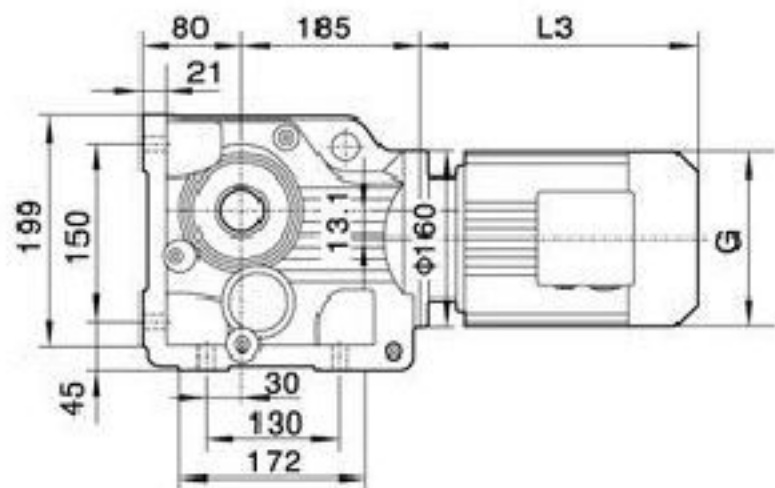


KAB57

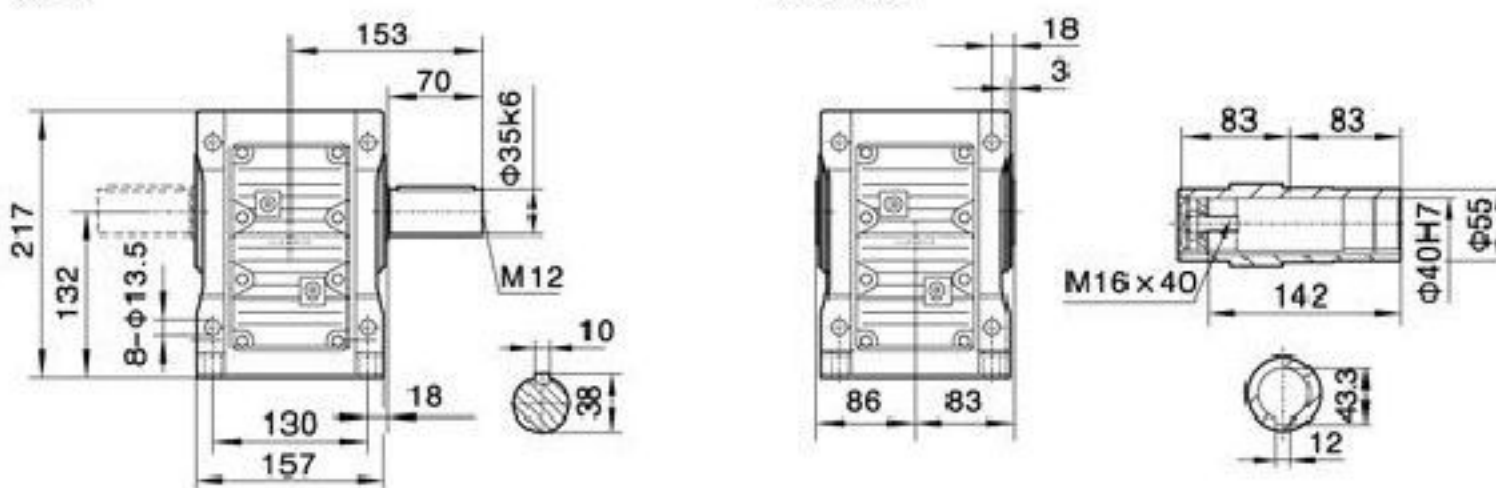


KA57

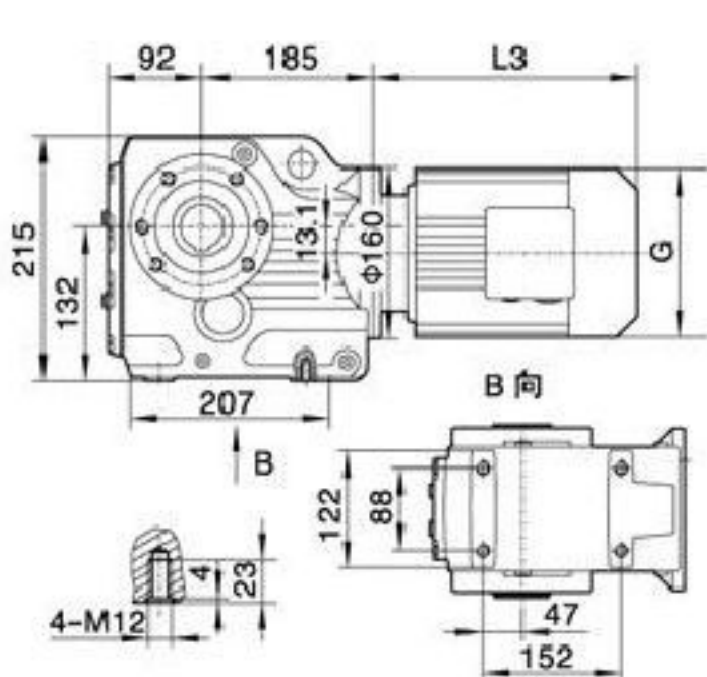


KAZ57

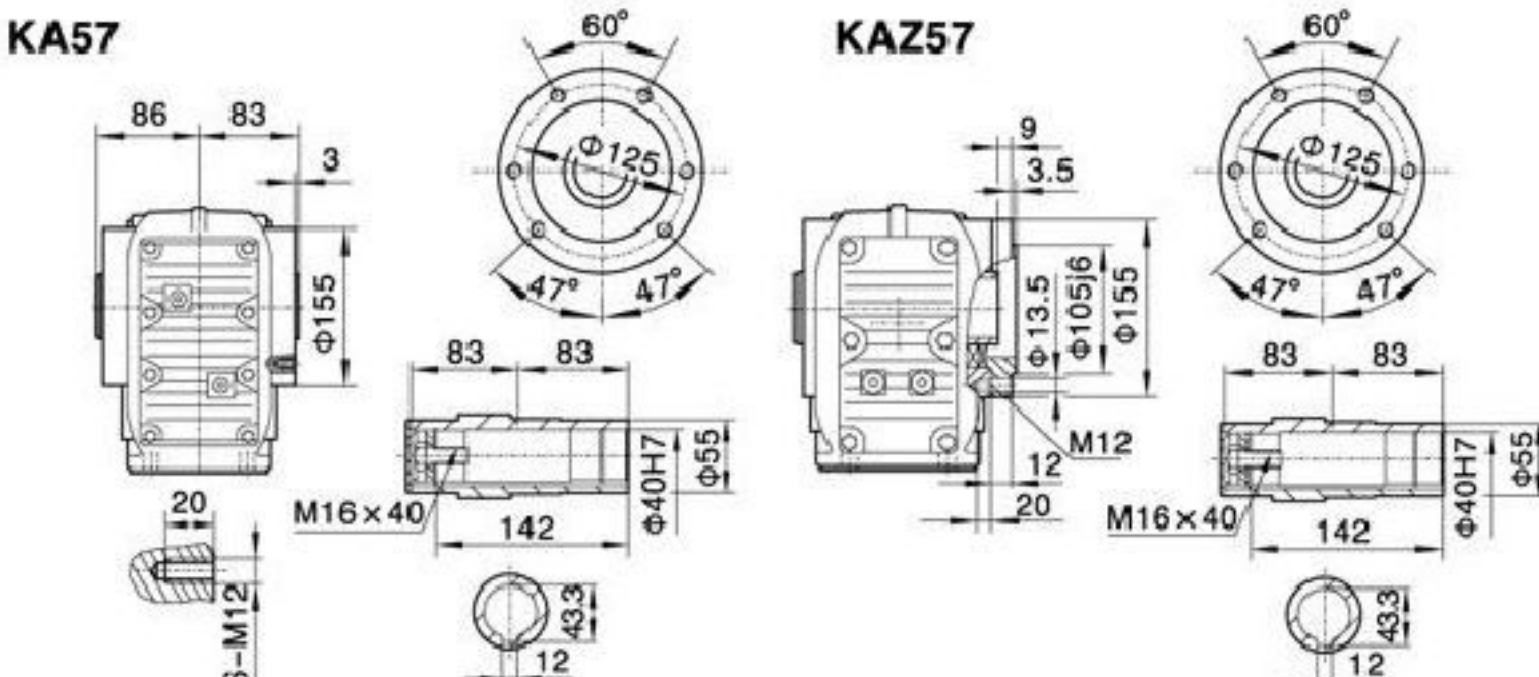


KF57

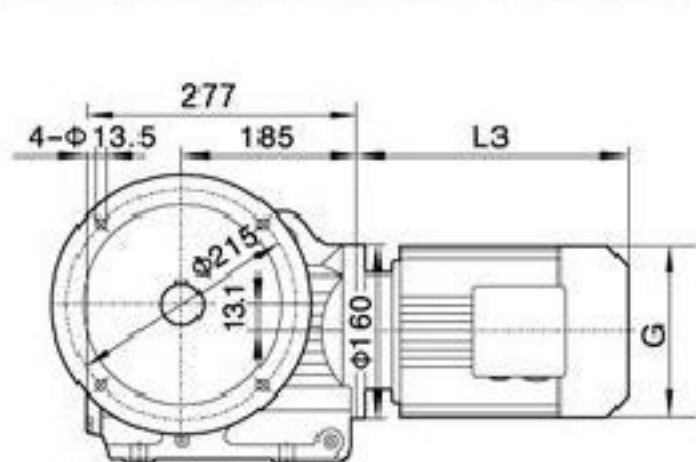


KAF57

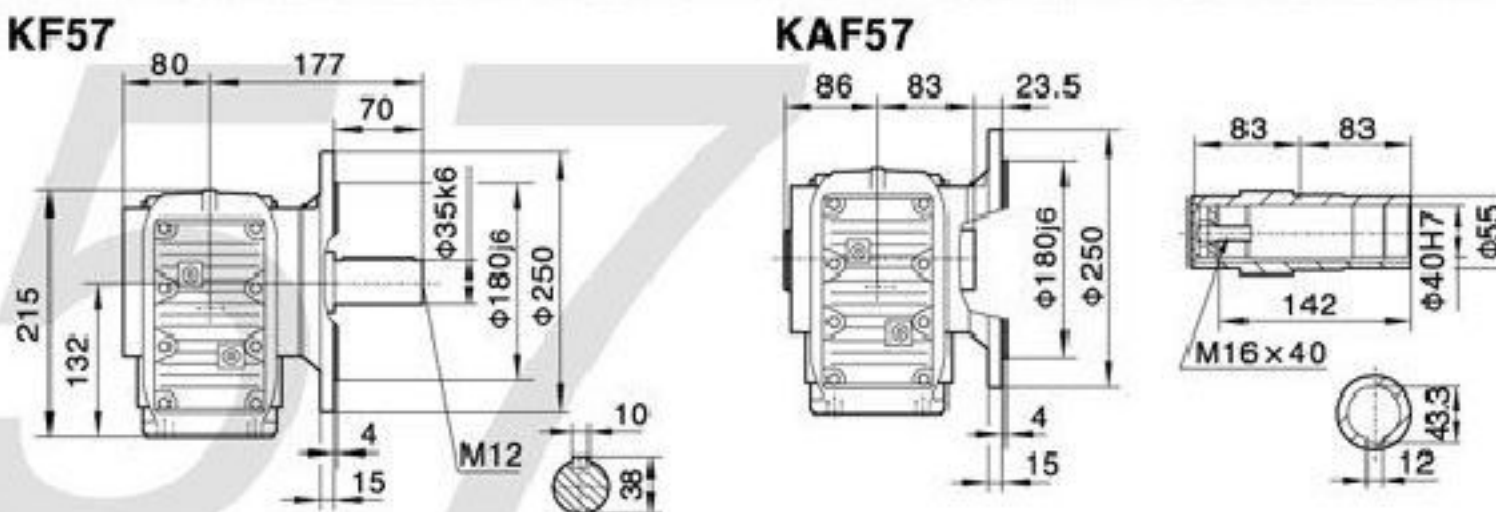


KAT57

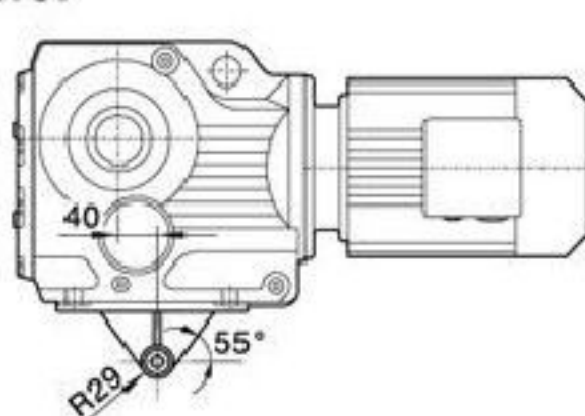


防转臂C面安装
C side of torque-arm

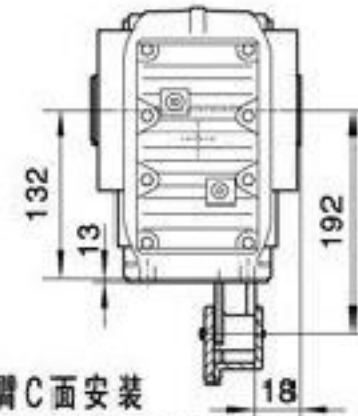


防转臂D面安装
D side of torque-arm

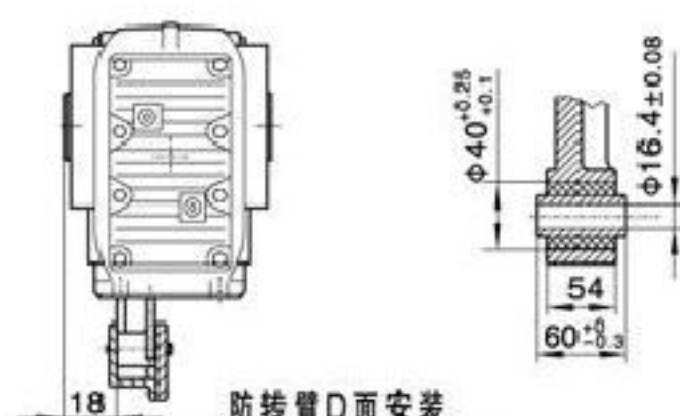


电机需方配或配特殊电机时
需加联接法兰

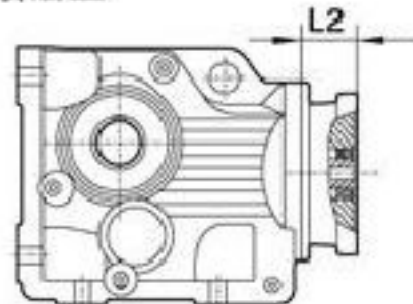

K..S37

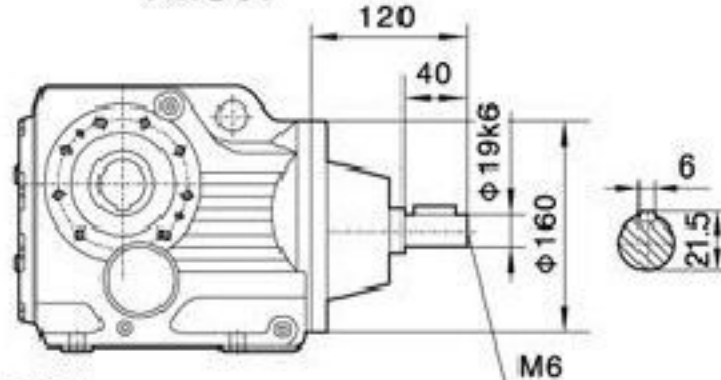

K..57R37

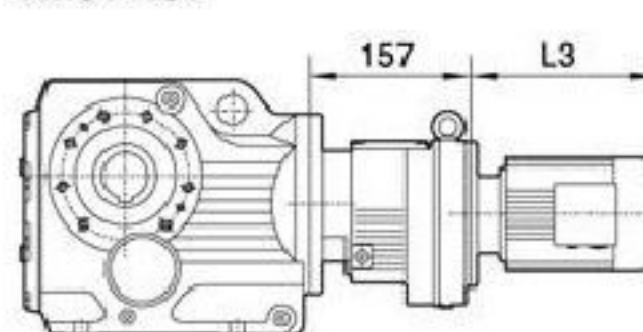









注:其余尺寸见
相对应结构
形式










Note:For other
values please
refer to the o-
pposited stru-
cture.

When equipping the user's motor or the special
one,the flange is required to be connected.




Y2电机机座号 Motor size	63	71	80	90S	90L	100	112M	132S		
功率/4P Power/(kW)	0.18	0.25 0.37	0.55 0.75	1.1	1.5	2.2 3.0	4.0	5.5		
L3	223	245	278	304	328	350	380	425		
G	130	145	175	195	195	215	240	275		
L2	81	81	81	81	81	93	93	101		

注:1.KA、KF、KAF、KAZ壳体为通用件,安装尺寸均可相互参照。 2."K.."表示K、KA、KF、KAF、KAZ、KAB。

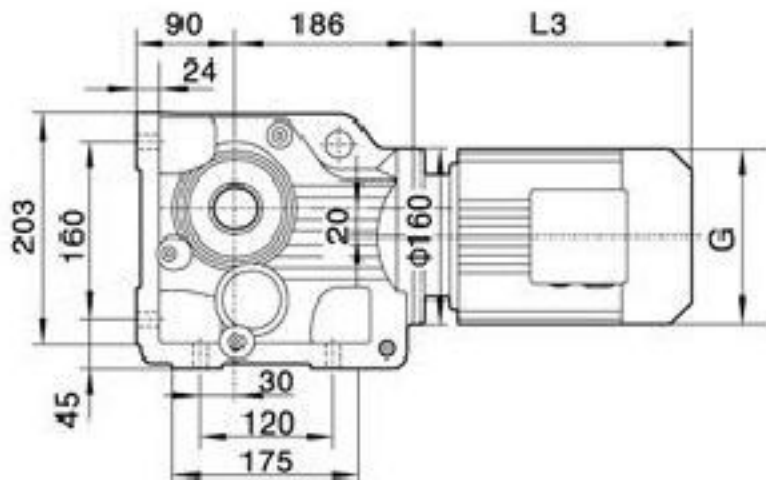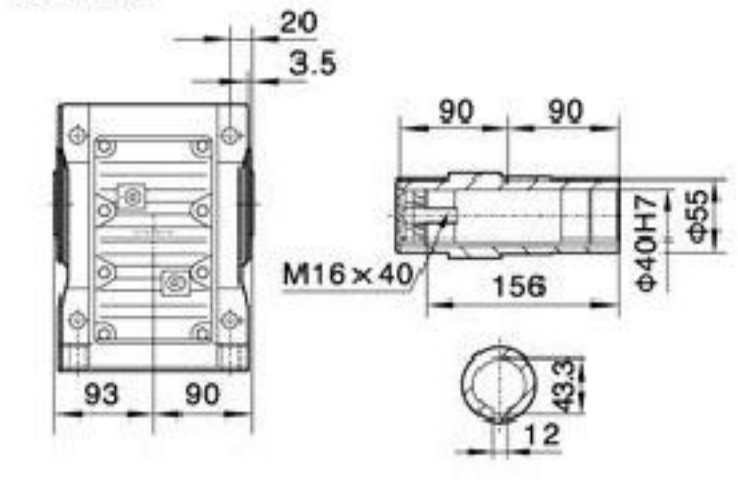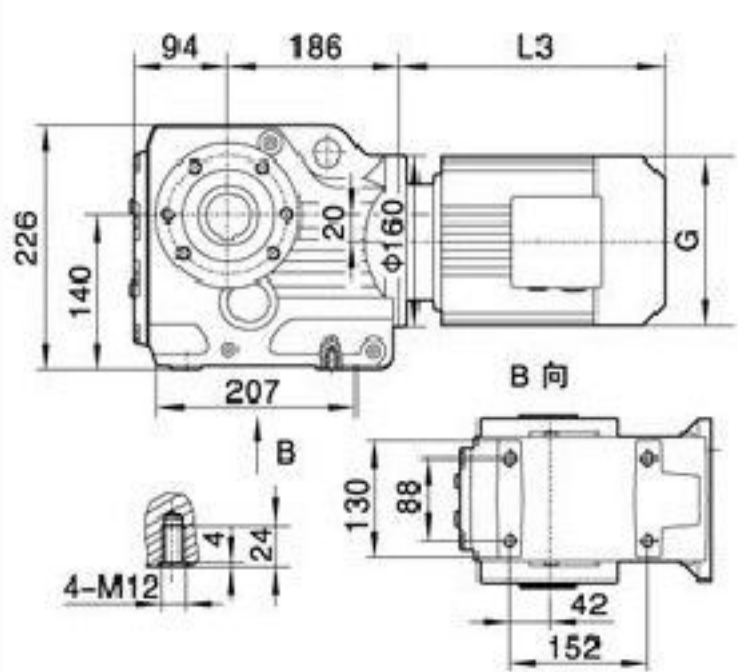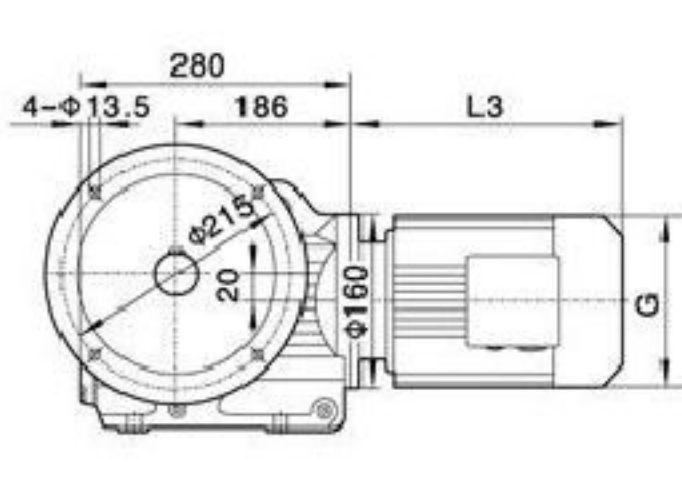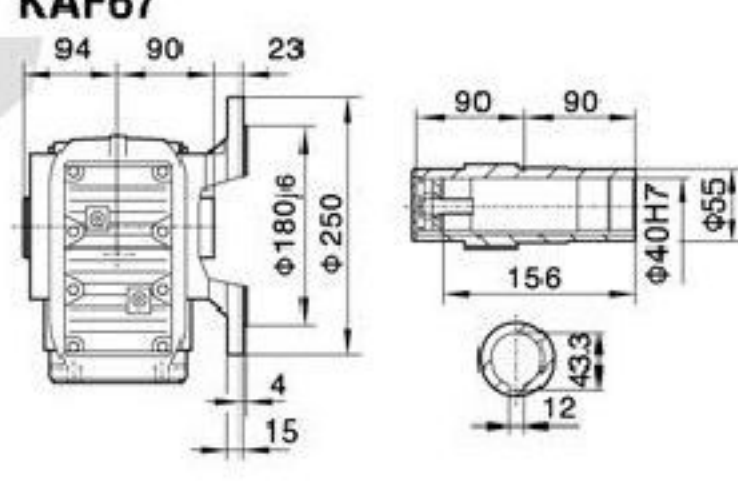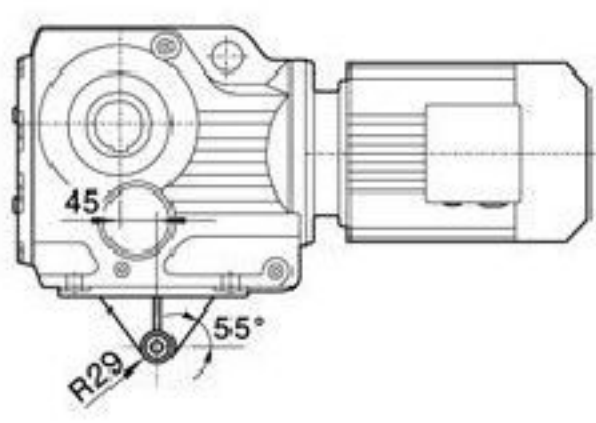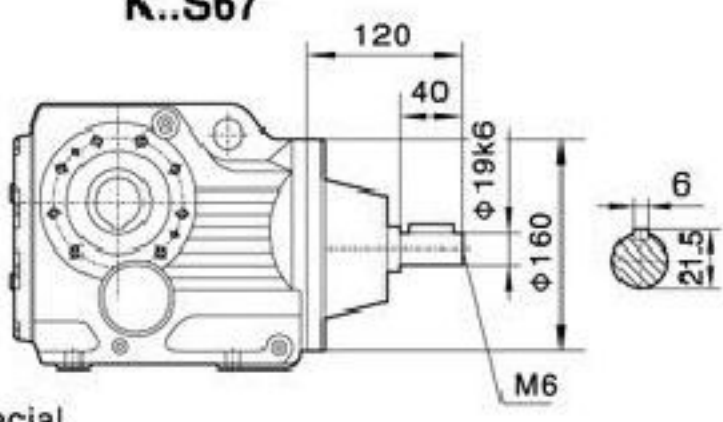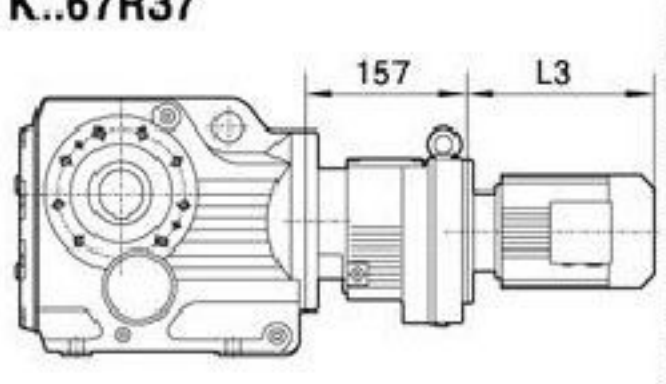
											
											
											
											
											
											
											
											
											
电机需方配或配特殊电机时需加联接法兰 When equipping the user's motor or the special one, the flange is required to be connected. 注:1.KA、KF、KAF、KAZ壳体为通用件,安装尺寸均可相互参照。 2."K.."表示K、KA、KF、KAF、KAZ、KAB. Note: For other values please refer to the opposed structure.											
Y2电机机座号 Motor size	63	71	80	90S	90L	100	112M	132S			
功率/4P Power/(kW)	0.18	0.25 0.37	0.55 0.75	1.1	1.5	2.2 3.0	4.0	5.5			
L3	223	245	278	304	328	350	380	425			
G	130	145	175	195	195	215	240	275			
L2	81	81	81	81	81	93	93	101			

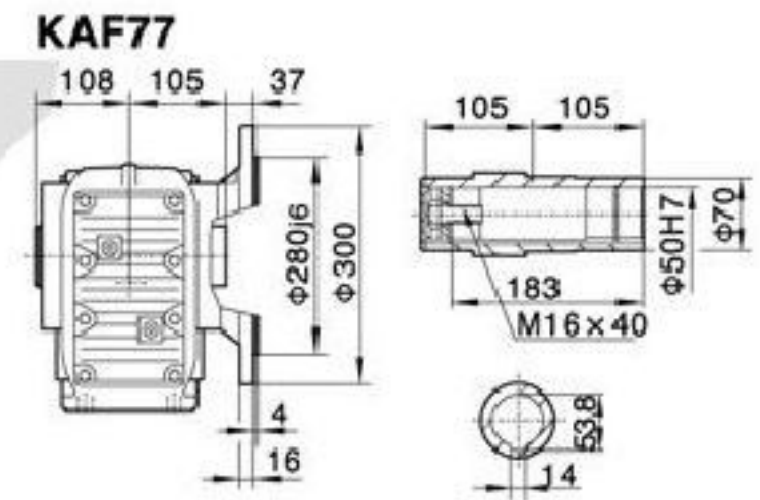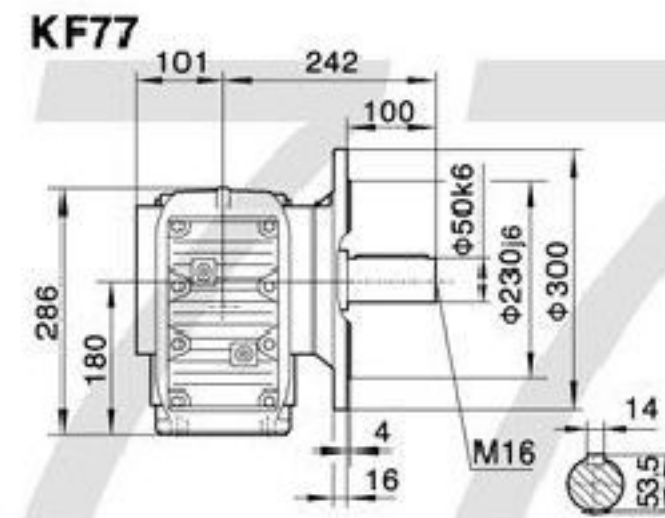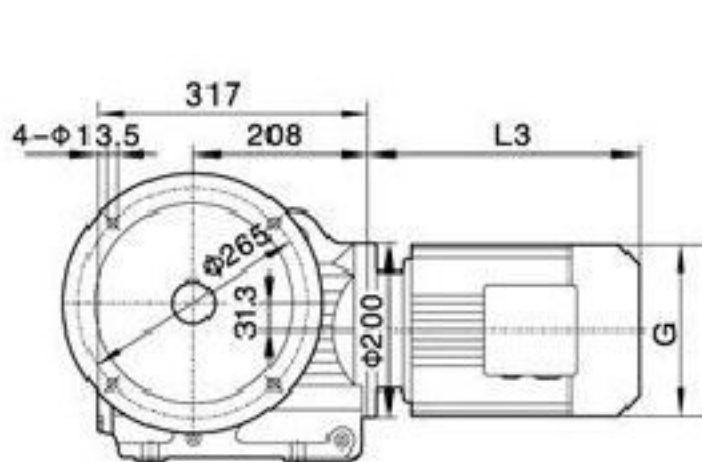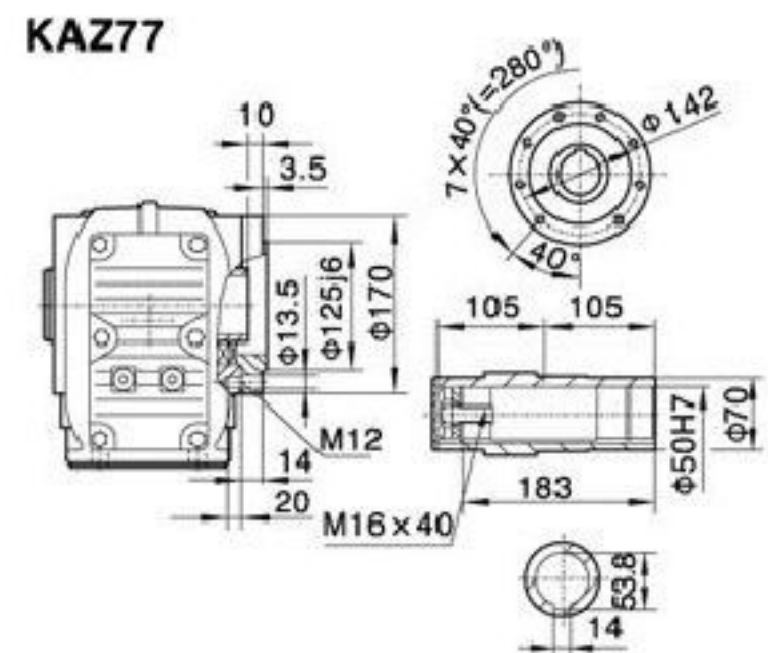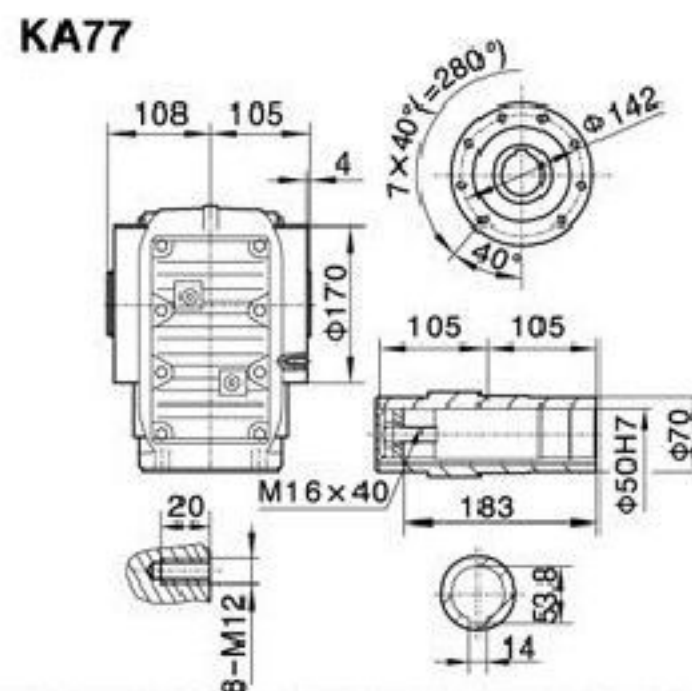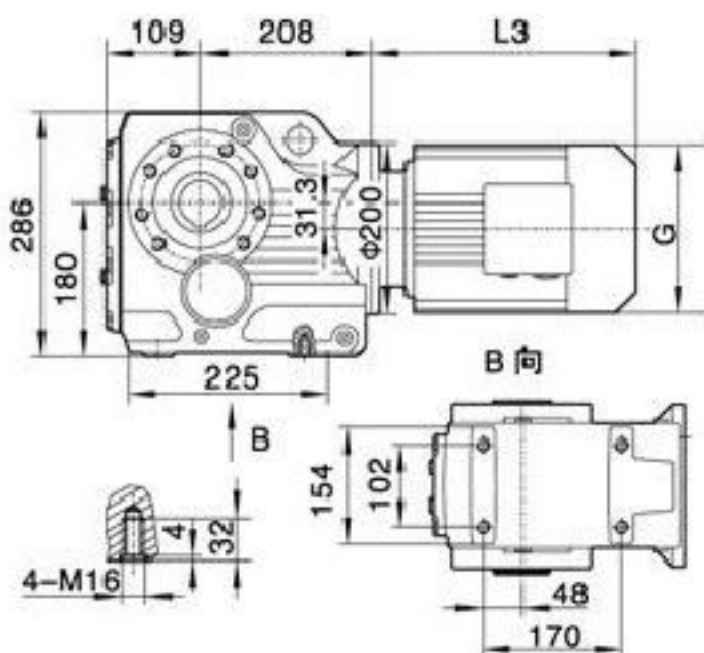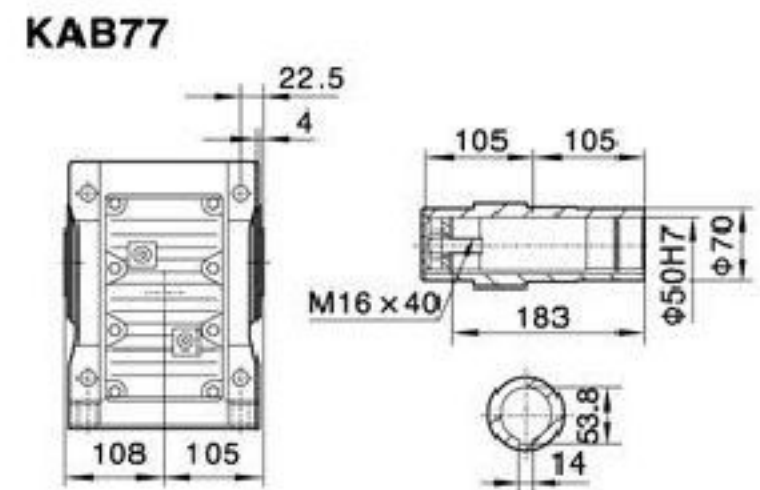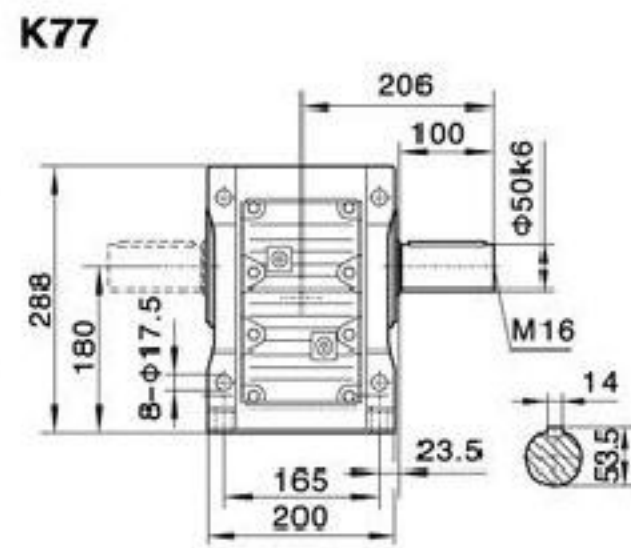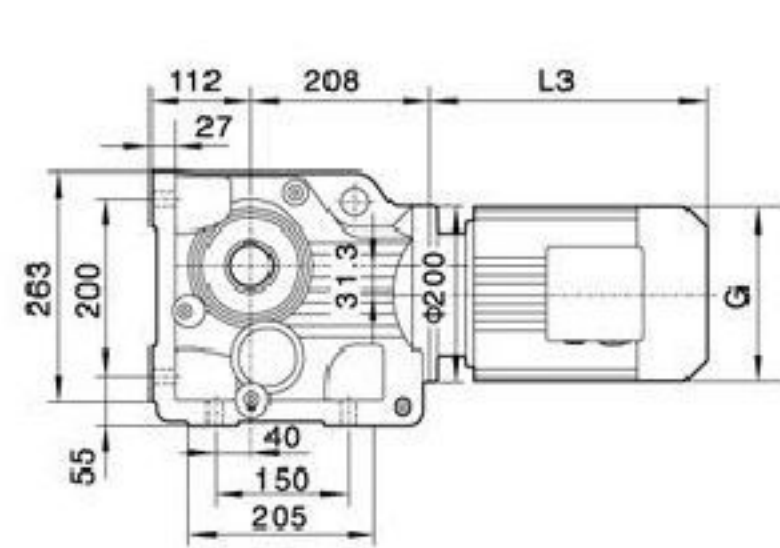


KAT77

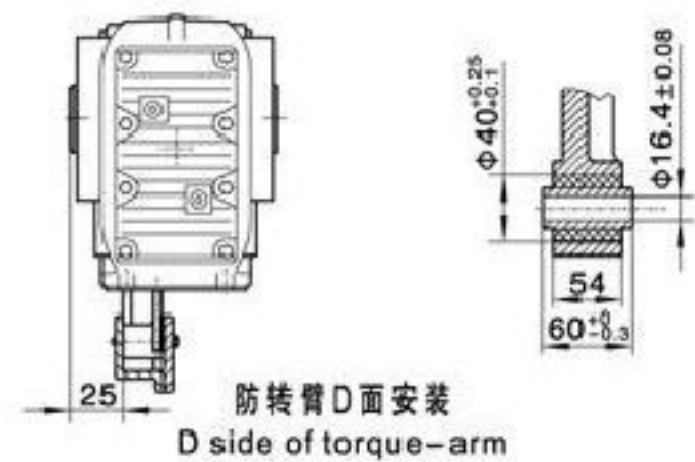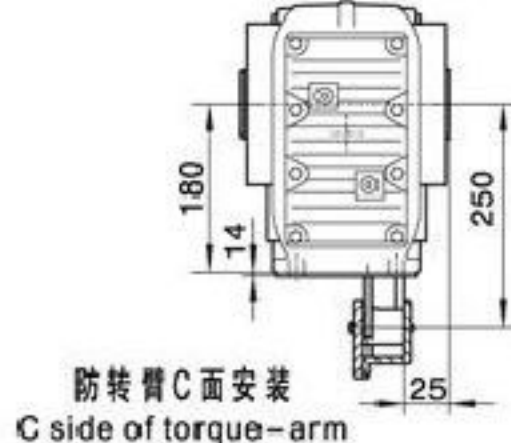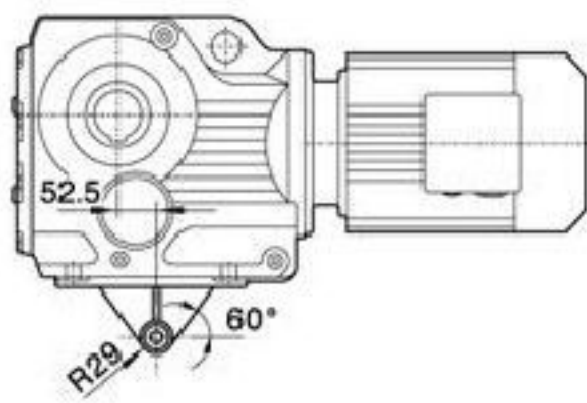


电机需方配或配特殊电机时需加联接法兰

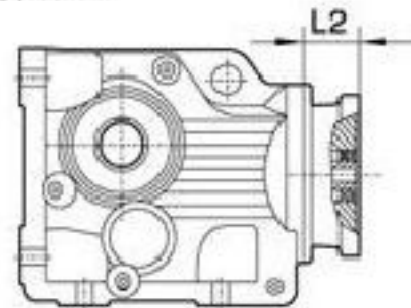

K..S77

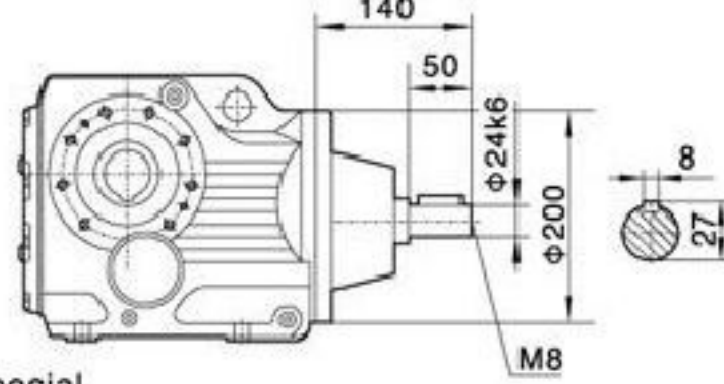

K..77R37

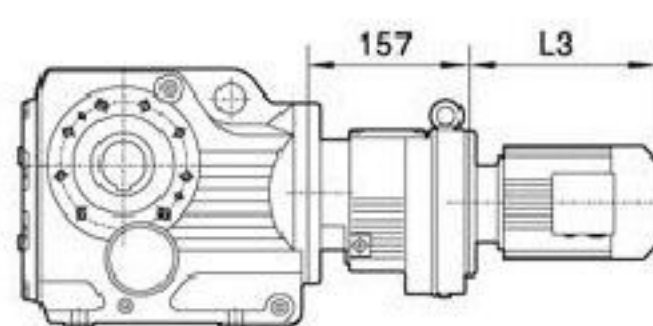


注:其余尺寸见相对应结构形式

Note:For other values please refer to the opposed structure.


When equipping the user's motor or the special one, the flange is required to be connected.

Y2电机机座号 Motor size 功率/4P Power/(kW)	71	80	90S	90L	100	112M	132S	132M	160M
L3	233	278	304	328	350	380	425	461	524
G	145	175	195	195	215	240	275	275	330
L2	81	81	81	81	93	93	101	101	126



注:1.KA、KF、KAF、KAZ壳体为通用件,安装尺寸均可相互参照。 2."K.."表示K、KA、KF、KAF、KAZ、KAB.

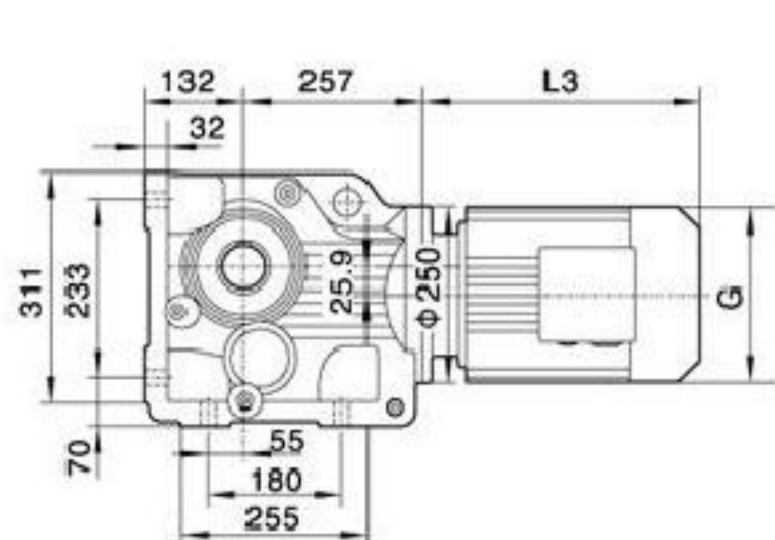


K87

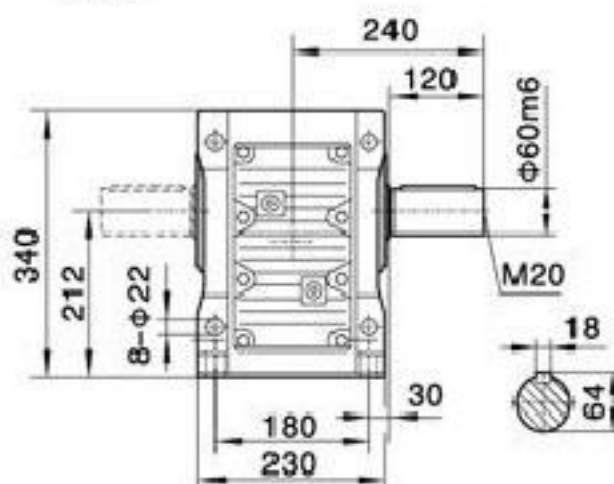



KAB87

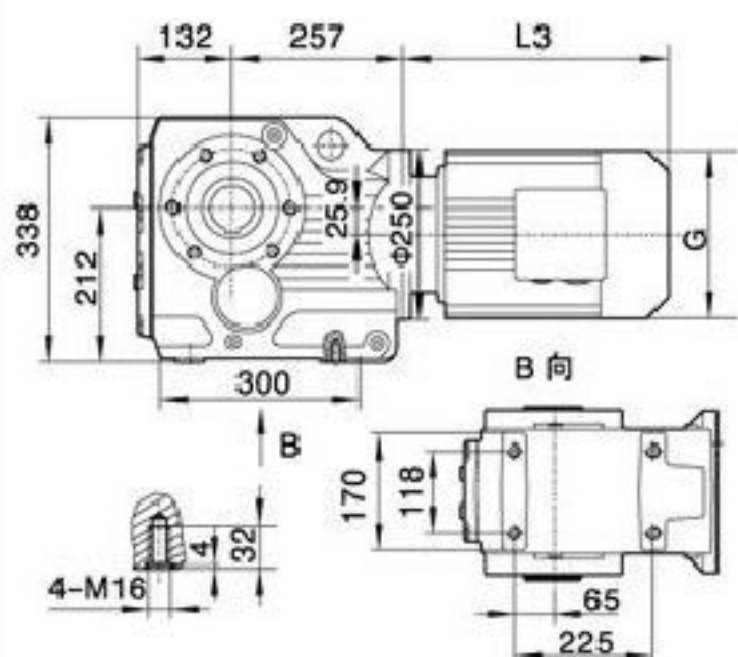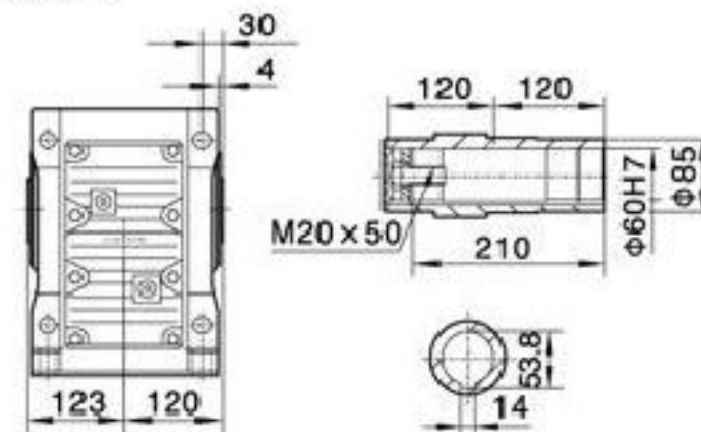


KA87

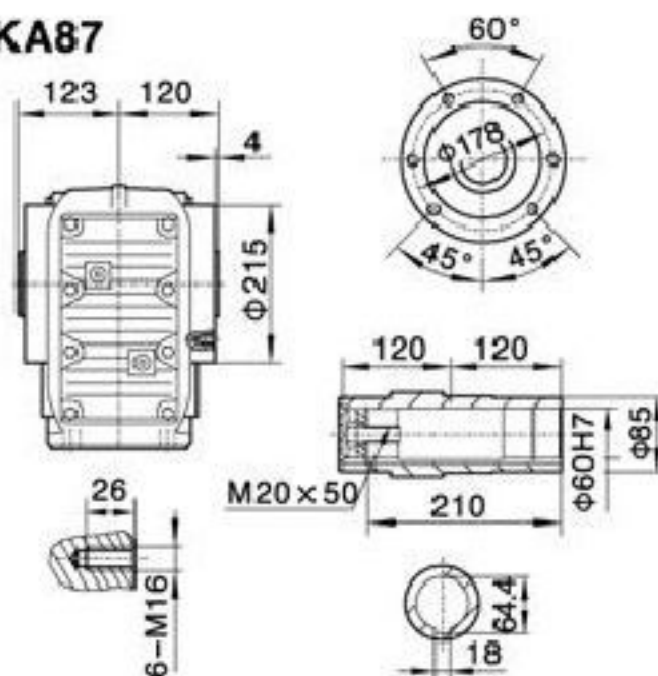


KAZ87

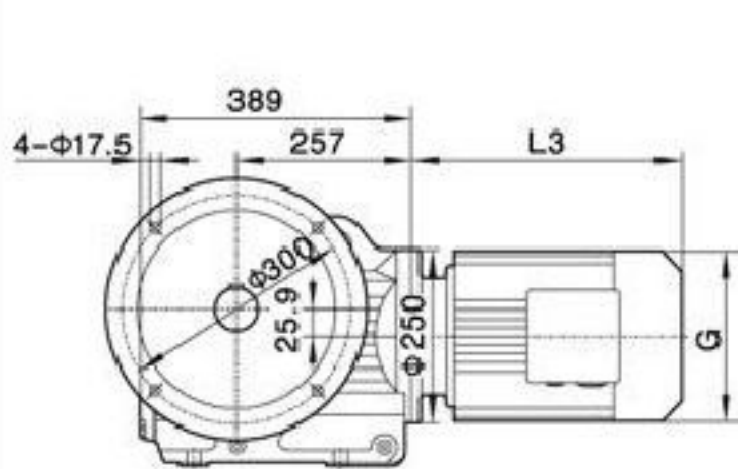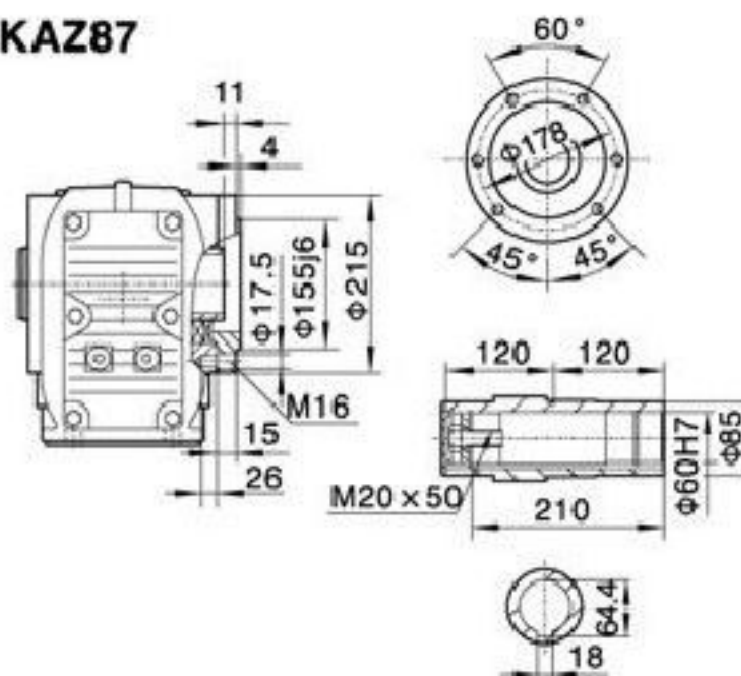




KF87

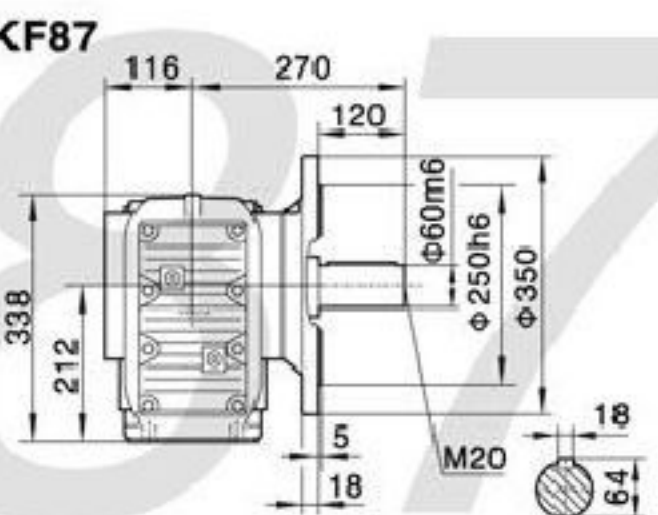


KAF87

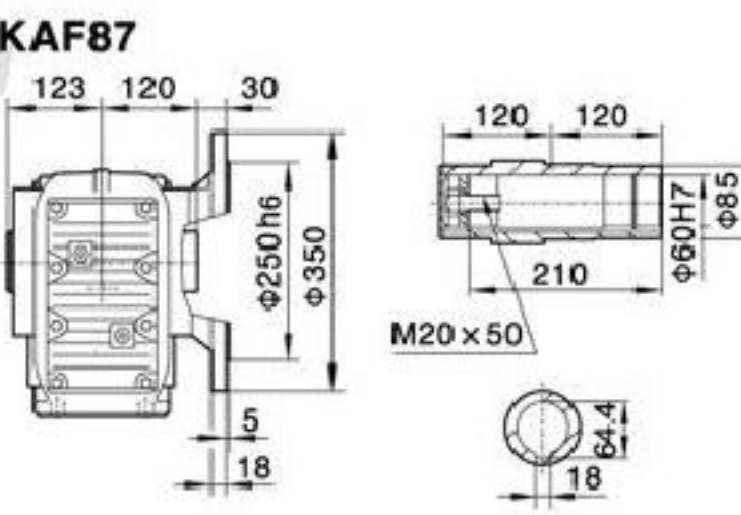


KAT87

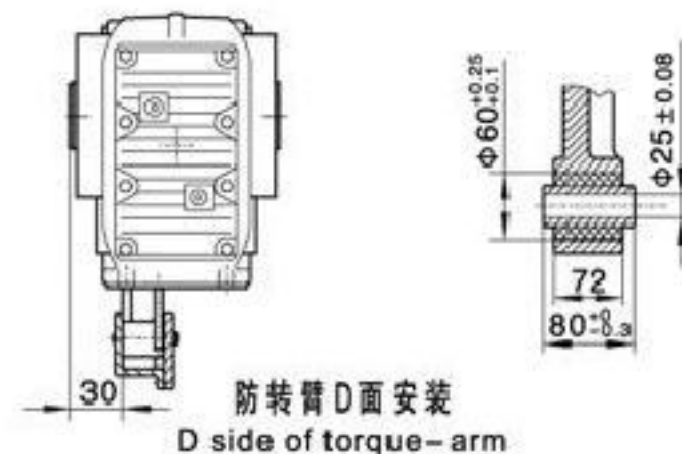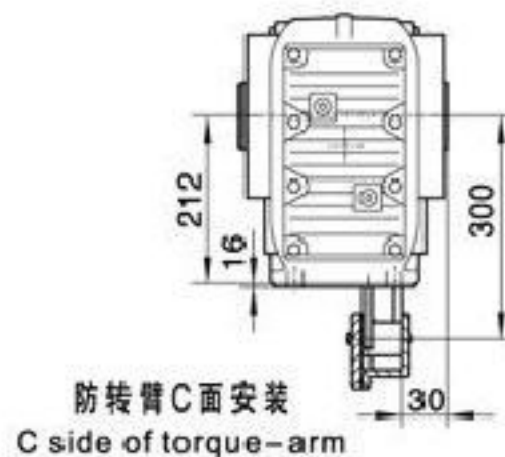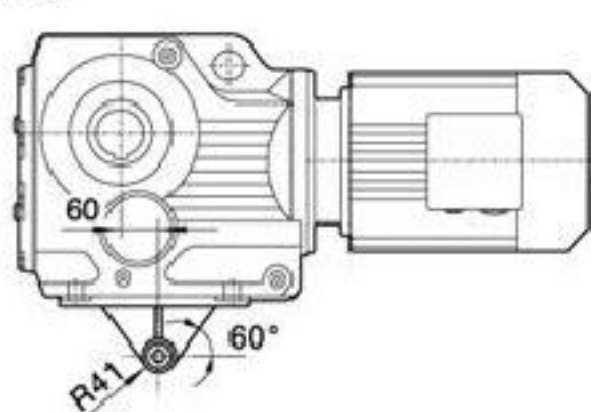


电机需方配或配特殊电机时需加联接法兰

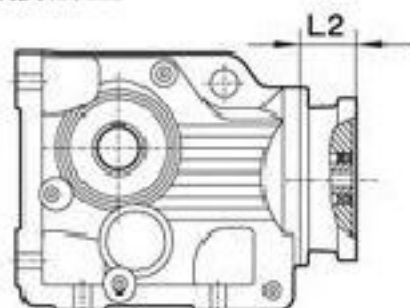

K..S87

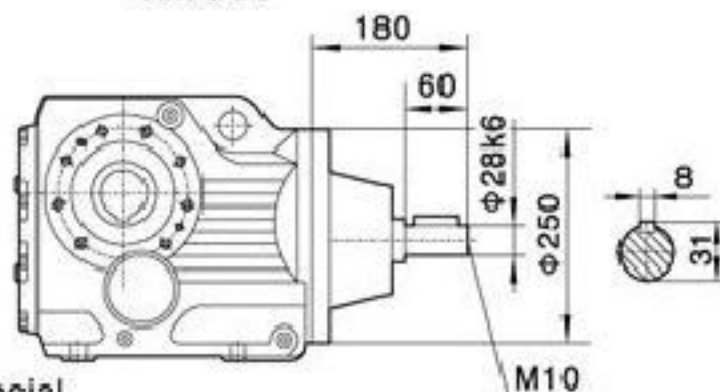

K..87R57

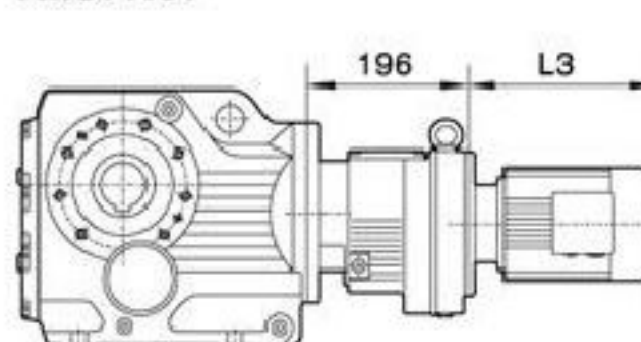

注:其余尺寸见相对应结构形式

Note:For other values please refer to the opposite structure.

When equipping the user's motor or the special one, the flange is required to connected.

Y2电机机座号 Motor size	80	90S	90L	100	112M	132S	132M	160M	160L	180M	180L
功率/4P Power/(kW)	0.75	1.1	1.5	2.2	3.0	4.0	5.5	7.5	11	15	22
L3	246	280	304	350	380	425	461	524	547	583	616
G	175	195	195	215	240	275	275	330	330	380	380
L2	86	86	86	71	71	101	101	126	126	126	126



注:1.KA、KF、KAF、KAZ壳体为通用件,安装尺寸均可相互参照。 2."K.."表示K、KA、KF、KAF、KAZ、KAB.




TAIGONG
泰工减速机

K



K97

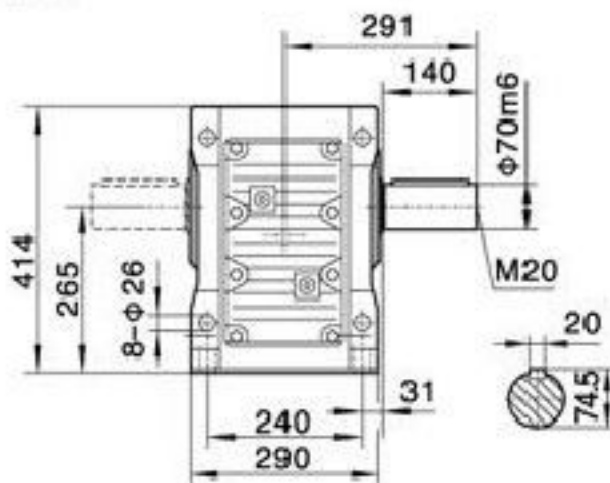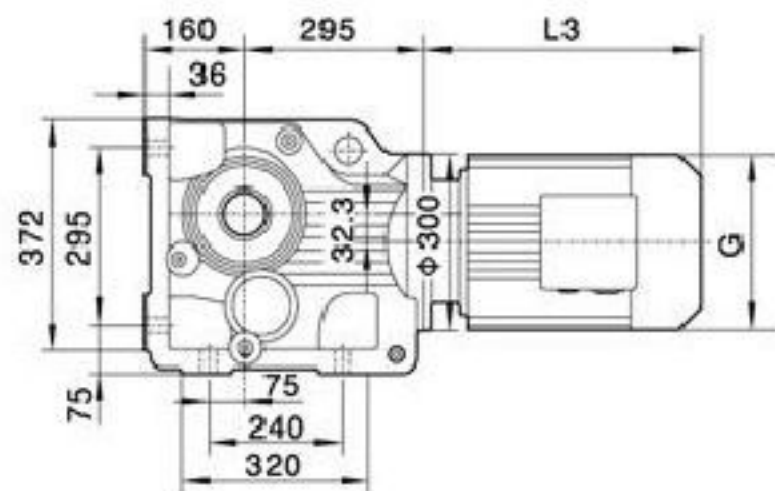

KAB97

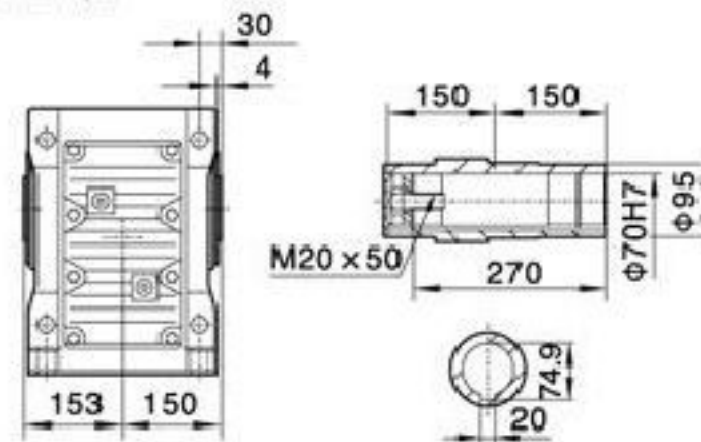



KA97

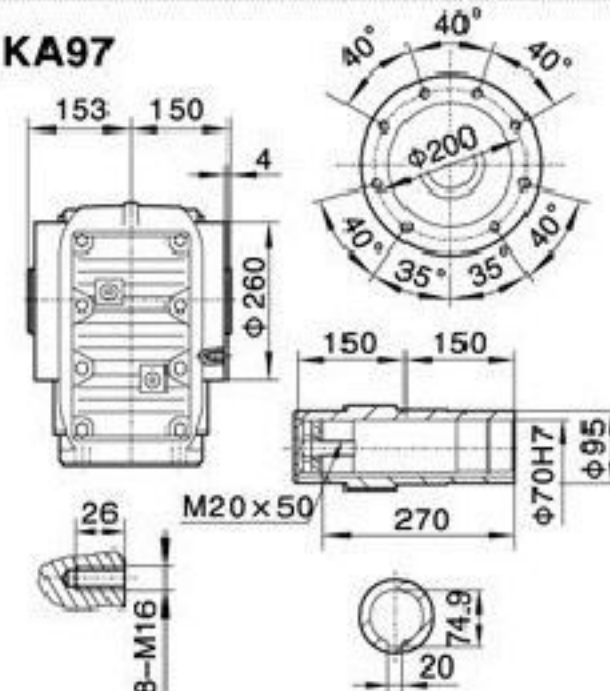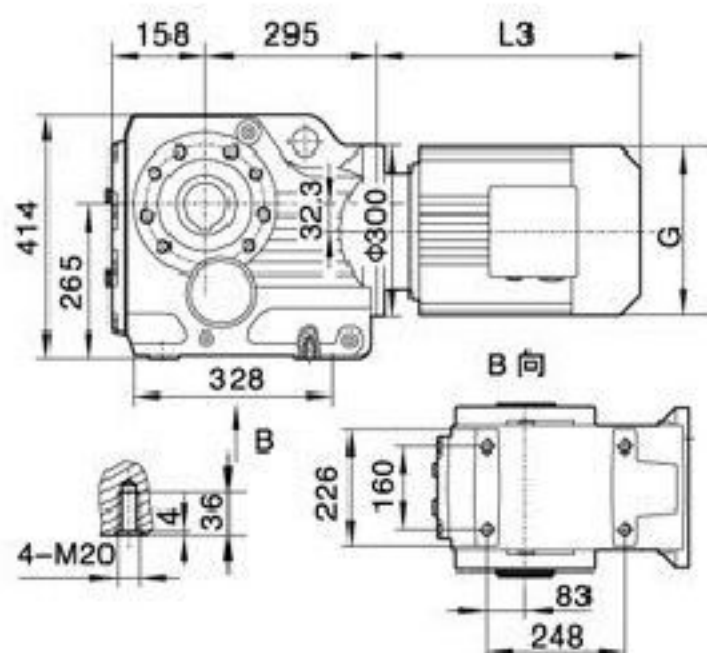


KAZ97






KF97

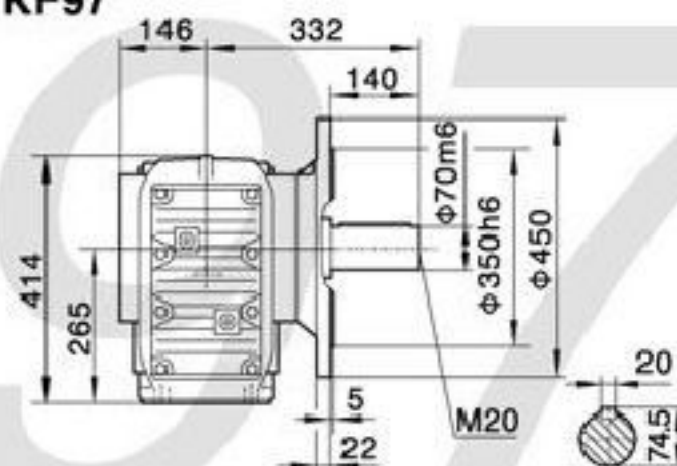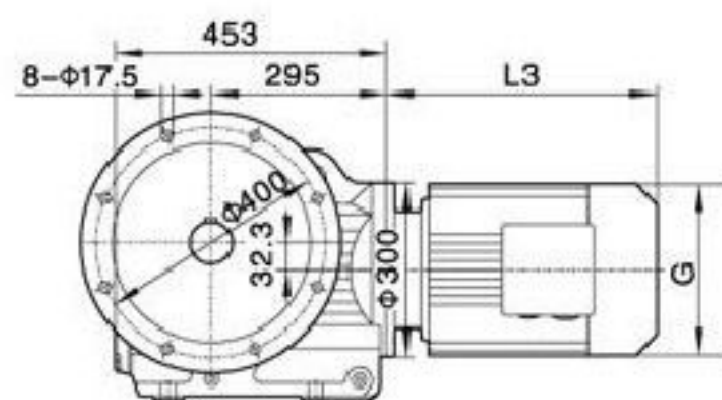


KAF97

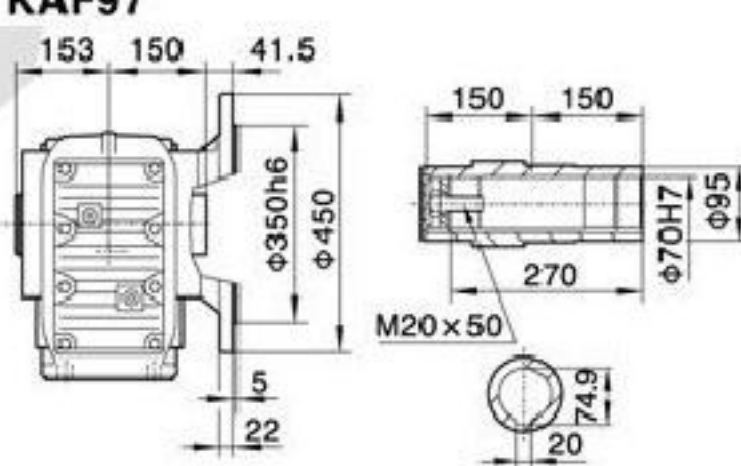


KAT97

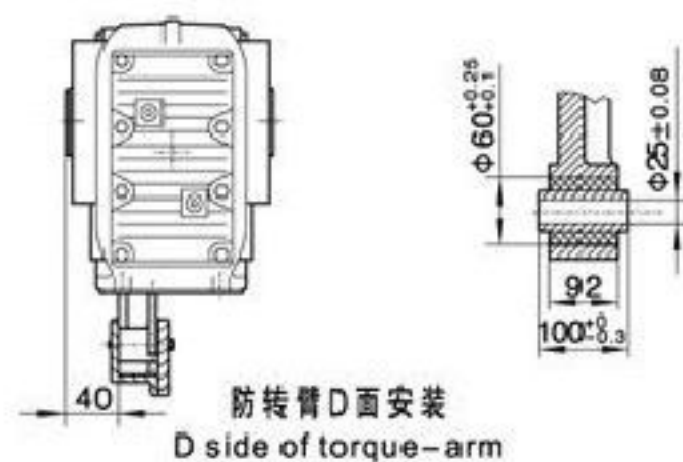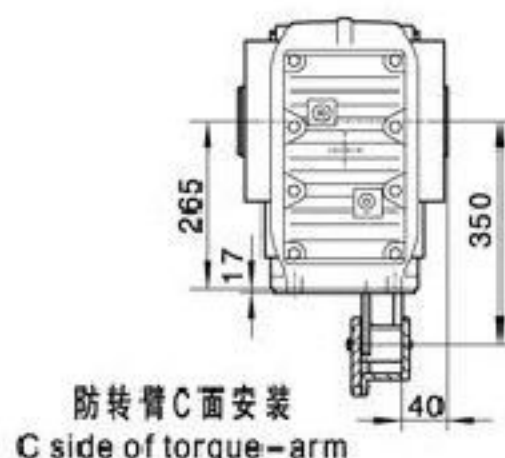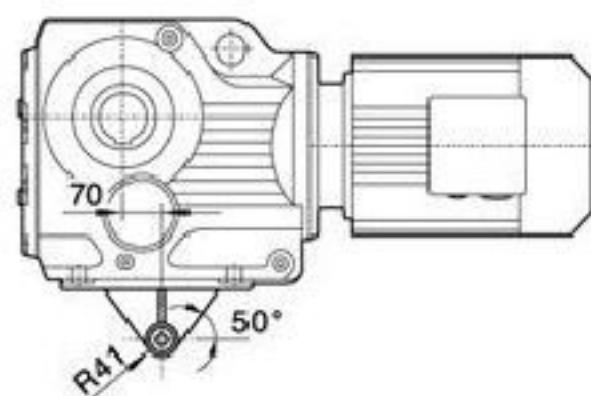


电机需方配或配特殊电机时
需加联接法兰

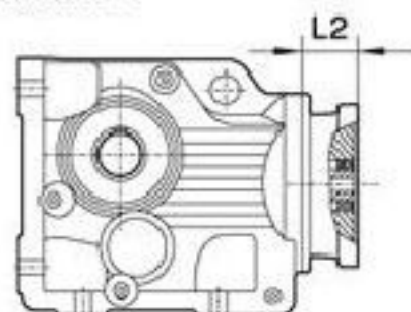

K..S97

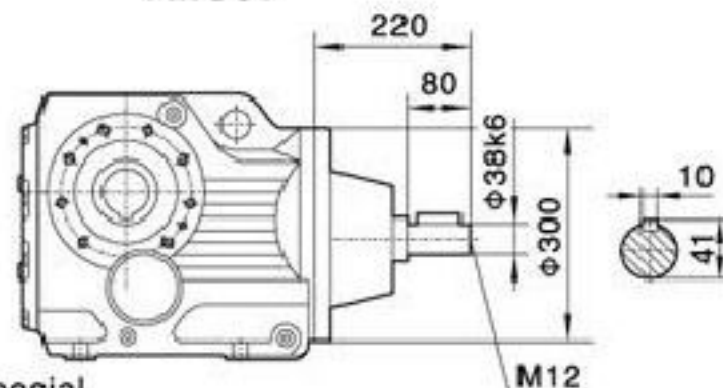

K..97R57

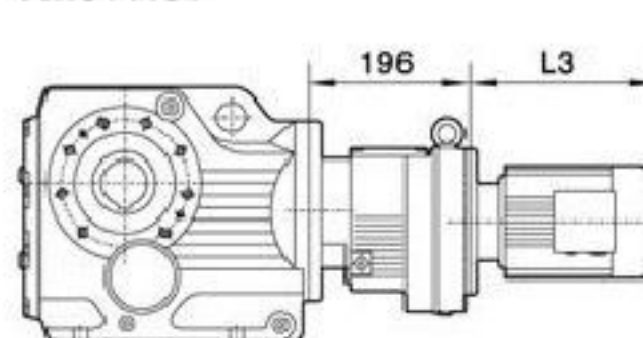


注:其余尺寸见
相对应结构
形式

Note:For other
values please
refer to the o-
pposited stru-
cture.


When equipping the user's motor or the special
one,the flange is required to be connected.

Y2电机机座号 Motor size	90S	90L	100	112M	132S	132M	160M	160L	180M	180L	200
功率/4P Power/(kW)	1.1	1.5	2.2 3.0	4.0	5.5	7.5	11	15	18.5	22	30
L3	280	304	315	334	425	461	524	547	555	588	652
G	195	195	215	240	275	275	330	330	380	380	420
L2	86	86	101	101	101	101	126	126	126	126	132


注:1.KA、KF、KAF、KAZ壳体为通用件,安装尺寸均可相互参照。 2."K.."表示K、KA、KF、KAF、KAZ、KAB.





K127

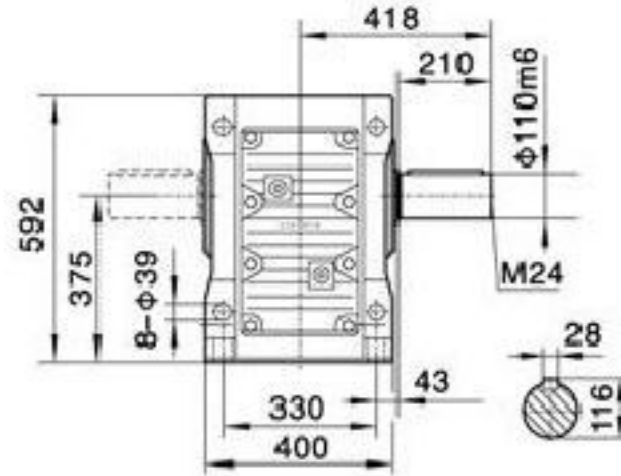


KA(KAB)127

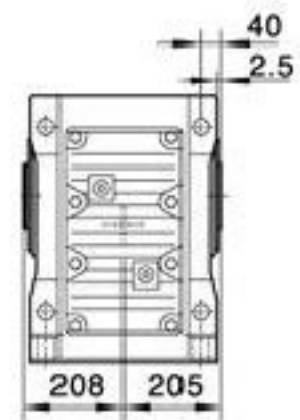


KAZ127

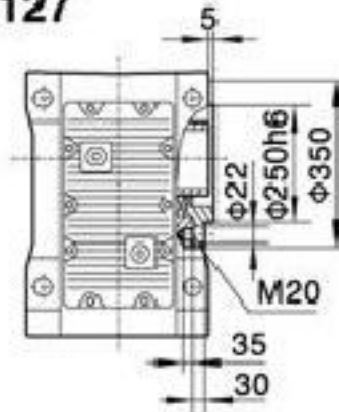


KA127/KAF127/KAZ127
空心轴/Hollow shaft

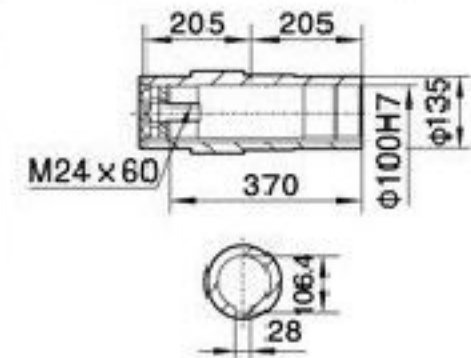


KF127

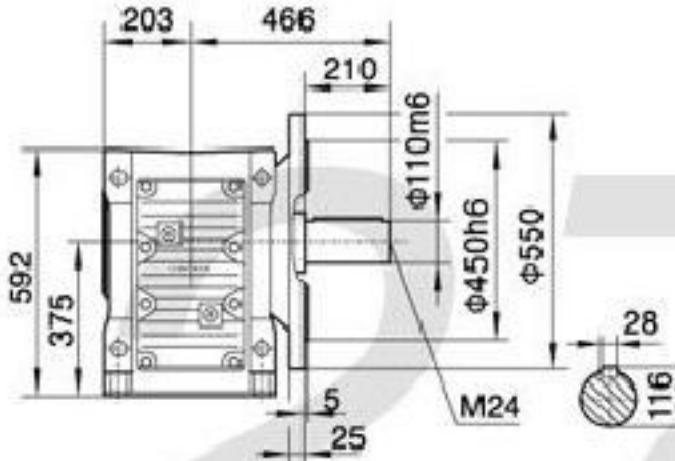


KAF127

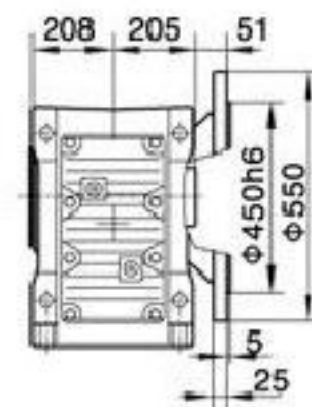



KAT127

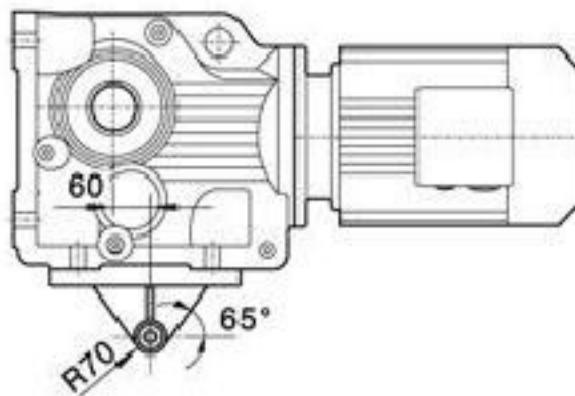


防转臂C面安装
C side of torque-arm

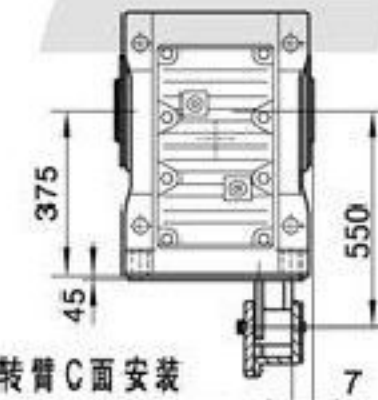


防转臂D面安装
D side of torque-arm

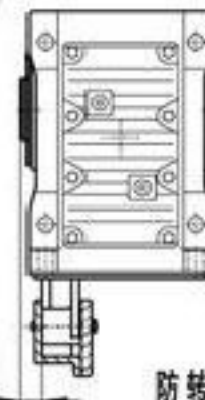


电机需方配或配特殊电机时
需加联接法兰

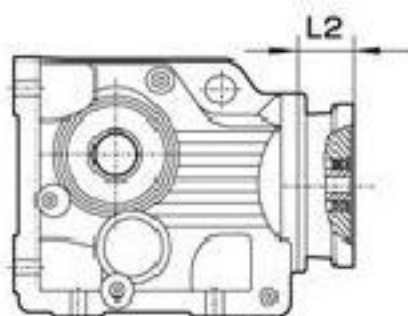

K..S127

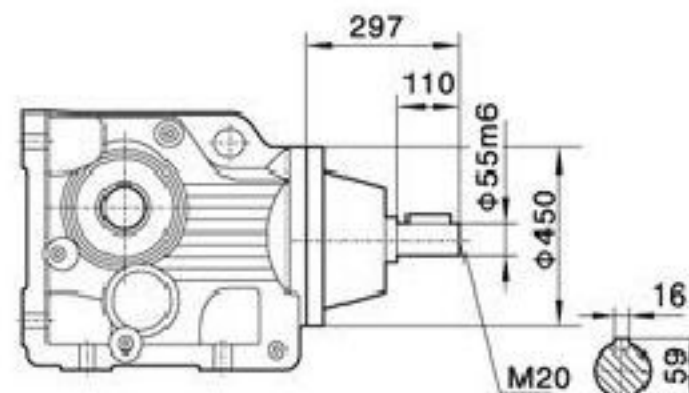

K..127R77(R87)

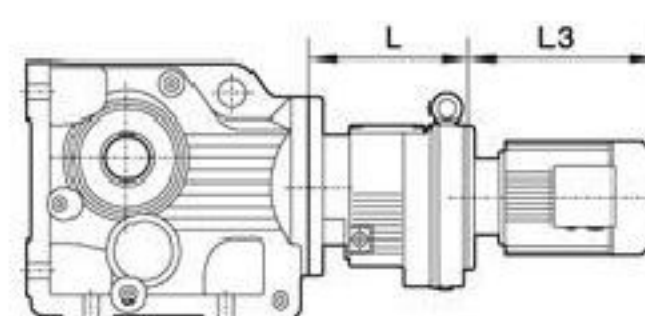

注:其余尺寸见
相对应结构
形式


Note:For other
values please
refer to the o-
pposited stru-
cture.

When equipping the user's motor or the special
one,the flange is required to connected.


Y2电机机座号 Motor size 功率/4P Power/(kW)	132M	160M	160L	180M	180L	200	K..127R77		K..127R87		280S	280M
							L	230	L	275		
L3	424	567	602	583	616	654	674	696	775	847	847	847
G	275	330	330	380	380	420	470	470	510	580	580	580
L2	132	132	132	132	132	132	143	143	174	174	174	174

注:1.KA、KF、KAF、KAZ壳体为通用件,安装尺寸均可相互参照。 2."K.."表示K、KA、KF、KAF、KAZ、KAB。


K157

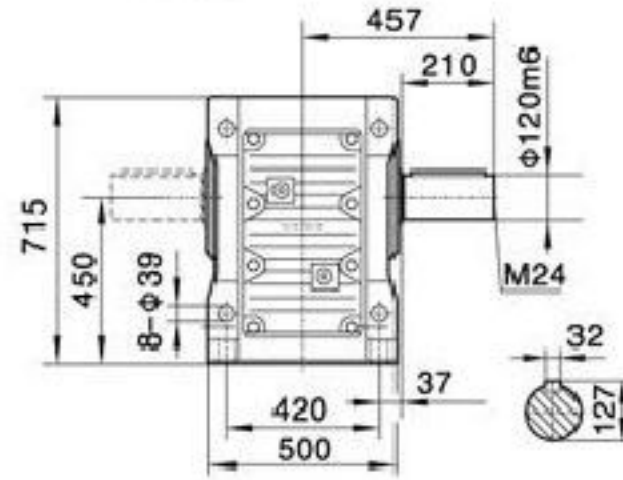


KA(KAB)157

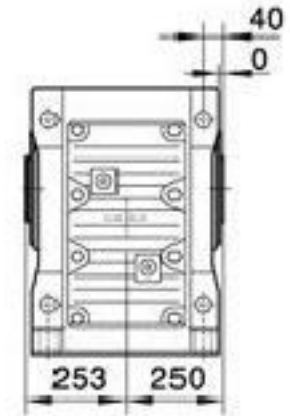


KAZ157

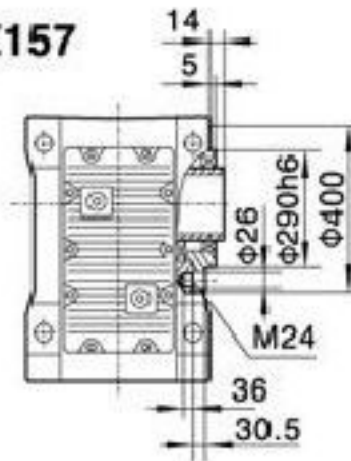


KA157/KAF157/KAZ157
空心轴/Hollow shaft

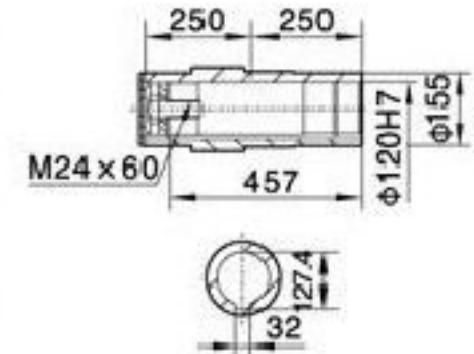



KF157

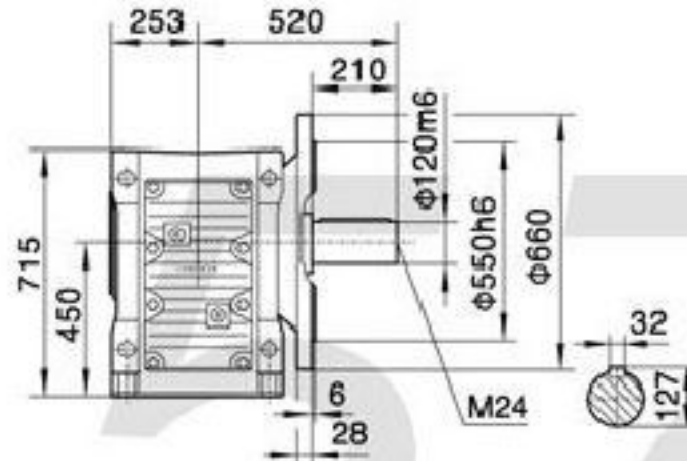


KAF157

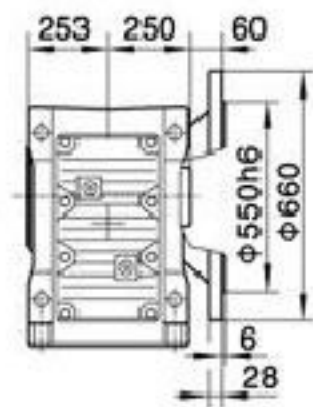


KAT157

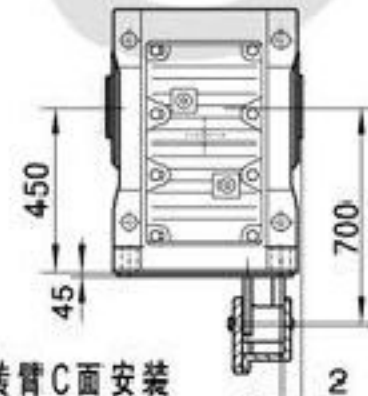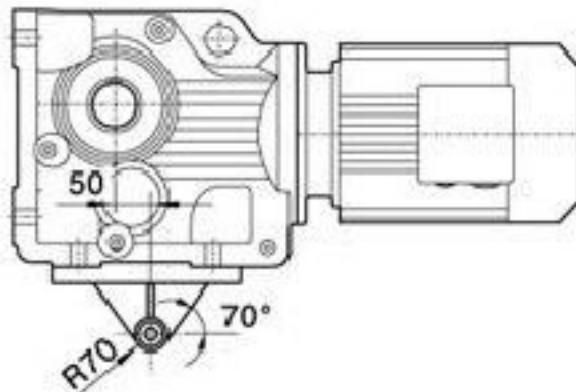


防转臂C面安装
C side of torque-arm

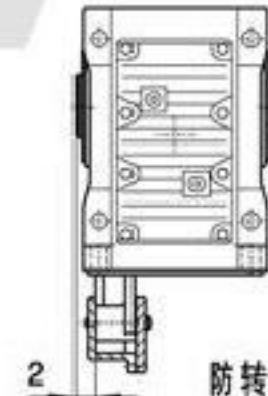


防转臂D面安装
D side of torque-arm




电机需方配或配特殊电机时
需加联接法兰

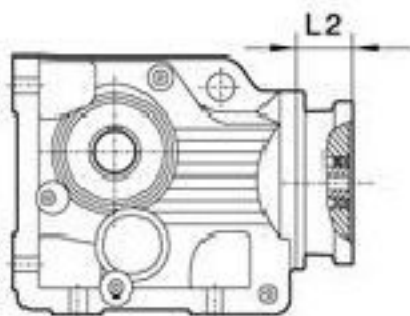

K..S157

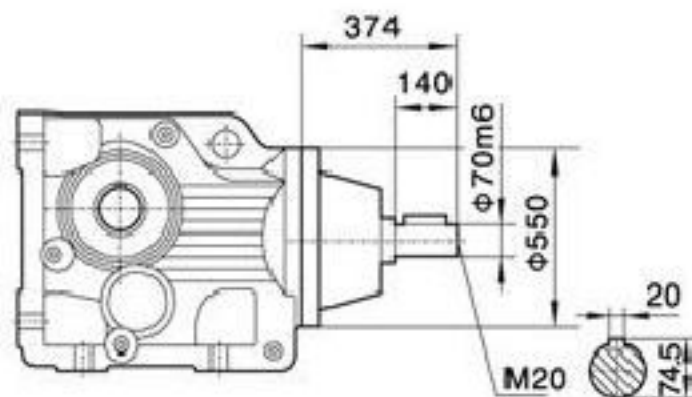

K..157R97(R107)

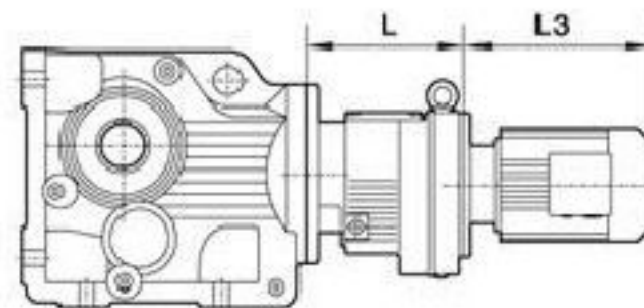

注:其余尺寸见
相对应结构
形式


Note:For other
values please
refer to the o-
pposited stru-
cture.

When equipping the user's motor or the special
one,the flange is required to be connected.


Y2电机机座号 Motor size	160M	160L	180M	180L	200	225S	225M	250	280S	280M	315S	315M	315L
功率/4P Power/(kW)	11	15	18.5	22	30	37	45	55	75	90	110	132	160
L3	567	602	635	666	642	669	691	770	828	879	1100	1180	1270
G	330	330	380	380	420	470	470	510	580	580	645	645	645
L2	143	143	143	143	143	143	143	143	143	143	145	145	145

注:1.KA、KF、KAF、KAZ壳体为通用件,安装尺寸均可相互参照。 2."K.."表示K、KA、KF、KAF、KAZ、KAB.

K167

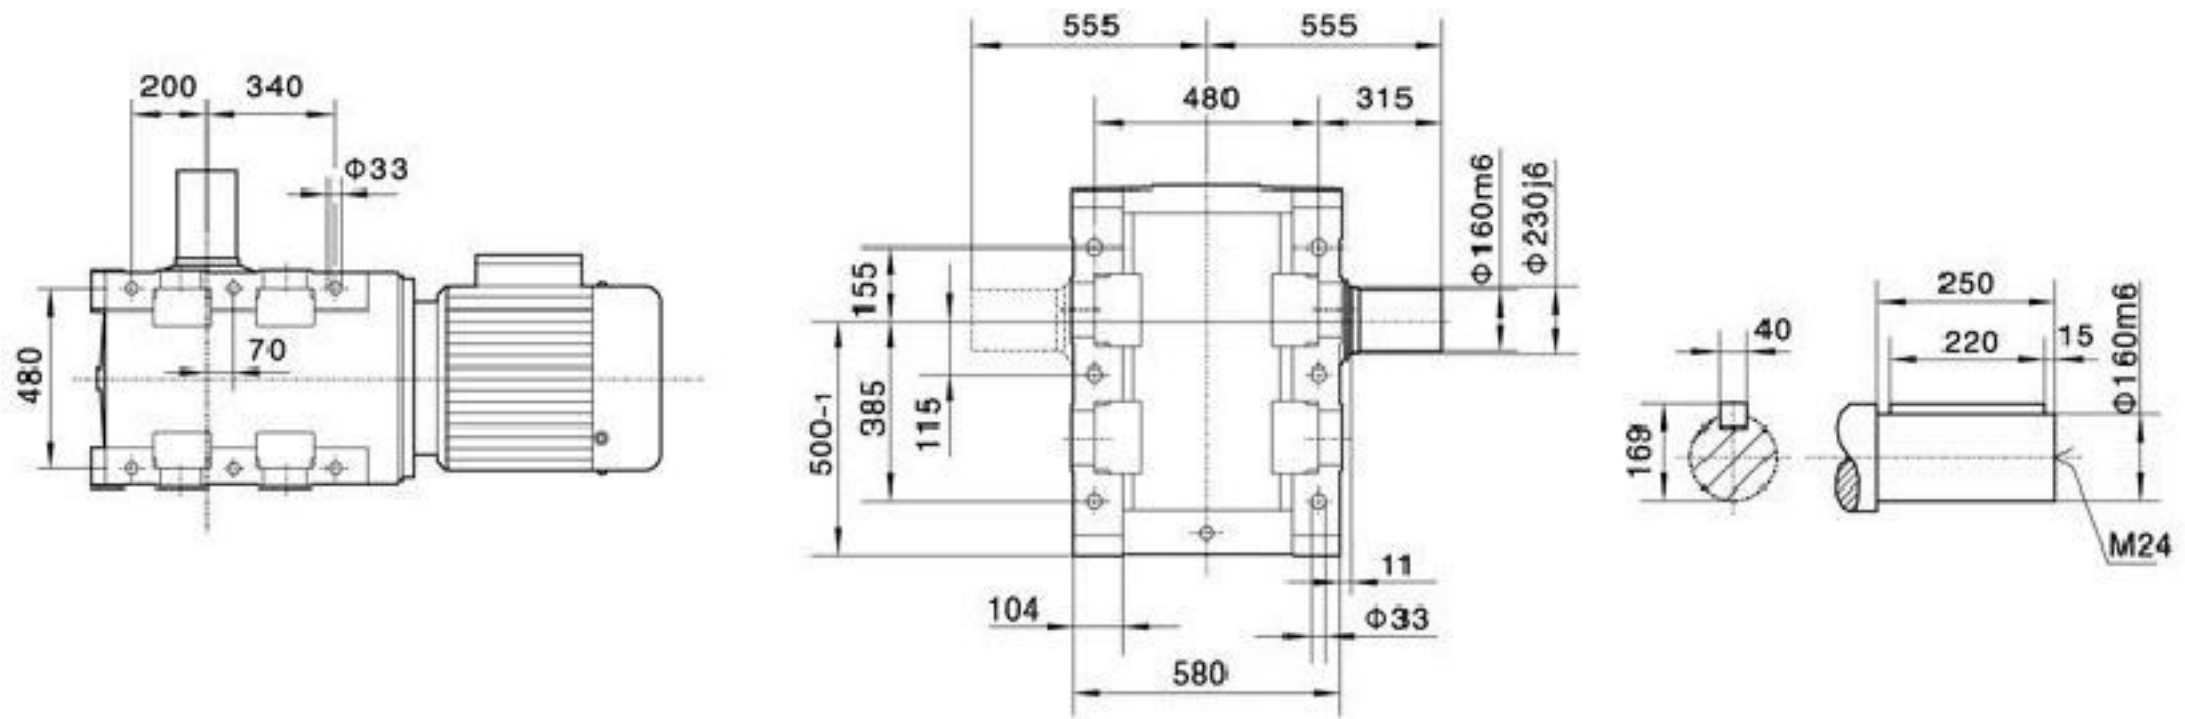


KA167

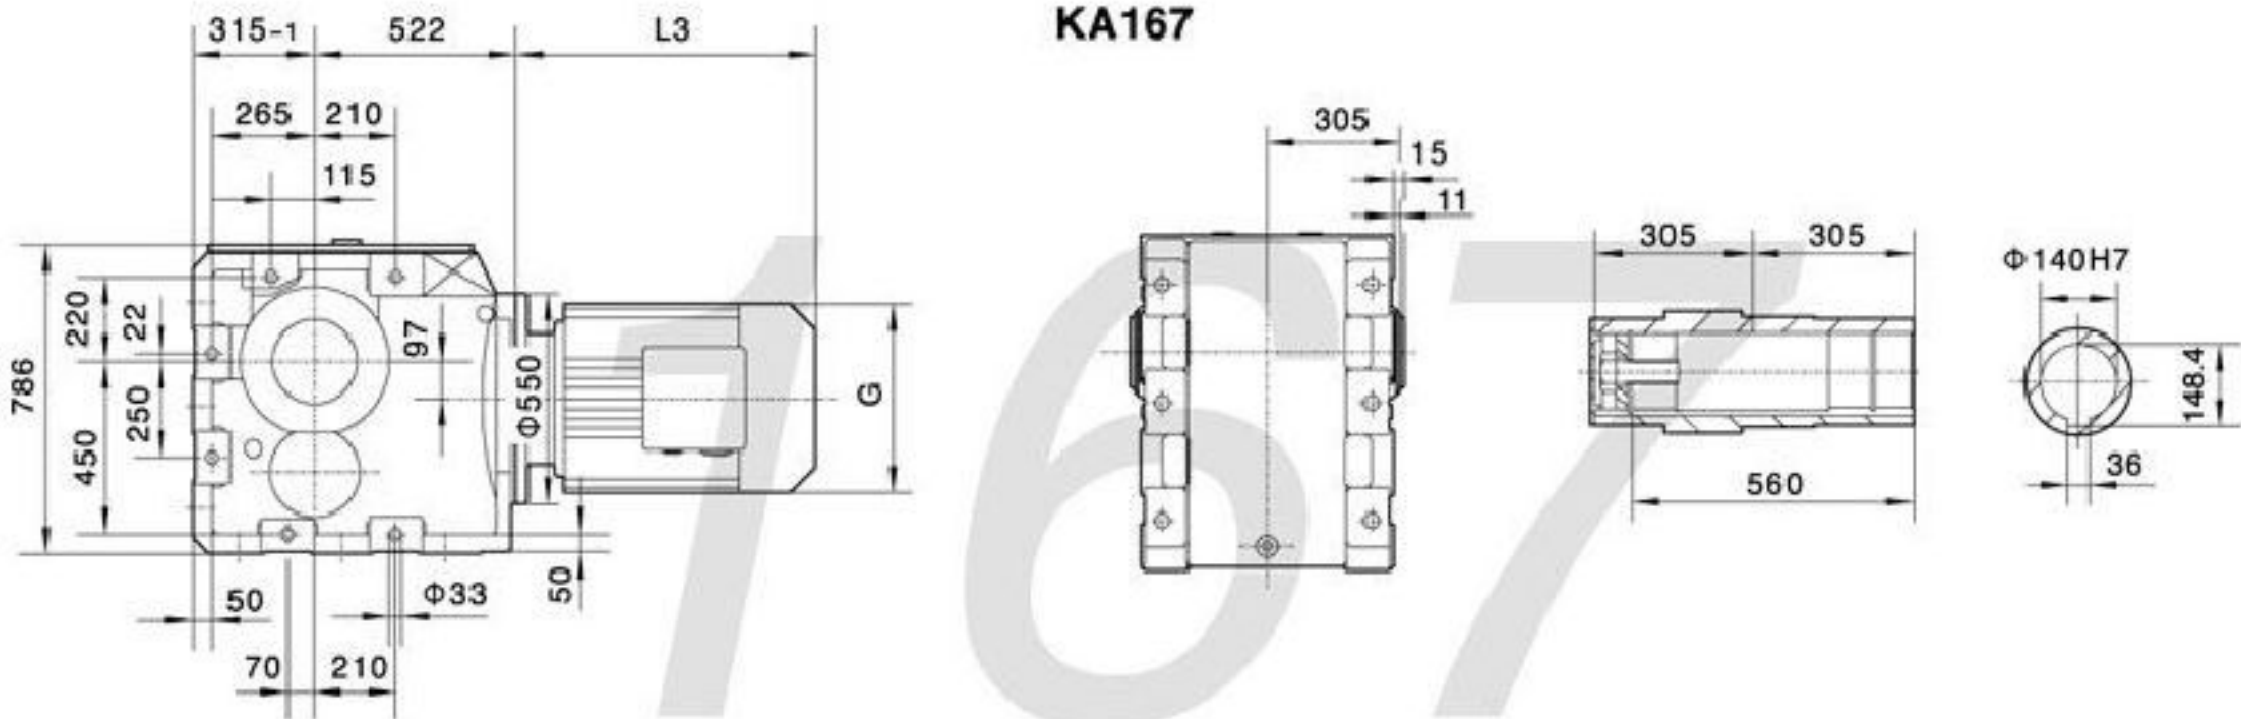


电机需方配或配特殊电机时
需加联接法兰

K..S167

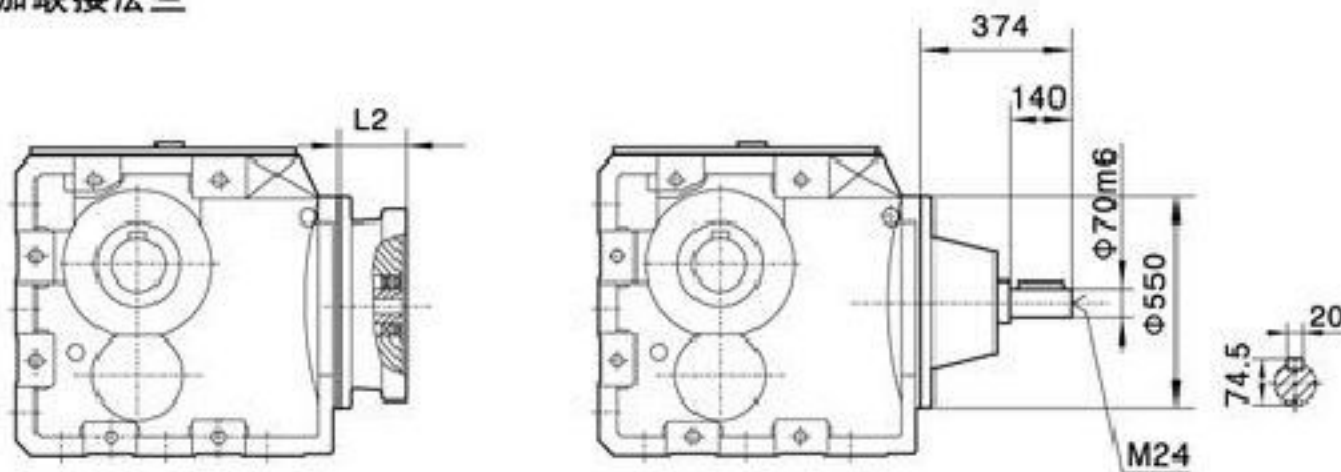

K..167R97(R107)

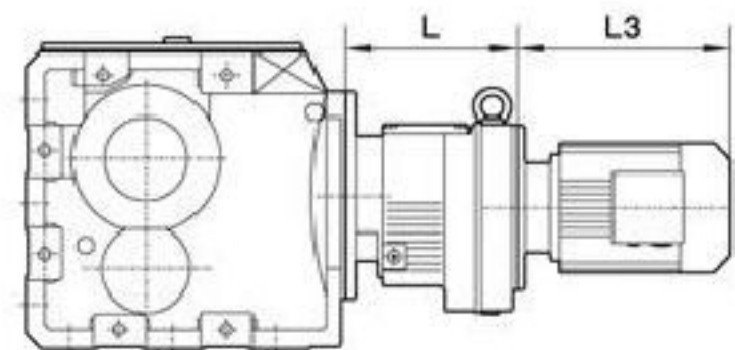

When equipping the user's motor or the special one, the flange is required to be connected.


注:其余尺寸见相对应结构形式

Note: For other values please refer to the opposited structure.


Y2电机机座号 Motor size 功率/4P Power/(kW)											K..167R97		K..167R107	
											L	320	370	
160M	160L	180M	180L	200	225S	225M	250	280S	280M	315S	315M	315L	160	200
11	15	18.5	22	30	37	45	55	75	90	110	132	160	160	200
L3	567	602	635	666	642	669	691	770	828	879	1100	1180	1270	
G	330	330	380	380	420	470	470	510	580	580	645	645	645	
L2	143	143	143	143	143	143	143	143	143	143	145	145	145	

注:1.KA、KF、KAF、KAZ壳体为通用件,安装尺寸均可相互参照。 2."K.."表示K、KA、KF、KAF、KAZ、KAB.

K187

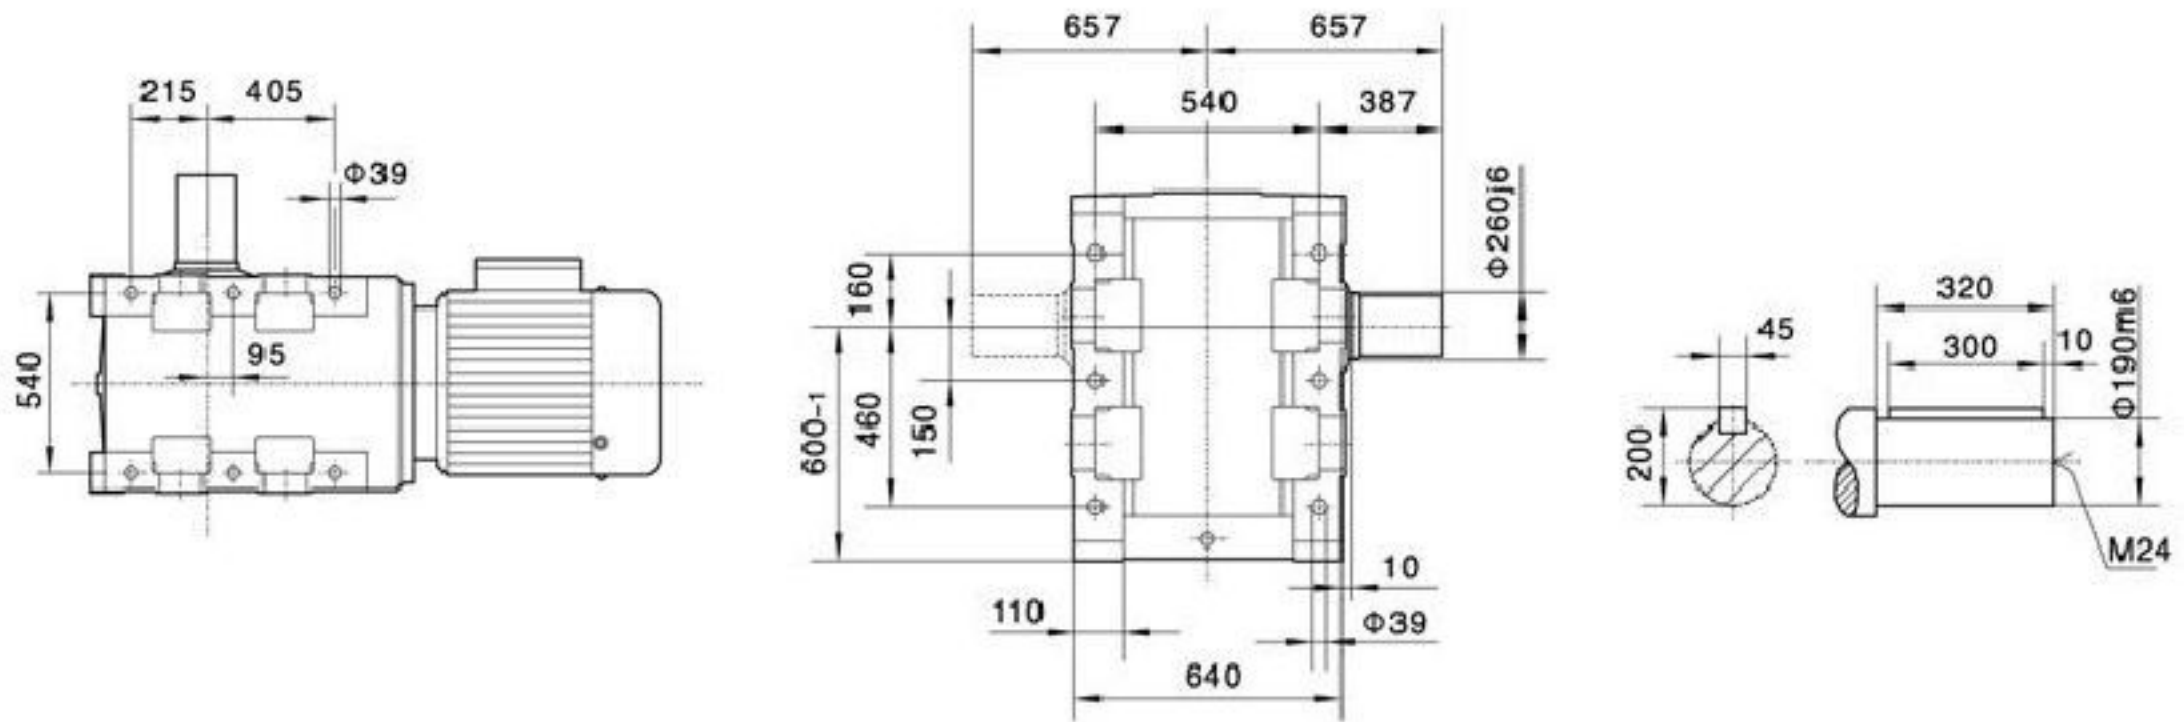


KA187

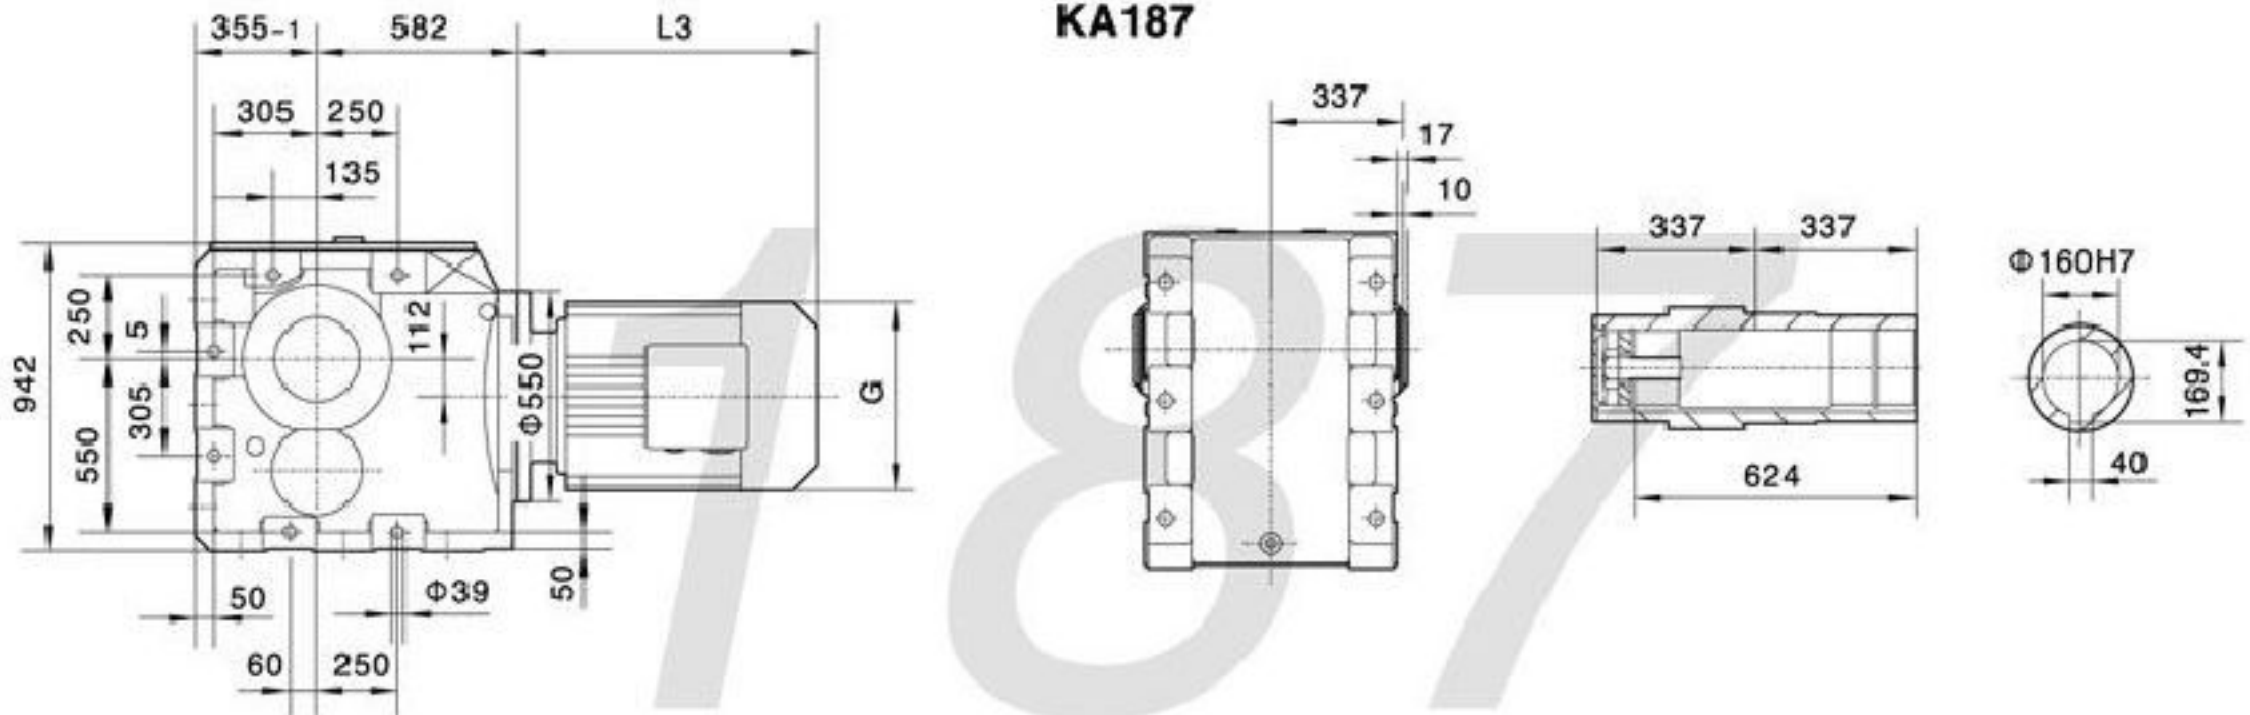


电机需方配或配特殊电机时
需加联接法兰

K..S187

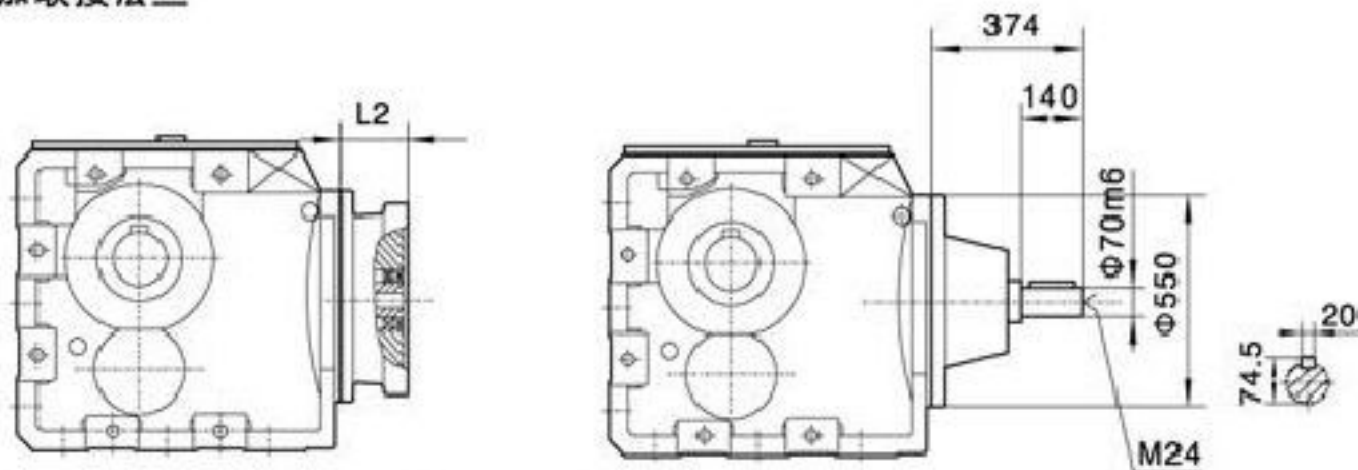

K..187R97(R107)

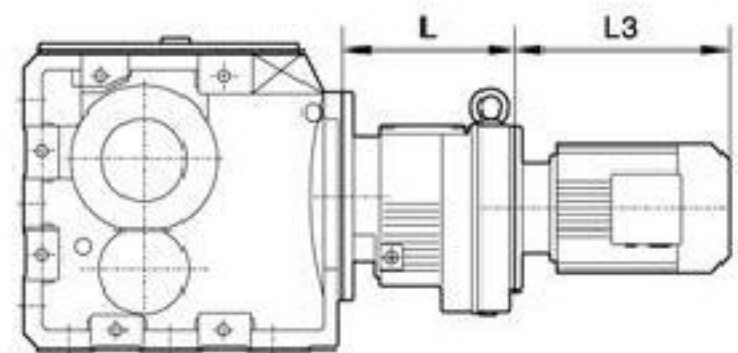

When equipping the user's motor or the special one, the flange is required to be connected.

注:其余尺寸见相对应结构形式

Note: For other values please refer to the opposite structure.

Y2电机机座号 Motor size	160M	160L	180M	180L	200	225S	225M	250	280S	K..187R97		K..187R107	
										L	320	370	200
功率/4P Power/(kW)	11	15	18.5	22	30	37	45	55	75	90	110	132	160
L3	567	602	635	666	642	669	691	770	828	879	1100	1180	1270
G	330	330	380	380	420	470	470	510	580	580	645	645	645
L2	143	143	143	143	143	143	143	143	143	143	145	145	145

注:1.KA、KF、KAF、KAZ壳体为通用件,安装尺寸均可相互参照。 2."K.."表示K、KA、KF、KAF、KAZ、KAB.